

## Instructions – SZ2

The **Glass Assembly** includes both mirror lens and its plastic housing.

### Removing the old glass assembly

1. Always wear safety glasses and gloves when handling glass
2. Tilt glass assembly up, as shown in image (a).
3. Loosen the screws behind the glass assembly with a screwdriver, as shown in image (b).
4. Remove glass assembly by hand or screwdriver. Using the leverage underneath the glass, carefully tilt up and out until removed.

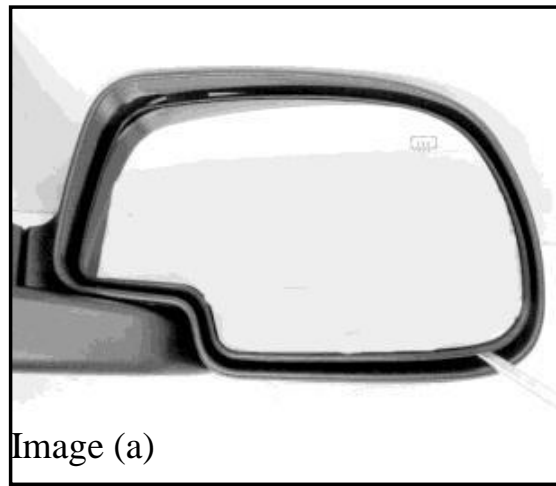


Image (a)

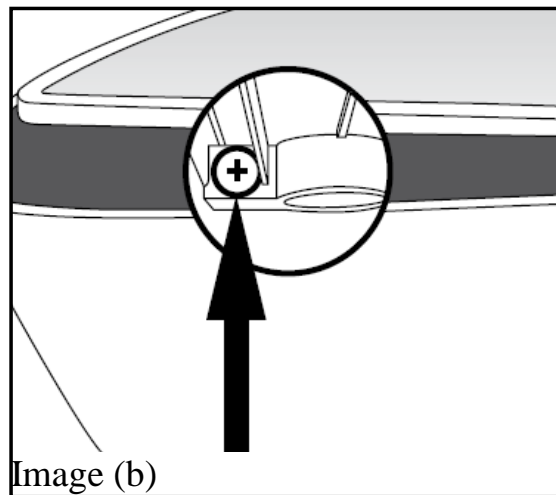


Image (b)

### Installation

1. Place one hand in the center of the glass and the other behind the mirror housing and press together to snap the glass assembly onto the ball joint. You will hear and feel it snap in to place, as shown in image (c).  
**\*We recommend placing a towel over the glass to avoid any possible injury.**
2. Once glass is in place, tilt glass upward and tighten the screw for firmness, as shown in image (b).
3. If installed correctly, glass should sit firmly in place, only moving for adjustment.

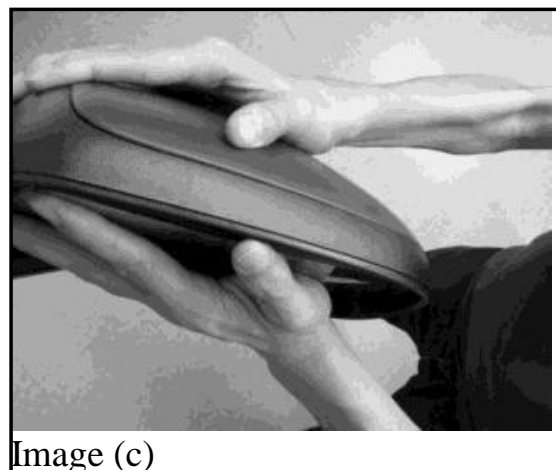


Image (c)

### Warning

**\*Always keep one hand on the glass assembly when removing or installing to keep glass from falling and breaking. Always wear proper safety equipment when handling glass**