


## COVERED SERVICE BODY FIT GUIDE



### FOUR EASY STEPS.

1. Mounting width (Dimension A) must be in the range 67.5" to 81.5". Locate feet (left to right) about 1" inboard from shoulder if possible.
2. Shoulder width (Dimension B) must be less than 86.5".
3. Body width at bottom of shoe (Dimension C) must be less than:
  - a. 96.5" for **Models #40953** and **#40973**. Measure this body width at a distance of 17.5" down from the shoulder (Dimension C).
  - b. 96.5" for **Model #40993**. Measure this body width at a distance of 27.5" down from the shoulder (Dimension C).
4. Crown height above foot mount location (Dimension D) must be less than 6".

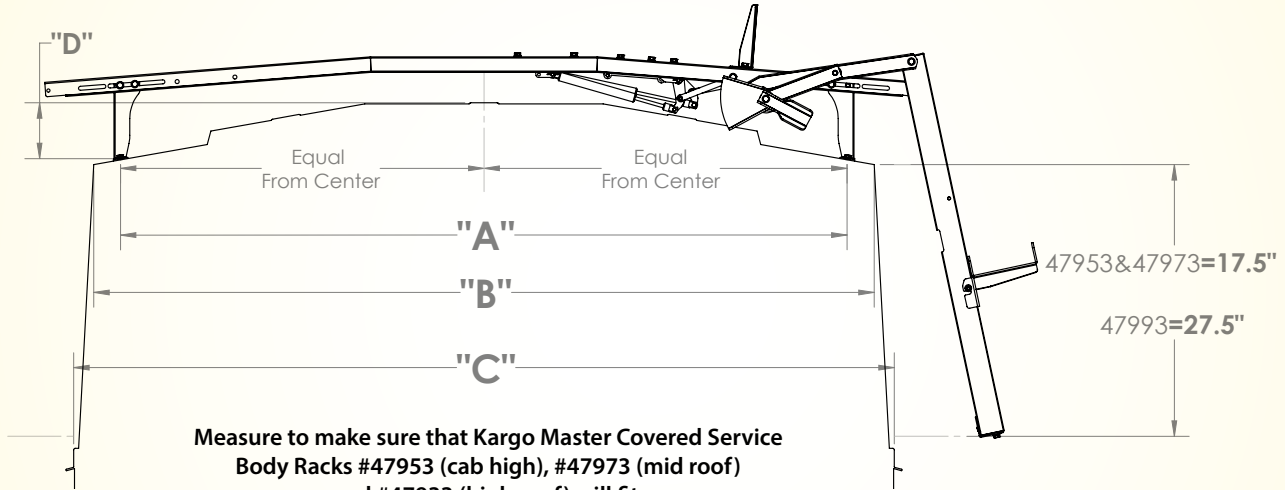

LADDER RACKS FOR COVERED SERVICE BODIES	PART #
<b>LOW ROOF SINGLE AND DOUBLE WHEEL</b>	
Single Low Roof Covered Body EZ Drop Down Ladder Rack	47953
Clamp & Lock Mechanism Only	40813
Drop Down Mechanism Only	40963
Double Low Roof Covered Body EZ Drop Down Ladder Rack	47953 + 40963
Combo Low Roof Covered Body Ladder Rack	47953 + 40813
<b>MID ROOF SINGLE AND DOUBLE WHEEL</b>	
Single Mid Roof Covered Body EZ Drop Down Ladder Rack	47973
Mid Roof Drop Down Mechanism Only	40983
Double Mid Roof Covered Body EZ Drop Down Ladder Rack	47973 + 40983
<b>HIGH ROOF SINGLE AND DOUBLE WHEEL</b>	
Single High Roof Covered Body EZ Drop Down Ladder Rack	47993
High Roof Drop Down Mechanism Only	40913
Double High Roof Covered Body EZ Drop Down Ladder Rack	47993 + 40913