










KC HiLITES

C-SERIES LED Light Bars

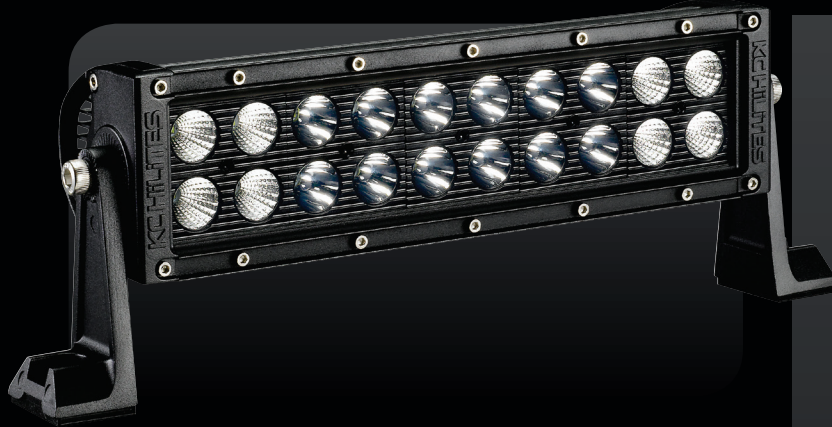

PHOTOMETRICS

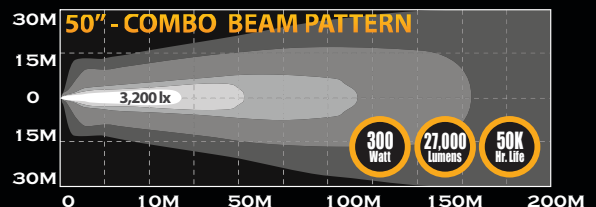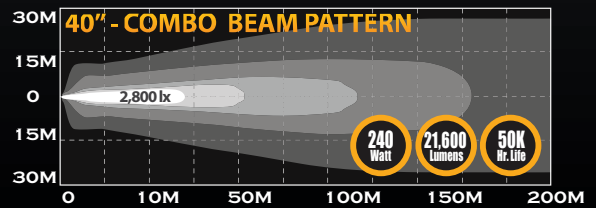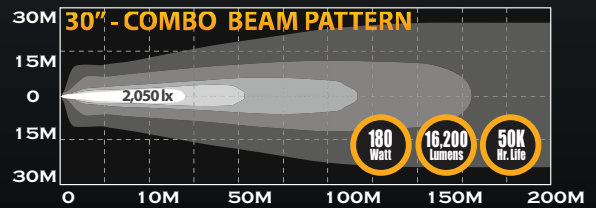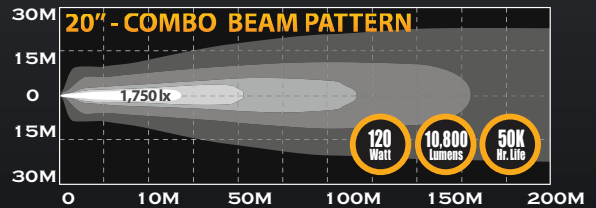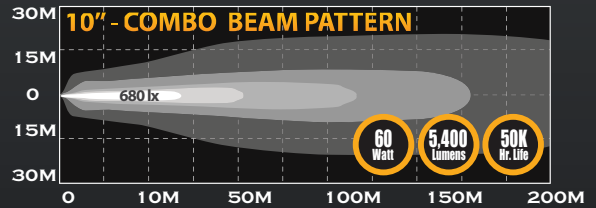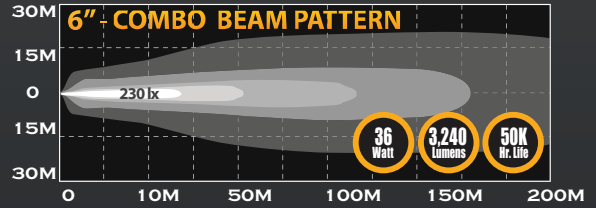


C-SERIES LIGHT BARS

up to **300 Watt**

FEATURES

- Available in 6, 10, 20, 30, 40 and 50-Inch Models
- CREE 3-Watt XBD LEDs
- Combo Beam: 12° Spot & 30° Spread
- 6000K Color Temperature
- 50,000 Hour LED Life
- IP67 Rated Extruded Aluminum Housings with Die-Cast Mounting Brackets
- End Caps with GORE® Vent Membranes for Extreme Resistance to Moisture and Dust
- On-Board Thermal Management
- Operates on 9 to 32 Volts
- Includes Wiring Harness with Waterproof Connectors

DIMENSIONS

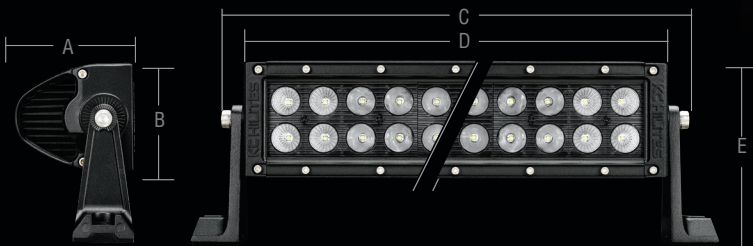

KC C-SERIES LIGHT BARS 6" - 50"

Part No.	Model / Description	Beam Pattern	No. of LEDs	Watts	Amps	Lumens	LUX @10M	Dimensions				
								A	B	C	D	E
314	C6 - 6" LED Light Bar	Combo	12	36	2.20	3,240	230	3.40"	3.09"	8.88"	7.38"	4.72"
316	C10 - 10" Amber LED Light Bar	Combo	20	60	3.60	5,400	275	3.40"	3.09"	12.88"	11.38"	4.72"
317	C20 - 20" Amber LED Light Bar	Combo	40	120	8.20	10,800	590	3.40"	3.09"	22.88"	21.38"	4.72"
334	C10 - 10" LED Light Bar	Combo	20	60	3.60	5,400	680	3.40"	3.09"	12.88"	11.38"	4.72"
335	C20 - 20" LED Light Bar	Combo	40	120	8.20	10,800	1,750	3.40"	3.09"	22.88"	21.38"	4.72"
336	C30 - 30" LED Light Bar	Combo	60	180	12.00	16,200	2,050	3.40"	3.09"	32.88"	31.38"	4.72"
337	C40 - 40" LED Light Bar	Combo	80	240	15.90	21,600	2,800	3.40"	3.09"	42.88"	41.38"	4.72"
338	C50 - 50" LED Light Bar	Combo	100	300	19.75	27,000	3,200	3.40"	3.09"	52.88"	51.38"	4.72"