

K&N Installation Instructions **Part Number 33-2250**

This filter fits: See catalog for current listings

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure **MUST be followed to ensure a proper fit and seal of the K&N Filtercharger®.**

- 1) Loosen the hose clamp on the intake hose at the airbox and remove the hose from the airbox.
- 2) Remove the air temperature sensor connector from the sensor.
- 3) Remove the airbox lid from the vehicle.
- 4) Remove the old filter.
- 5) Wipe any dirt out of the lid or base. The airbox lid must be clean and dry so that the gaskets will stick to it.
- 6) Apply the self-adhering gasket. (See fig. 1)
- 7) Install the K&N air filter into the airbox base.
- 8) Re-install the airbox lid and reconnect the air temp sensor, also install the intake hose.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

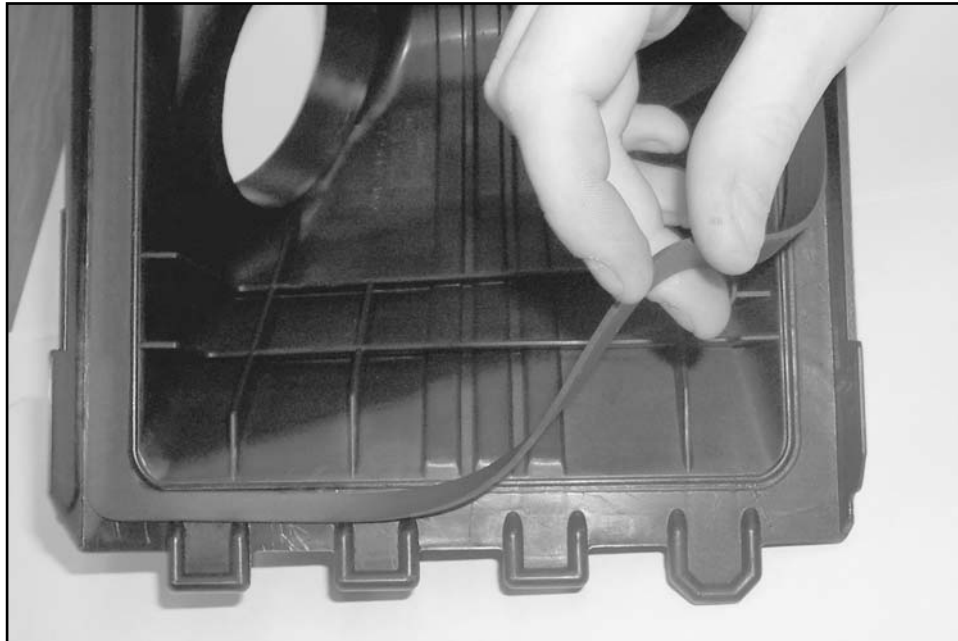


Fig. 1