

INSTALLATION INSTRUCTIONS Part Number: VF3017

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

K&N[®] <u>Cabin Air Filters replace your vehicle's stock cabin filter with a reusable design</u> that cleans and freshens incoming air. They are electrostatically charged to grab and hold dust particles. K&N[®] cabin air filters help control odors while they help capture most mold, mildew, fungus, spores, bacteria and germs. When they get dirty they can be cleaned and reused and best of all, they come with a 10 year/Million mile limited warranty.

When applicable, refer to owner's manual for manufacturers installation/removal instructions. The following are helpful steps when replacing/servicing cabin air filter with K&N[®] cabin air filter.

- 1. Locate the access panel under the hood (passenger side). Fig. 1
- 2. Lift the rubber seal off of the access panel. Fig. 2
- 3. Locate and remove the three plastic rivets by taking the center pins out and then removing the bases. Fig. 3 & 4
- 4. Remove the access panel by lifting up and sliding it towards the center of the vehicle. Fig. 5
- 5. Remove the cabin filter top cover by pressing in the tab on the side. Fig. 6 & 7
- 6. Remove the dirty cabin filter and clean any debris that might be present in the cabin filter housing. Fig. 8
- 7. Install the K&N® cabin filter. Fig. 9
- 8. Reverse steps 1 5 to complete the installation. With the Cabin Filter installed, apply the K&N[®] Stop Decal. The decal will help notify others that this is a reusable cabin filter.

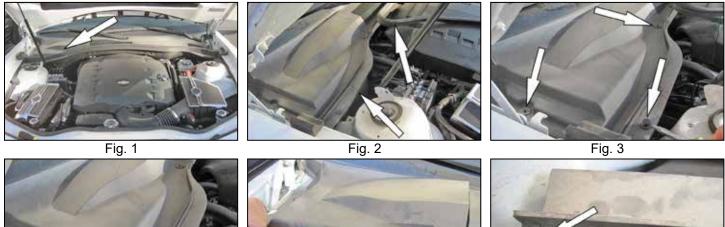




Fig. 4



Fig. 7

Fig. 8

Fig. 9

We recommend refreshing your K&N[®] Cabin Air Filter every 12 months, or 12,000 miles. Use K&N[®] Refresher kit pt.# 99-6000 which includes the easy to follow instructions.