


KRYPTONITE®

KryptoFlex® 815 Combo Cable

Diagram 3

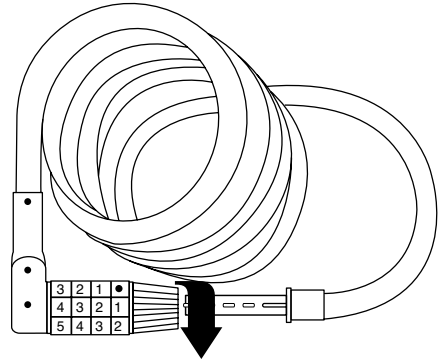

- ❶ Guide Points
- ❷ Reset Collar
- ❸ Lock Post

To set your own combination:
Your new lock is pre-set to open at
0-0-0-5.

1. Open the lock by aligning the pre-set combination number to the Guide Points and pull out the Lock Post. **(Figure 1)**
2. Turn the Reset Collar clockwise until it comes to a stop. **(Figure 2)**
3. Turn the number dials to your own personal combination, such as a phone number, birthday, etc.
4. After setting your personal combination, turn the Reset Collar counter-clockwise until it comes to a stop at its original position. **(Figure 3)**
5. Write down your combination and keep in a safe place. Your lock is now ready to use.

The reset operation is now complete.
Repeat steps 1-5 anytime you wish to
change your personal combination.

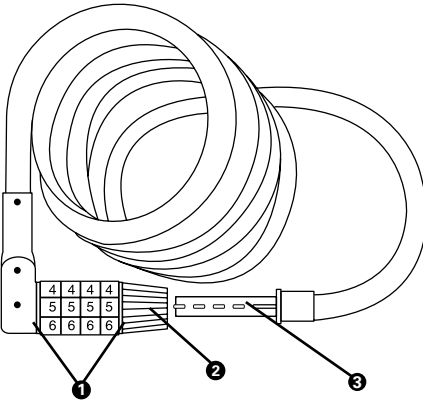


Diagram 1


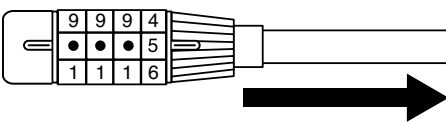


Diagram 2

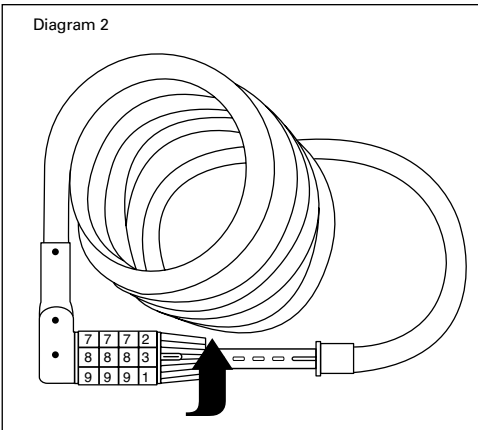


KRYPTONITE
TOUGH WORLD. TOUGH LOCKS.

KryptoFlex™ Combo Series

INS-KrypFlxCombo
REV 0107B




USA

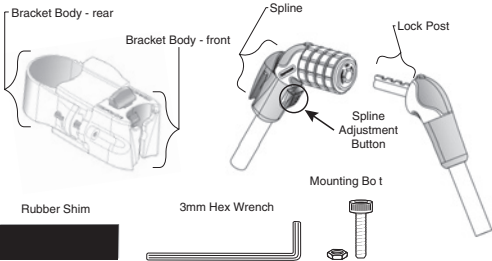

EZ-MULTIFIT BRACKET INSTRUCTIONS:

To install your bracket, first select your preferred mounting position on your bicycle frame. We recommend **A, B or C** as shown in the diagram below (Figure 2a). Attach bracket body to frame by wrapping strap around bike tube. Place rubber shim between bike tube and strap. Slide strap through locking tab on bracket body until bracket body is snugly attached to tube (Figure 2b).

Adjust for proper orientation of bracket body on bike tube and tighten strap adjustment bolt with 3mm hex wrench (provided) — (Figure 2c). Trim off excess strap. Note: Do not cut excess strap if bracket is to be reinstalled on a larger frame tube.

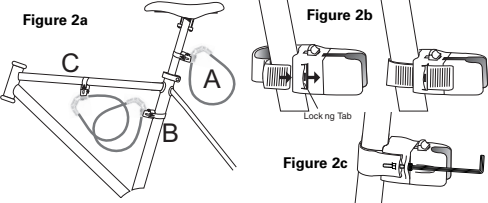

ADJUSTING STRAP:

Loosen strap adjustment bolt with 3mm hex wrench. Tighten or loosen strap to desired position. Retighten strap adjustment bolt.


SPLINE ADJUSTMENT:

The spline location on your new lock is factory preset and may need to be adjusted to your bike before using. To adjust spline to easily use your lock, please follow these steps.

1. Slide spline release button in a downward direction with your thumb (Figure 3a).
2. Rotate spline to the best pre-set location for ideal carrying position (Figure 3b).
3. Return button upward to original position. Release the button. Make sure the spline is in a locked position by trying to twist it to the left and right.


If further adjustment is needed to change positioning, repeat steps 1-3.

Note: When lock is attached to the bracket secure cable with Hook & Loop strap to keep cable in place while riding.

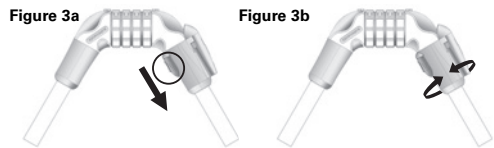


SECURING/REMOVING LOCK FROM BRACKET:

Attach lock to bracket body by sliding spline into bracket as shown (Figure 4a). Remove lock from bracket by pushing silver release button back and lifting lock out as shown (Figure 4b).

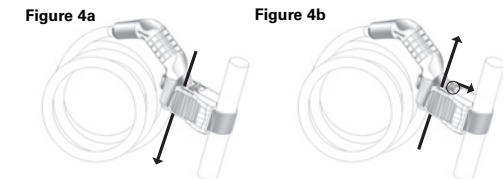

REMOVING BRACKET FROM BICYCLE:

Place the head of a flat-head screwdriver into the slot of the locking tab. Lift handle of screwdriver (as shown) while pulling strap out. (Figure 5).



ROTATING BRACKET BODY FRONT:


For a different fit on bicycle frame, rotate bracket body front 90 degrees.

Remove mounting bolt (Figure 6a). Separate front and rear bracket body (Figure 6b).

Move spring from hole A to hole B on bracket body rear (Figure 6c).

Rotate bracket body front 90-degrees and reinstall with mounting bolt. Make sure to properly align spring and release button (Figure 6d).

Note: Excess strap must be trimmed in order to rotate bracket body front.

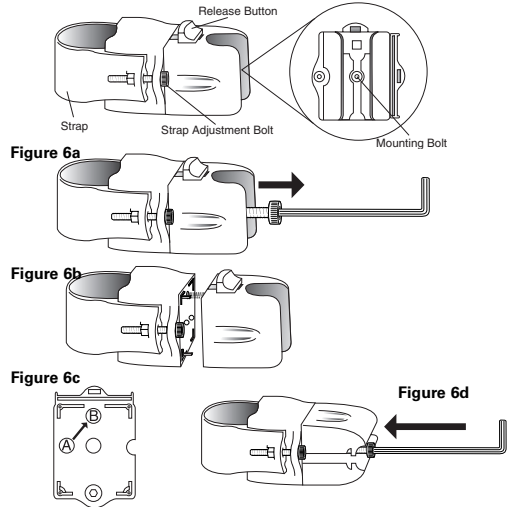

PROPER BICYCLE LOCK UP:

Place your bike against a permanent object, like a pole or bike rack that is cemented or otherwise anchored to the ground. Remove your front wheel and place it by your rear wheel. Wrap cable through both wheels, around frame and around the fixed object and secure. Cable locks are deterrent security only.

SECURITY REMINDERS:

Lock in a well lit area. Position your lock with key mechanism facing down. Don't lock your bike or vehicle to itself or to objects that can be easily cut, or vehicle lifted over (chain link fence, small tree, short sign). Don't lock in the same location all the time. Don't position the lock near the ground to prevent thieves from attempting to leverage or crush the lock.

TO SET YOUR OWN COMBINATION:

Your new lock is preset to open at 0-0-0-5 at the factory.

1. Open the lock by aligning the opening combination number to the Guide Points and pull out the Lock Post. (Figure 7)
2. Push down the two Reset Buttons simultaneously with thumb and forefinger, and turn counterclockwise until it comes to a stop. (Figure 8)
3. You are now ready to turn the dials to set your secret combination, such as a phone number, birthday, etc.
4. After setting your secret combination, turn the two Reset Buttons again by Thumb and Forefinger clockwise until it comes to a stop and back to its original position.
5. Verify your new combination before using your lock. Insert the Lock Post all the way into the Locking Port but do not turn the dials. Pull out the Lock Post. Your lock is ready to use.
6. The reset operation is now complete. Repeat steps 1-5 anytime you wish to change your secret combination.

COMBINATION REGISTRATION:

Please fill out the following information to register your combination. If you forget your combination, we'll have it at Kryptonite for you.

