

Warning! Protective eyewear should be worn when fastening and releasing the shock cords.

Make certain all shock cords are free from latches, pulleys, and belts before closing the hood. Failure to do so may result in damage to the Hood Mask.

Installation Instructions



Fig. 1

Lay the mask over the hood as shown in Fig. 1.

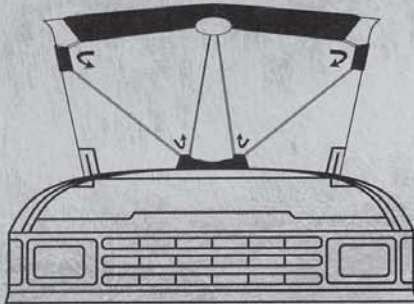


Fig. 2

Thread and attach the shock cord and S-hooks as shown in Fig. 2.

Care and Maintenance

- Wash and wax vehicle before installing Hood Mask
- Remove Hood Mask if it becomes wet and allow to dry completely before reinstallation.
- Do not allow dust or dirt to accumulate under Hood Mask; possible damage to paint may occur.
- Remove Hood Mask every two weeks, and if needed. Wash both the vehicle and Hood Mask.
- Clean Hood Mask with warm water, liquid dish soap and soft brush. Do not machine wash or place in dryer.
- Do not install Hood Mask on a vehicle that has been repainted.
- If Hood Mask flaps due to high wind or vehicle speed, immediately pull over and retighten, or remove the mask. Flapping can damage vehicle's paint.