


### 2002 - 2006 Nissan Sentra 2.5L Manifold CA

**Warning:** When working on, under, or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure a safe work area. Serious injury or death could occur if safety measures are not followed.

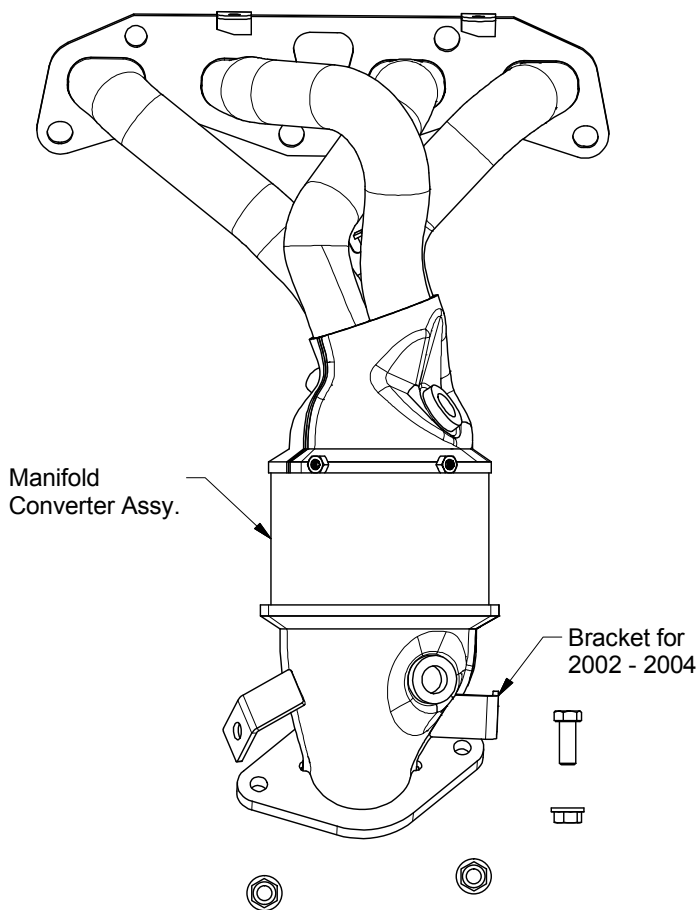

**Step 1:** (Carefully read all instructions before installation) Install the Manifold Converter by first loosely bolting the inlet flange to the cylinder head using the OEM hardware and supplied gasket. One of the rear welded support brackets must be bolted to the vehicle to prevent undue stress on the converter. Choose the correct bracket to use based on the year of your vehicle with the supplied fasteners. Refer to the diagram for which bracket is used on your year spread. Use the supplied donut gasket on the pipe. Loosely fasten the outlet pipe of the converter to the vehicles exhaust pipe using the OEM studs and springs along with the supplied nuts.

**Step 2:** Once the Manifold Converter is in final position all fasteners can be tightened to the manufacturers torque specifications.

**\*\* Magnaflow Performance Exhaust recommends professional installation on all their products**