




Mastercool[®]
"World Class Quality"

30 LB. AND 50 LB. DOT-APPROVED RECOVERY CYLINDERS

Features:

- Powder coated cylinder for high gloss, durable finish
- Y-valve for liquid/vapor
- 3/4" NPT opening accepts 80% fill float switch shut-off device
- Collar design for ease of handling
- Reusable and conforms to DOT-4BA400 specifications and ARI guidelines
- Australian Approved and TC Canadian (CAN/CSA-B339-02) Approved
- Pre-charged cylinder provides a clean, dry interior
- Storage and transport of recovered refrigerant gases
- Valve & Float Switch UL Listed

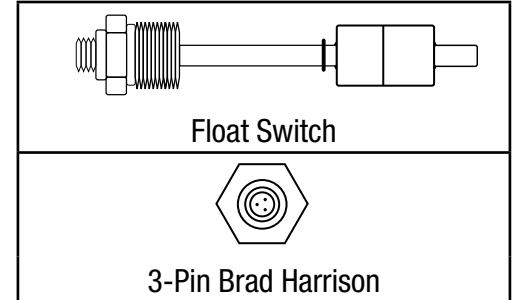

	30 lb.						50 lb.					
Model	62010 without float switch	62011 with float switch	62012 with float switch & NCG Port	64010 without float switch	67010 with float switch	67011 with float switch	63010 without float switch	65010 with float switch	66010 without float switch	66011 with float switch	66012 with float switch & NCG Port	63010-AUS without float switch (Australian standard)
Connection	1/4" FL-M (7/16-20)			1/2" ACME		1/2" ACME	1/4" FL-M (7/16-20)		1/2" ACME			1/2" ACME
Size (w x h)	9.125" x 17.52"			9.125" x 17.52"		9.125" x 17.52"	12.25" x 18.78"		12.25" x 18.78"			12.25" x 18.78"
Tare Weight	17.99 LB			17.99 LB		17.99 LB	28.71 LB		28.71 LB			28.71 LB
Standard Specification	DOT - 4BA400 CAN/CSA-B339-02			DOT - 4BA400 CAN/CSA-B339-02		DOT - 4BA400 CAN/CSA-B339-02	DOT - 4BA400 CAN/CSA-B339-02		DOT - 4BA400 CAN/CSA-B339-02			DOT - 4BA400
Nominal Water Capacity	>26.2 LB / 11.9 L			>26.2 LB / 11.9 L		>26.2 LB / 11.9 L	>47.7 LB / 21.6L		>47.7 LB / 21.6L			>47.7 LB / 21.6L
Service Pressure	400 PSI / 2.7 MPa			400 PSI / 2.7 MPa		400 PSI / 2.7 MPa	400 PSI / 2.7 MPa		400 PSI / 2.7 MPa			400 PSI / 2.7 MPa
Tank Test Pressure	800 PSI / 5.5 MPa			800 PSI / 5.5 MPa		800 PSI / 5.5 MPa	800 PSI / 5.5 MPa		800 PSI / 5.5 MPa			800 PSI / 5.5 MPa
Relief Valve Pressure	600 PSI / 4.1 MPa			600 PSI / 4.1 MPa		600 PSI / 4.1 MPa	600 PSI / 4.1 MPa		600 PSI / 4.1 MPa			600 PSI / 4.1 MPa
Air Tightness Test Pressure	400 PSI / 2.7 MPa			400 PSI / 2.7 MPa		400 PSI / 2.7 MPa	400 PSI / 2.7 MPa		400 PSI / 2.7 MPa			400 PSI / 2.7 MPa
Body Material	HP295			HP295		HP295	HP325 or HP345		HP325 or HP345			HP325 or HP345
Color	yellow/gray			blue		yellow/blue	yellow/gray		yellow/gray			white