

Automotive Replacement Information

Automotive Replacement Parts

Wheel Locks

McGard's Wheel Lock functions like a <u>regular lug nut on your wheel</u> but requires a special key (tool) for installation and removal. Here are some typical examples:



This is what a Wheel Lock looks like installed on a wheel:



Wheel Lock Key (tool)

Used with your lug wrench and are needed to remove and install Wheel Locks. Here are some typical examples:



Center Cap Locks

Security for alloy wheels with bolt-on lug covers (center caps) or wire basket wheels. Here are some typical examples:



LUG NUT & LUG BOLT Reference Chart





We call our lug nuts **Tough Nuts** because they're the strongest, safest, most durable lug nuts & bolts in the industry. Since their introduction in 1980, we have manufactured Tough Nuts to meet or exceed the highest OEM standards for safety and durability. Tough Nuts are so durable that we stand behind them with a lifetime written warranty. No chipping. No peeling. No rusting. Guaranteed! Tough Nuts are individually machined from alloy steel, heat treated and triple-nickel chrome plated. All can be installed with an impact wrench. Packaged 4 or 8 per pack or in bulk boxes of 50, 100 or 144.

Shank Style Lug Nuts




mank Styte Lug Nuts								•	
	5	DESCRIPTION	THREAD SIZE	HEX DIA.	OVERALL LENGTH	SHANK DIA.	SHANK LENGTH	PACKAGE OF 4	BOX/100
		Flat seat, regular mag.,	1/2-20	13/16"	1.65"	.679"	.746"	61000	69100
		stainless steel washers	7/16-20	13/16"	1.65"	.679"	.746"	61001	69101
		included.	M12 x 1.5	13/16"	1.65"	.679"	.746"	61002	69102
		<u></u>	M12 x 1.25	13/16"	1.65"	.679"	.746″	61003	69103
		Open-end drag racing, flat seat,	1/2-20	13/16"	1.6"	.679"	.490"	60127	69127*
		Centerline Convo Pro, stainless	7/16-20	13/16"	1.6"	.679"	.490"	60128	69128*
	_	steel washers included*.	M12 x 1.5	13/16"	1.6"	.679"	.490"	60129	69129*
		Flat seat, long mag.,	1/2-20	13/16"	1.85"	.679"	.946"	62000	N/A
		stainless steel washers	7/16-20	13/16"	1.85"	.679"	.946"	62001	N/A
		included.	M12 x 1.5	13/16"	1.85"	.679"	.946"	62002	N/A
		Open-end drag racing, flat seat,	1/2-20	13/16"	1.86"	.679"	.746"	61005	69105*
		regular mag., stainless steel	7/16-20	13/16"	1.86"	.679"	.746"	61006	69106*
	washers included*.	M12 x 1.5	13/16"	1.86"	.679"	.746"	61007	69107*	
		Flat seat, duplex mag.,	1/2-20	7/8"	2.425"	.740"	1.00"	62820**	N/A
		stainless steel washers	9/16-18	7/8"	2.425"	.740"	1.00"	62822**	N/A
	_	included.							
		Flat seat, Cragar extra	1/2-20	13/16"	2.27"	.679"	1.365"	63014	69314
		long, stainless steel	7/16-20	13/16"	2.27"	.679"	1.365"	63015	69315
	_	washers included.	M12 x 1.5	13/16"	2.27"	.679"	1.365"	63016	69316
		Open-end drag racing, flat seat,	1/2-20	13/16"	2.475"	.679"	1.365"	63000 offset	69300*
		Cragar extra long, stainless	7/16-20	13/16"	2.475"	.679"	1.365"	63001 center	69301*
		steel washers included*.	M12 x 1.5	13/16"	2.475"	.679"	1.365"	63002 center	69302*
			1/2-20	13/16"	2.475"	.679"	1.365"	63004 center	69300*

*Bulk sets of Drag Racing Lug Nuts do not include washers.

Cone Seat Lug Nuts



DESCRIPTION	THREAD SIZE	HEX DIA.	OVERALL LENGTH	PACKAGE OF 4	BOX/100
Cone seat, regular.	1/2-20	13/16"	1.5"	64000	69400
	1/2-20 black	13/16"	1.5"	64030	69430†
	7/16-20	13/16"	1.5"	64001	69401
	9/16-18	7/8"	1.75"	64008	69418
	9/16-18	13/16"	1.75"	N/A	69422
	M12 x 1.5	13/16"	1.5"	64002	69402
	M12 x 1.25	13/16"	1.28"	64003	69403
	M12 x 1.75	13/16"	1.815"	64019	69419
	M14 x 1.5	13/16"	1.565"	64038	69438
	M14 x 1.5	22mm	1.635"	64069	69469
	M14 x 1.5 black	22mm	1.635"	64072	69472†
	M14 x 1.5	13/16"	1.945"	64021	69428

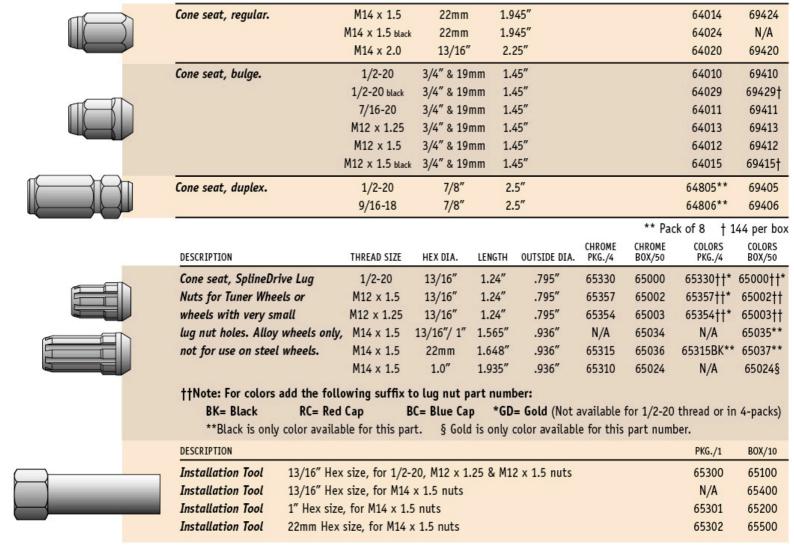

Luq Bolts

*For how to determine shank lengths see page 25.

Lock bolt applications/dimensions should not be used to cross reference/determine lug bolt applications.

		DESCRIPTION	THREAD SIZE	RADIUS	OVERALL LENGTH	SHANK LENGTH*	HEX DIA.	5 LUG INSTALL KIT	B0X/50
		Cone Seat	M12x1.5	- 1	54.1mm	25.5mm	17mm	67179	69779
			M12x1.5 black	-	54.1mm	25.5mm	17mm	67179BK	69779BK
			M14x1.5	-	57.5mm	28.0mm	17mm	67200	69700
			M14x1.5 black	-	57.5mm	28.0mm	17mm	67200BK	69700BK
			M14x1.5	-	57.5mm	30.5mm	17mm	67205	69705
			M14x1.5 black	-	57.5mm	30.5mm	17mm	67205BK	69705BK
			M14x1.25	-	53.2mm	27.4mm	17mm	67226	69726
			M14x1.25 black	-	53.2mm	27.4mm	17mm	67226BK	69726BK
		Radius Seat	M14x1.5	13mm	51.4mm	26.7mm	17mm	68018	69818
			M14x1.5 black	13mm	51.4mm	26.7mm	17mm	68018BK	69818BK
			M14x1.5	14mm	57.5mm	28.3mm	17mm	68020	69820
			M14x1.5 black	14mm	57.5mm	28.3mm	17mm	68020BK	69820BK
			M14x1.5	14mm	59.2mm	35.4mm	17mm	68032	69832
			M14x1.5 black	14mm	59.2mm	35.4mm	17mm	68032BK	69832BK
			M14x1.5	14mm	51.4mm	27.5mm	17mm	68174	69874
			M14x1.5 black	14mm	51.4mm	27.5mm	17mm	68174BK	69874BK
		<u> </u>			520	2.13	27	00174510	03074510