




## Kia Amanti 2004-2006

### KIT FEATURES

- ISO DDIN radio provision

### KIT COMPONENTS

- A) Radio housing • B) Radio brackets • C) A/C control brackets

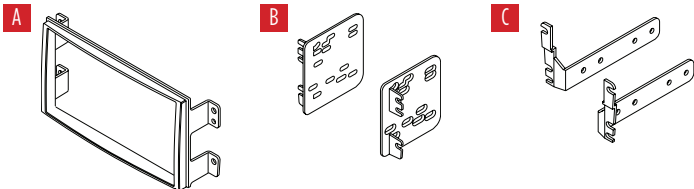

### TABLE OF CONTENTS

|                                |   |
|--------------------------------|---|
| Dash Disassembly .....         | 2 |
| Kit Assembly .....             | 3 |
| –ISO DDIN radio provision..... | 3 |

### WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: 70-7301

Antenna Adapter: Not required

### TOOLS REQUIRED


- Panel removal tool • Phillips screwdriver

**CAUTION!** All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.


## DASH DISASSEMBLY

1. Unclip and remove panel surrounding shifter including cup holders. (Figure A)
2. Remove (2) Phillips screws at base of panel surrounding radio and a/c controls. (Figure B)
3. Unclip and remove panel surrounding radio and a/c control. (Figure C)
4. Remove (6) Phillips screws securing radio and a/c control. (Figure D)
5. Remove (4) Phillips screws securing factory a/c control to bracket assembly. (Figure E)


Continue to Kit Assembly

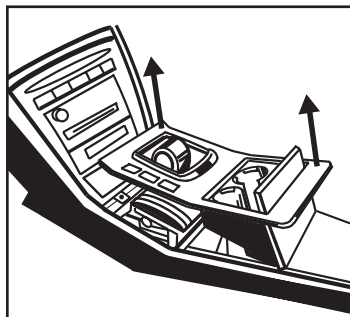


(Figure A)

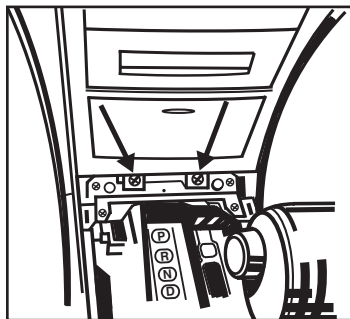


(Figure B)

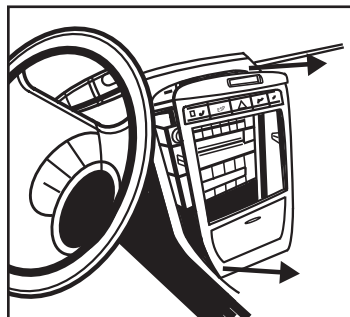

(Figure C)

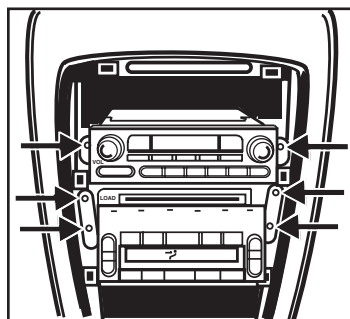

(Figure D)

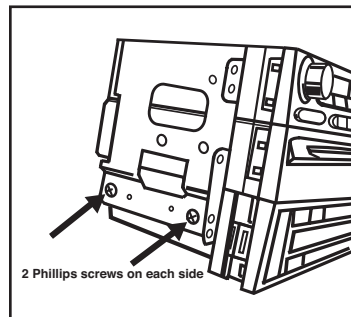

(Figure E)


## KIT ASSEMBLY

### ISO DDIN radio provision


1. Attach the corresponding *a/c control brackets* to the factory *a/c control* using the factory hardware. (Figure A)

**Note:** *The radio housing must be installed first before the a/c control.*


2. Secure the *radio brackets* to the radio with screws supplied with the radio. (Figure B)
3. Slide the radio into the radio opening of the sub-dash.
4. Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or AXXESS. Test the radio for proper operation.
5. Secure the *radio housing* onto the completed assembly using the factory screws. (Figure C)
6. Reassemble the dash in reverse order of disassembly.



(Figure A)

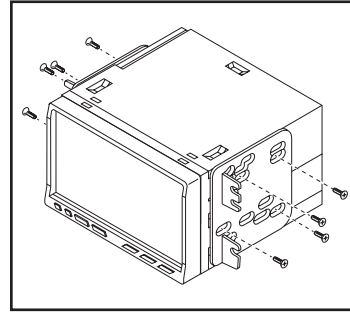

(Figure B)

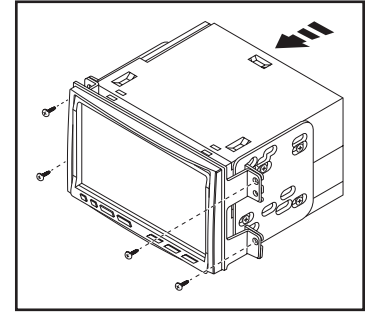

(Figure C)