



INSTALLATION INSTRUCTIONS FOR PART 99-7524B

APPLICATIONS

Mazda 6 2006-2008 99-7524B


KIT FEATURES

- Double DIN radio provision
- ISO DIN radio provision with pocket
- **Painted black**



KIT COMPONENTS

- A) Radio/Climate Control Housing • B) Radio Brackets • C) Pocket • D) (4) #8 x 3/8" Phillips Screws
- E) (6) Plastic Panel Clips • F) Harness • G) (2) #8 x 1" Phillips Screws

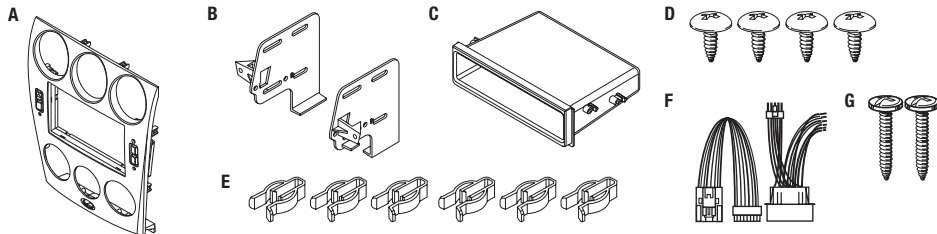

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • Included with kit

Antenna Adapter: • Not Required

TOOLS REQUIRED

- Small Flat Blade Screwdriver • Phillips Screwdriver
- Socket Wrench


CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

NOTE: Refer to the instructions included with the aftermarket radio.


Dash Disassembly

Electronic Climate Control


1. Unscrew the shift knob counter clockwise to remove. (Figure A)
2. Unclip and remove the cup holder/ parking brake cover and shifter cover as one unit. (Figure B)
3. Remove (2) Phillips screws from the bottom of the radio/climate control panel. (Figure C)
4. Open glove box, squeeze sides together and let open fully then remove (1) 10 mm bolt from the side of the radio bracket. (Figure D)

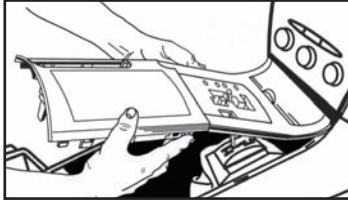


(Figure B)



(Figure C)




(Figure D)

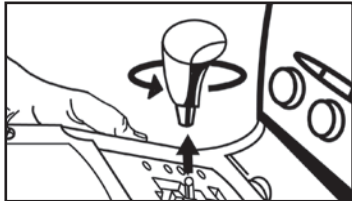


(Figure A)

5. Unsnap and remove radio/climate control panel including climate control vents at the top. (Figure E)
6. Remove (4) Phillips screws securing vents to radio/climate control panel to remove. (Figure E)
7. Remove (8) Phillips screws securing the electronic climate control to the radio/climate control panel to remove. (Figure F)
8. Remove (4) Phillips screws securing the radio display harness bracket to the radio chassis then unclip and remove the radio display harness. (Figure H)


Continue to kit assembly




(Figure E)

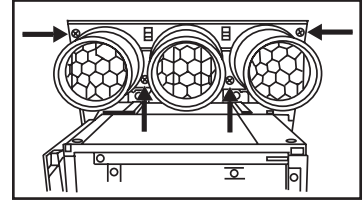

(Figure F)

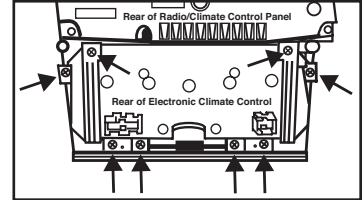

(Figure G)

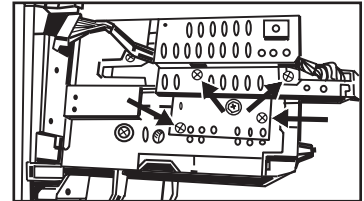


(Figure H)


Dash Disassembly

Manual Climate Control


1. Unscrew the shift knob counter clockwise to remove. (Figure A)
2. Unclip and remove the cup holder/parking brake cover and shifter cover as one unit. (Figure B)
3. Remove (2) Phillips screws from the bottom of the radio/climate control panel. (Figure C)
4. Pull the climate control knobs off and remove (2) Phillips screws from behind knobs. (Figure D)

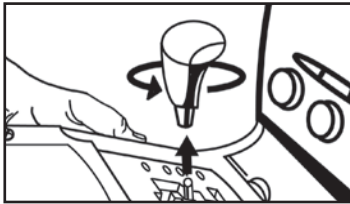


(Figure A)

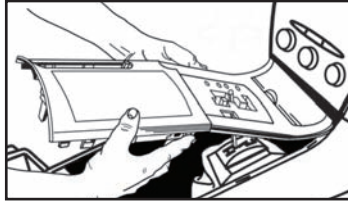

(Figure B)



(Figure C)




(Figure D)


5. Open glove box, squeeze sides together and let open fully then remove (1) 10 mm bolt from the side of the radio bracket. (Figure E)
6. Unsnap and remove radio/climate control panel including climate control vents at the top. (Figure F)
7. Remove (4) Phillips screws securing vents to radio/climate control panel to remove. (Figure G)



(Figure E)

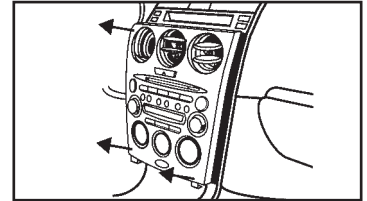

(Figure F)

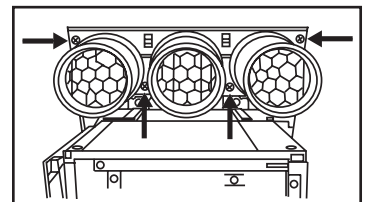


(Figure G)


Dash Disassembly

Manual Climate Control (cont.)

8. Remove the (2) small Phillips screws securing the light bulb boards on each side of the backlight dispersion bar. **Note: Notice how they are positioned in the backlight dispersion bar as they will be placed in the 99-7524B the same way.** (Figure H)
9. Remove (4) Phillips screws securing backlight dispersion bar and knob trim bezels. (Figure I)




(Figure H)




(Figure I)

10. Push the bottom edges of the knob trim bezels from the front side to the back and slide both pieces out as one unit. (Figure J)
11. Remove (4) Phillips screws securing the radio display harness bracket to the radio chassis then unclip and remove the radio display harness. (Figure K)

Continue to kit assembly

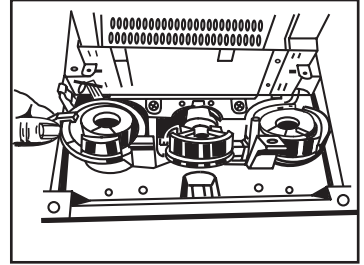

(Figure J)

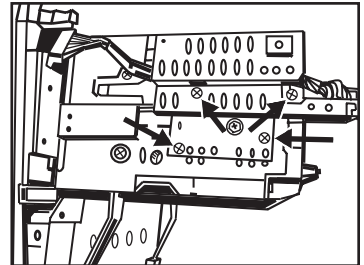

(Figure K)




99-7524B


Kit Assembly

Electronic Climate Control

1. Clip the climate control knob outer trim ring panel into the 99-7524B housing. (Figure A)
2. Align the screw holes in the climate control and the radio housing panel then push the climate control onto the radio housing panel. (Figure B)




(Figure A)

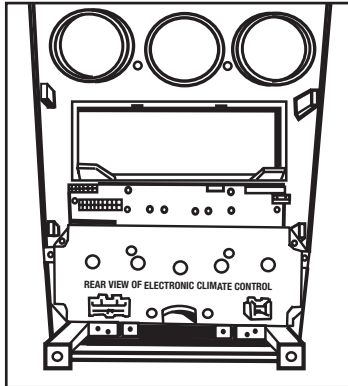


(Figure B)

3. Secure the climate control with the factory hardware removed in step 7 of the dash disassembly for electronic climate control cars.
4. Unclip and remove the small oval cover plate at the bottom center of the factory radio and insert into the 99-7524B radio housing. (Figure C)

Note: The 16-position to 16-position harness supplied with the 99-7524B will NOT be used in vehicles with electronic climate controls. (Figure D)

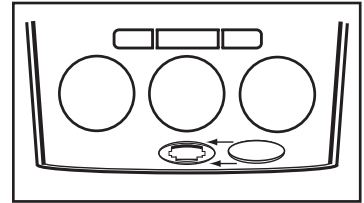

(Figure C)

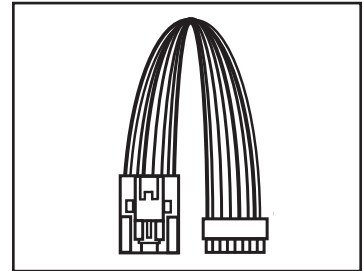


(Figure D)


Kit Assembly

Manual Climate Control:


- Put the climate control knob outer trim panel and the backlight dispersion bar together and clip into the radio housing panel as one unit. **Note: You may have to push down slightly on the middle of the unit to ease in positioning it into the kit.** (Figures A, B, C)
- Secure the unit with the factory hardware removed in step 9 of the manual climate control dash disassembly.

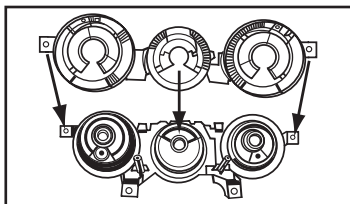

(Figure A)

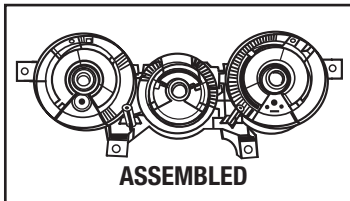


(Figure B)

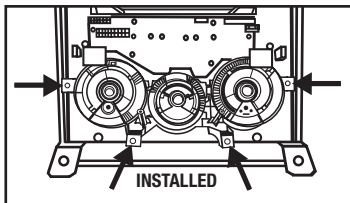


(Figure C)

- Secure the light bulb boards on each side of the backlight dispersion bar using the factory hardware removed in step 8 in manual climate control dash disassembly. (Figure D)
- Unclip and remove the small oval cover plate at the bottom center of the factory radio and insert into the 99-7524B radio housing. (Figure E)


Note: The 16-position to 16-position harness supplied with the 99-7524B WILL be used in vehicles with manual climate controls. (Figure F)

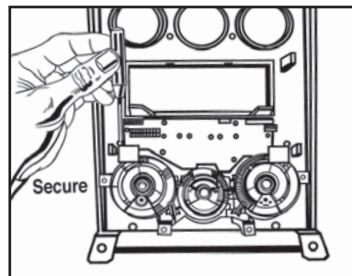

(Figure D)

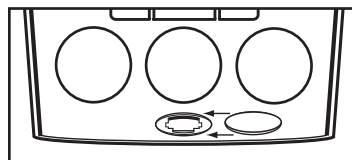

(Figure E)

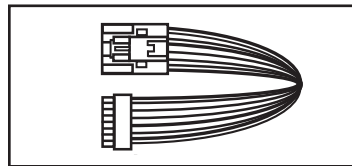

(Figure F)




99-7524B

Kit Assembly

Felt Tape Application

Note: Due to differences in factory tolerances you may need to apply the provided felt tape to the edge of the 99-7524B radio housing to relieve backlight bleed through.

1. Looking at edge of radio housing apply felt tape to inner edge (toward back of kit). If it is positioned too closely to the outer edge you may be able to see it once it is in the dash. (Figure A)
2. Attach the included six panel clips to the radio housing.

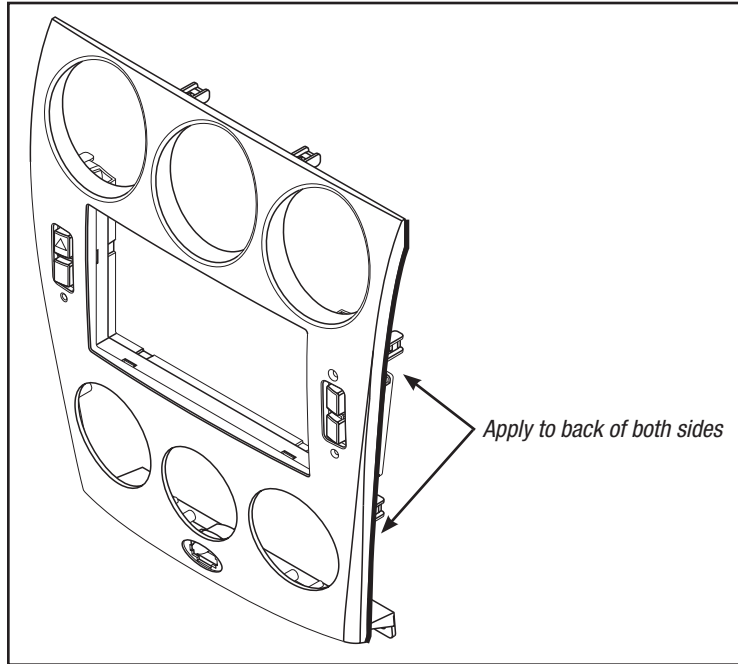


(Figure A)


Kit Assembly

ISO DIN radio provision with pocket

1. Mount the pocket to the radio brackets with the (4) #8 x 3/8" Phillips screws supplied. (Figure A)
2. Slide the radio into the radio brackets/pocket assembly and secure with the screws supplied with the radio. (Figure B)
3. Locate the factory wiring harness and antenna plug in the dash.
4. Mount the new radio assembly into the dash and reassemble dash in reverse order of disassembly.
5. There are no existing holes for the radio mounting. New holes will be made using the included one inch screws. The radio brackets will rest on a shelf in the sub-dash. Be sure the radio is level and centered while mounting the radio/ bracket assembly into the dash opening.




(Figure A)



(Figure B)

DDIN radio provision

1. Attach the Double DIN radio to the radio brackets using the screws supplied with the radio. (Figure A)
2. Locate the factory wiring harness and antenna plug in the dash.
3. Mount the new radio assembly into the dash and reassemble dash in reverse order of disassembly.
4. There are no existing holes for the radio mounting. New holes will be made using the included one inch screws. The radio brackets will rest on a shelf in the sub-dash. Be sure the radio is level and centered while mounting the radio/ bracket assembly into the dash opening.

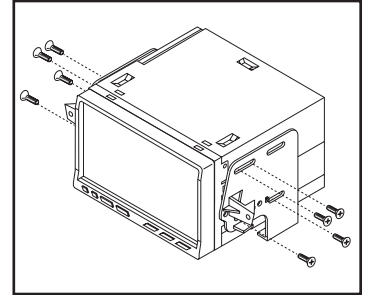

(Figure A)

Kit Assembly

Start the car and test all the climate control functions. **Note: The air recirc light will be on at initial startup and will not go out until using the climate controls for the first time.**

Display Customization:

1. Press and hold the **Clock** button in the factory display until “**Set Text**” is displayed then release button. Settings will begin with the first character location. Use the **Set** button to select the desired character then press the **AMB** button to select the next character location. There are 10 available character locations.
2. Once the desired text is entered if you do not touch any buttons for 10-seconds the display will read “**Saved Text**” and your text will be saved.

3. To set the clock press and hold the **Clock** button until “**Hr. Adjust**” is displayed then use the **Set** button to select the desired hour.
4. Press the **Clock** button again and the display will read “**Min. Adjust**” then use the **Set** button to select the desired minutes.

Note: If equipped with a Dimmer button it will still function as normal.

