

 | **MISHIMOTO**

# INSTALLATION GUIDE

**2015+ VOLKSWAGEN GOLF R (MOB) ALUMINUM PERFORMANCE  
DSG COOLER/HEAT EXCHANGER | SKU: MMRAD-MK7-15A**

## TABLE OF CONTENTS

**Pg 01 RESOURCES & CONTACT INFORMATION**

**Pg 02 PARTS INCLUDED**

**IMPORTANT SAFETY INFORMATION**

**TOOLS NEEDED**

**INSTALLATION TIME**

**INSTALLATION DIFFICULTY**

**INSTALLATION INSTRUCTIONS**

## IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

## INSTALLATION TIME **2 HOURS**

## INSTALLATION DIFFICULTY

## PARTS INCLUDED


RADIATOR  
8MM BOLTS (2X)

## TOOLS NEEDED

T-20 TORX	¼" RATCHET AND EXTENSION
T-25 TORX	PLIERS
8MM SOCKET	DRAIN PAN
13MM SOCKET	

## INSTALLATION INSTRUCTIONS

- 01.** Drain the engine coolant.
- 02.** Remove the stock DSG Cooler / Heat Exchanger from the vehicle.

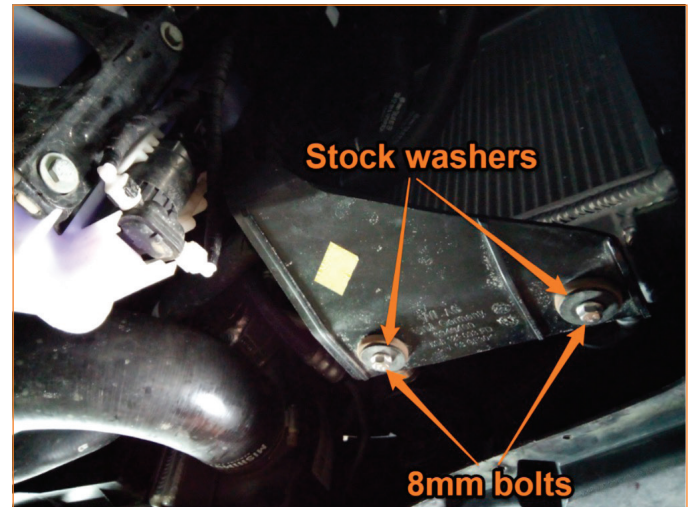

- 03.** Install the Mishimoto DSG Cooler / Heat Exchanger using the stock washers and provided 8mm bolts. (2x 8mm bolts)
- 04.** Refill coolant and bleed the system.

**Congratulations! You have finished your installation.**