

INSTALLATION INSTRUCTIONS 2015+ VOLKSWAGEN GOLF R (MQB) ALUMINUM PERFORMANCE

DSG COOLER/HEAT EXCHANGER | SKU: MMRAD-MK7-15A



TABLE OF CONTENTS

Pg 01 RESOURCES & CONTACT INFORMATION

Pg 02 PARTS INCLUDED

IMPORTANT SAFETY INFORMATION

TOOLS NEEDED

INSTALLATION TIME

INSTALLATION DIFFICULTY

INSTALLATION INSTRUCTIONS

Pg 03 DISPOSAL INSTRUCTIONS

WARRANTY INFORMATION

IMPORTANT SAFETY INFORMATION

- Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- Raise vehicle only on jack stands or on a vehicle lift
- Allow vehicle to cool completely prior to attempting installation
- Do not run the engine or drive the vehicle while overheating; serious damage can occur
- Please dispose of any liquids properly
- Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products

INSTALLATION TIME **2 HOURS**

INSTALLATION DIFFICULTY

PARTS INCLUDED


RADIATOR
8MM BOLTS (2X)

TOOLS NEEDED

T-20 TORX	¼" RATCHET AND EXTENSION
T-25 TORX	PLIERS
8MM SOCKET	DRAIN PAN
13MM SOCKET	

INSTALLATION INSTRUCTIONS

01. Drain the engine coolant.
02. Remove the stock DSG Cooler / Heat Exchanger from the vehicle.

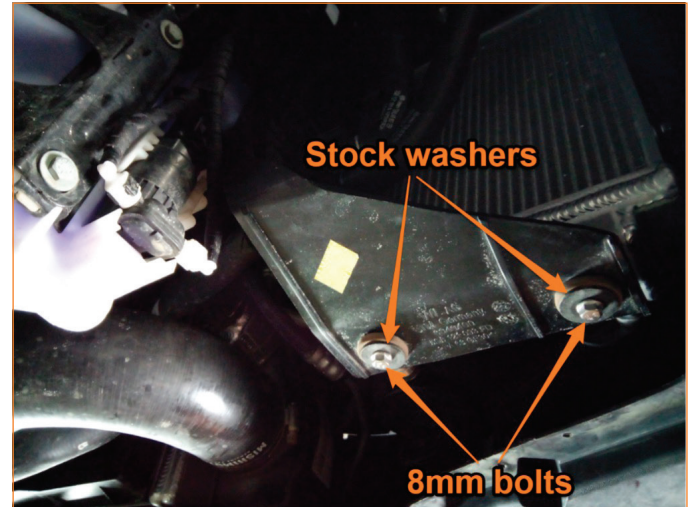

03. Install the Mishimoto DSG Cooler / Heat Exchanger using the stock washers and provided 8mm bolts. (2x 8mm bolts)
04. Refill coolant and bleed the system.

Congratulations! You have finished your installation.