



Step 1: Locate Coolant Tank



Step 2: Remove Siphon Hose from Coolant Tank



Step 3: Release hold down tab and twist tank to remove from mount



Step 4: Remove Coolant Tank from vehicle




Step 5: Place New Coolant Tank into vehicle





Step 6: Insert lower mount into bracket (on bottom of coolant tank)

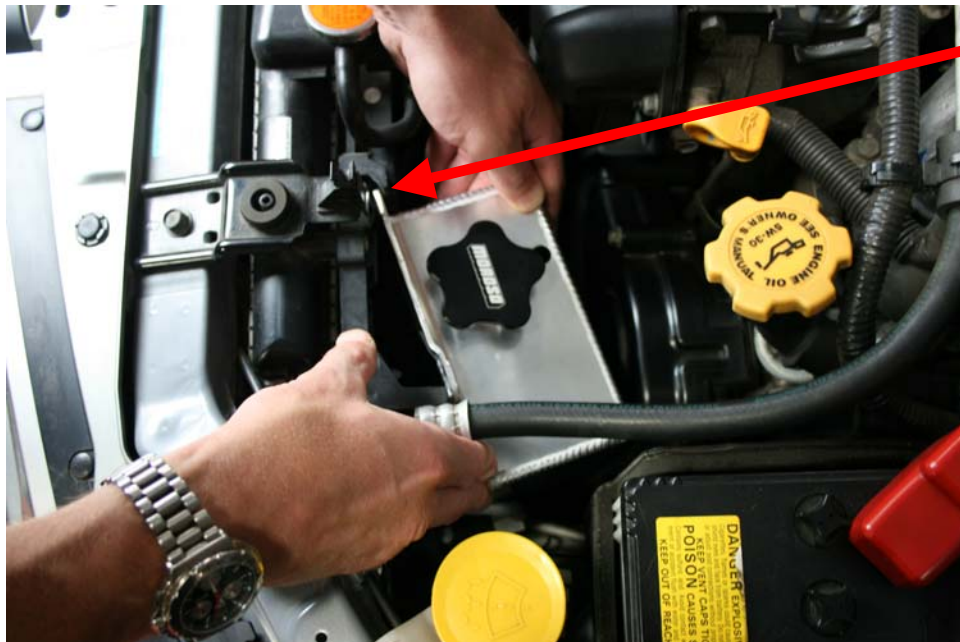

Step 7: Rotate coolant tank into upper mount



Step 8: Snap coolant Tank into hold down tab




Step 9: Remove fill cap



Step 10: Insert siphon tube into coolant tank



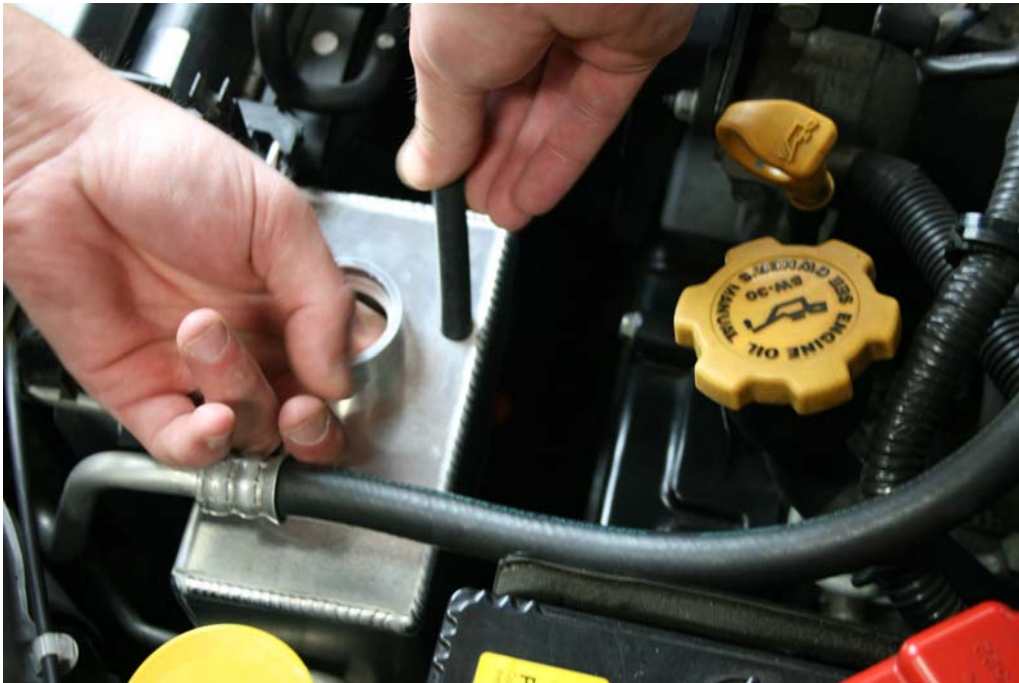

Step 11: Thread tube into coolant tank



Step 12: Refill with 45 ounces of coolant



Step 13: Reinstall fill cap. Installation is complete

