



INSTALLATION INSTRUCTIONS

Street Fire Blaster GM Dual Connector Coil PN 5526

ONLINE PRODUCT REGISTRATION: Register your MSD product online. Registering your product will help if there is ever a warranty issue with your product and helps the MSD R&D team create new products that you ask for!

IMPORTANT: Read instructions before attempting the installation.

Parts Included:


1 - Street Fire GM Dual Connector Coil

1 - Parts Bag

WARNING: During installation, disconnect the battery cables. When disconnecting the battery, always remove the Negative cable first and install it last.

The Street Fire GM Dual Connector Coil is designed to produce increased voltage and energy over the stock GM Coil. To improve your vehicle's ignition, try a set of Street Fire Spark Plug wires!

1. Disconnect the stock coil connectors and the spark plug wire.
2. Remove the factory coil. It may be necessary to remove the factory coil bracket to drill the rivets out to remove the stock coil.
3. Install the Street Fire GM Coil and mount it with the supplied hardware.
4. Plug in the wiring connectors and the coil wire.

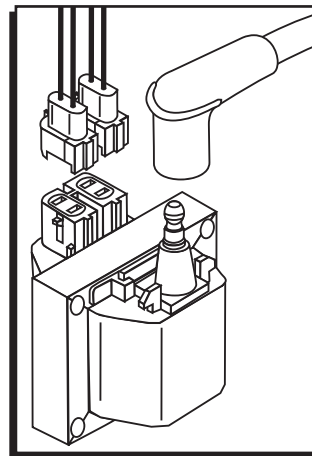

**Figure 1 Installing the
Street Fire GM Dual
Connector Coil.**