

MSD INSTALLATION INSTRUCTIONS

MSD Pro Mag 12 LT PN 7904

Parts Included:

- 1 - Pro Mag LT
- 1 - Band Clamp

1. Locate which cap terminal is going to be the number one cylinder. Mark on the housing this location then remove the cap (Figure 1).
2. Loosen the band clamp and position the generator so the rotor tip is just leading into the number one cylinder mark indicating the number one cylinder (Figure 2). This will put the timing approximately 2°-3° within TDC or where you have the timing set. **Note:** Always verify timing with a timing light.
3. Install the cap and spark plug wires.

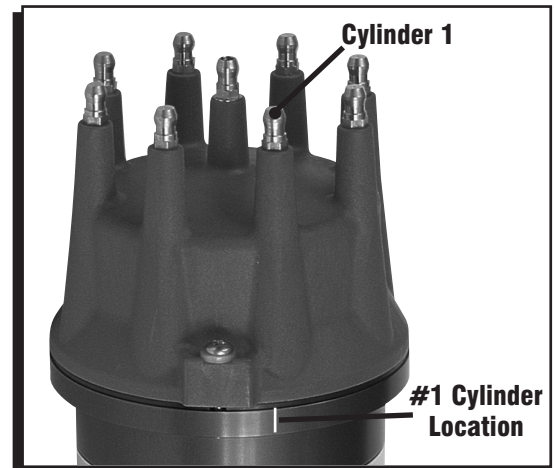


Figure 1 Marking the Number One Location.

Maintenance Parts		
Cap/Rotor	-	PN 7919 Red / PN 79193 Black
Kill Switch	-	PN 8111
Band Clamp	-	PN 8148



Figure 2 Positioning the Rotor Tip.

MSD INSTALLATION INSTRUCTIONS

WIRING

Figure 3 show the wiring of the Pro Mag system.

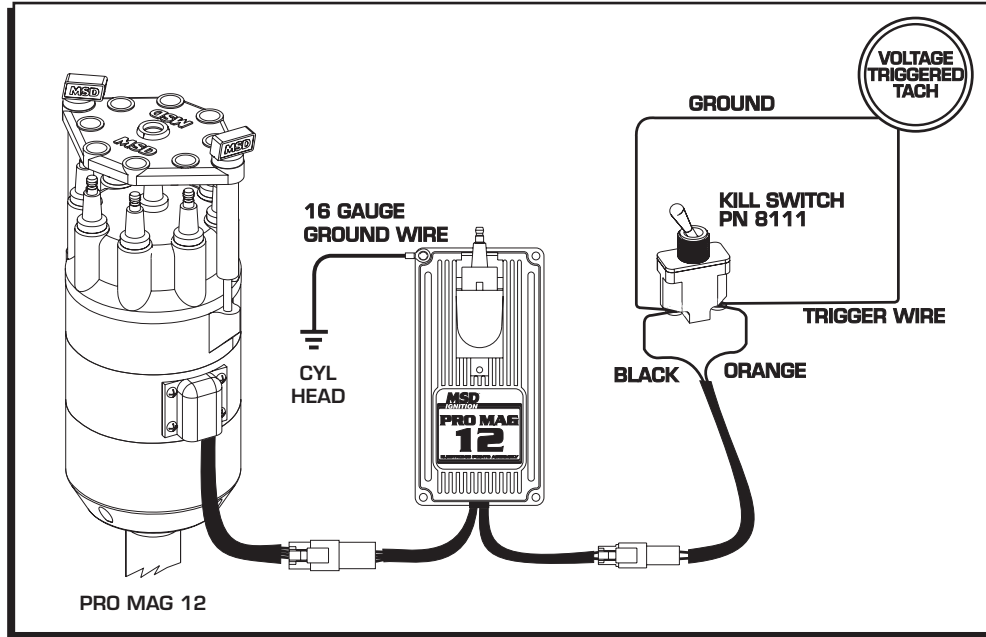


Figure 3 Wiring the Pro Mag 12 LT.