



PACKAGE COMPONENTS


TENT




TENT BAG




TENT TIE STRAPS (2)




TENT POLE (1)



POLE BAG



STAKES (2)



STAKE BAG



WARNING

- Keep all flame and heat sources away from the tent fabric. The tent is made with flame-resistant fabric which meets CPAI-84 specifications. This does not make it fireproof. The fabric will burn if left in contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistant properties ineffective.
- To prevent carbon monoxide from entering the vehicle and tent area, do not run the engine, do not cook inside the tent, and do not use a gas heater in the tent. Carbon monoxide is dangerous to your health.
- Engine must be off and exhaust must be fully cooled before tent installation and use.

CAUTION


- Do not use candles, matches or open flames of any kind in or near the tent
- Do not cook inside the tent
- Build campfires downwind and several meters away from the tent. Be sure to fully extinguish fires before leaving a campsite or before retiring for the night
- Exercise extreme caution when using fuel-powered lanterns or heaters inside or around the tent. Use battery-operated lanterns whenever possible
- Do not refuel lamps, heaters or stoves inside the tent
- Extinguish or turn off all lanterns before going to sleep
- Do not smoke inside the tent
- Do not store flammable liquids inside a tent
- NEVER run the vehicle engine when the tent is attached
- Do not install the tent when the temperature is below 0°C/32°F or when your vehicle is wet, it may cause damage
- Allow adequate ventilation inside the tent at all times
- Do not attempt to drive the vehicle with the tent attached

CAMPSITE SELECTION

- Select a smooth level campsite clear of rocks, branches and other hard or sharp objects
- Park the vehicle in the chosen campsite. Turn off the engine and apply the parking brake

TENT SETUP

1. Remove the tent from the tent bag, unroll the tent and lay it flat on the ground.
2. Locate the "Vehicle Side" and place it face up, towards the vehicle.
3. Assemble the tent pole by unfolding each section.

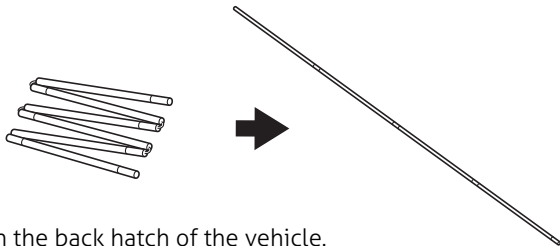


4. Open the back hatch of the vehicle.


NOTE: Ensure the vehicle lights are turned off to prevent battery drainage.

ATTACHING TO YOUR VEHICLE


5. Slide the vehicle sleeve over the vehicle hatch.

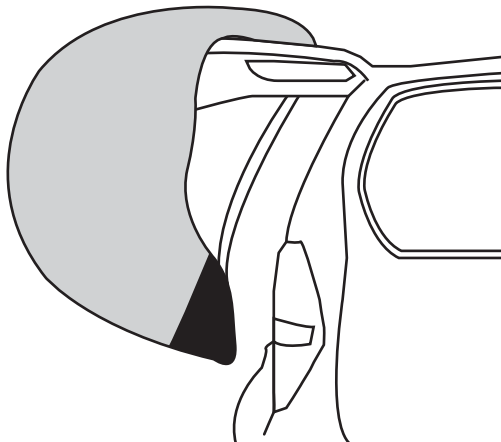


6. Insert the corners of the hatch into the top inside pockets of the tent.

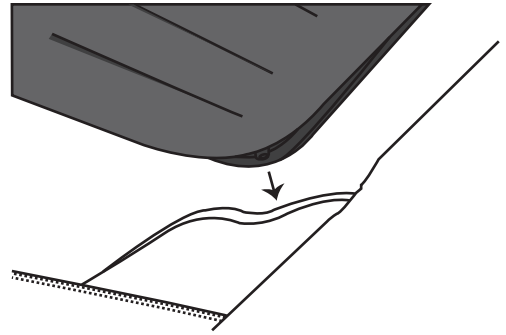


7. Wrap the bottom portion of the tent under and around the vehicle bumper.

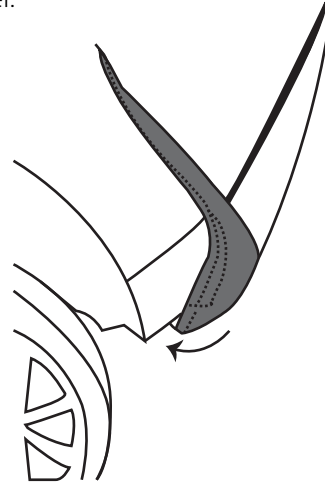

8. A. Hook the bottom outside strap to any part of the wheel well and tighten the strap. Repeat on the other side

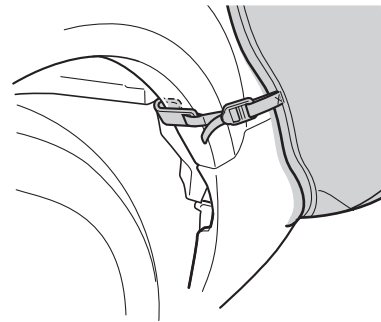

- B. Locate the side strap and attach the male and female clips together. Tighten the strap and repeat on the other side

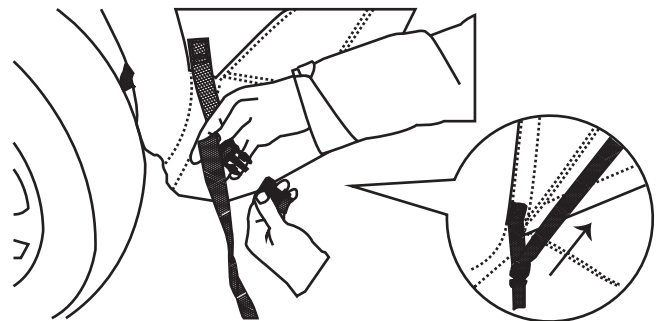


- C. Ensure the exhaust pipe is outside of the sleeve


WARNING: Carbon Monoxide gas is dangerous and can cause unconsciousness or death. Never start or run the vehicle's engine when the tent is attached to the vehicle.

9. Attach the vehicle roof straps.


A. WITH A ROOF RACK, remove the long strap from the female clip. Attach the 2 short straps around the roof rack. Repeat on the opposite side and tighten the straps to secure the tent

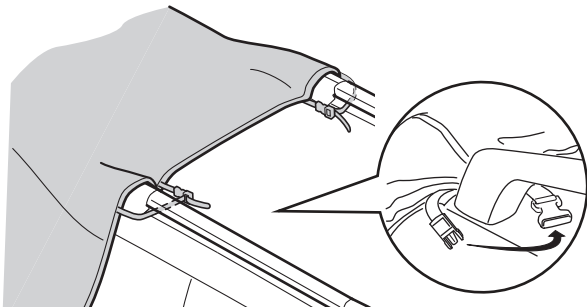


B. WITHOUT A ROOF RACK, extend the long straps to the front of the vehicle. Open the vehicle hood and attach the hooks to the hood hinge, frame or windshield wipers. Tighten the straps to secure the tent

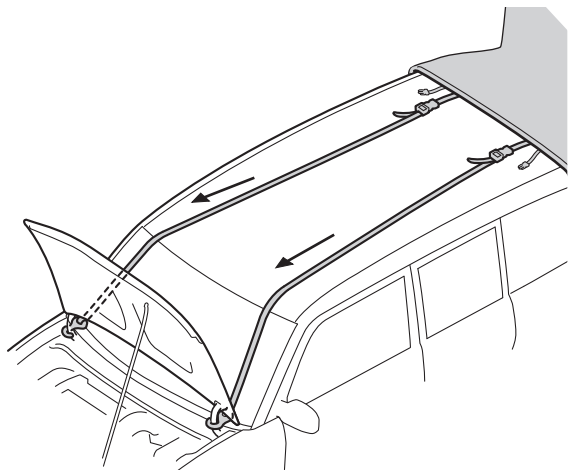

C. From inside the tent, attach the center hook to the tailgate latch. Tighten the strap if necessary

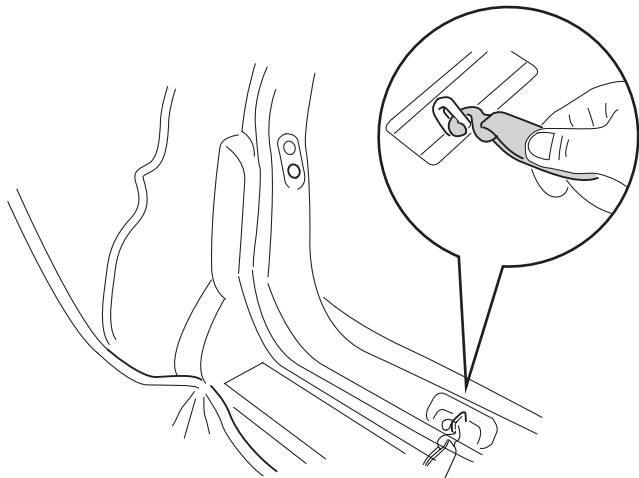


10. Insert the pole into the pole sleeve located on the top inside portion of the tent.

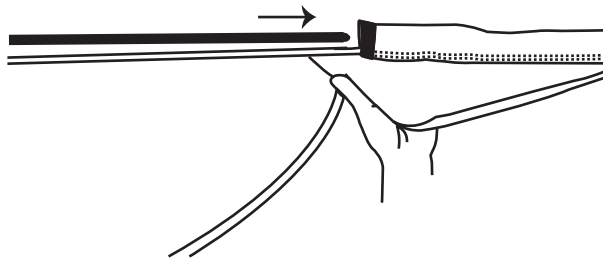


NOTE: Ensure the vehicle hatch is lifted completely before inserting the pole into the pockets.

A. Insert the pole into the pole pocket located at the bottom driver side corner of the tent

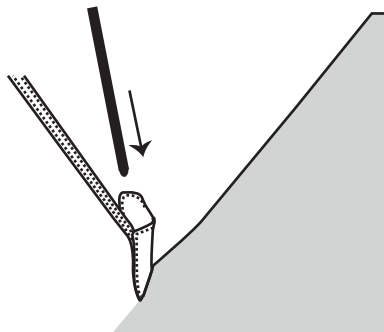

B. Open the black velcro pocket at the bottom passenger side corner of the tent and insert the pole. Secure the velcro closure

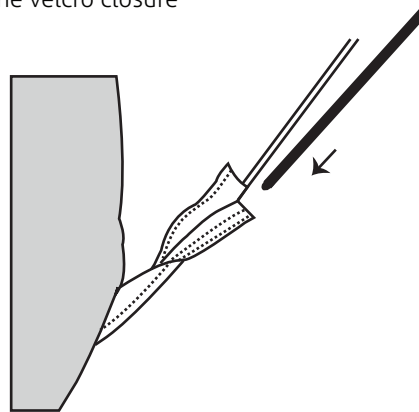

11. Secure the pole with the velcro tabs inside the awning.

12. Stake out the two guide ropes and secure with the pegs.

