


INSTALLATION INSTRUCTIONS

FORM-FIT™ FOR ALL VEHICLES

CUSHION


1

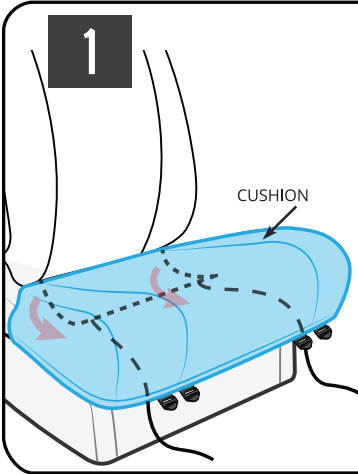

Place the cushion cover on your seat and tuck the side fabric of cushion cover behind the plastic trim of your seats.

CUSHION


2

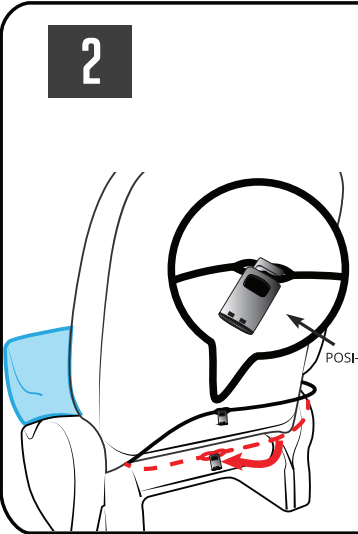

Bring the two ends of drawstring around to the back and pass them through our Posi-Grip cord lock and tighten.


POSI-GRIP

3

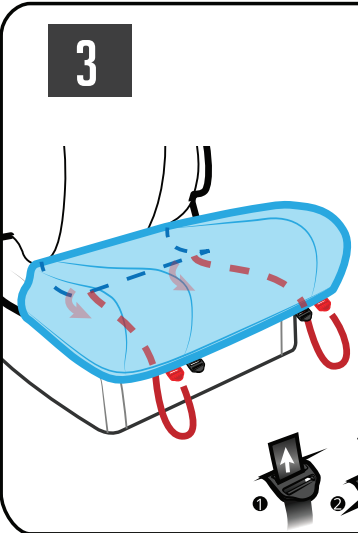


Take the webbing straps near cord lock and insert them into the buckles at the front edge of the seat cover and tighten.

CORD-LOCK




BACKREST

1

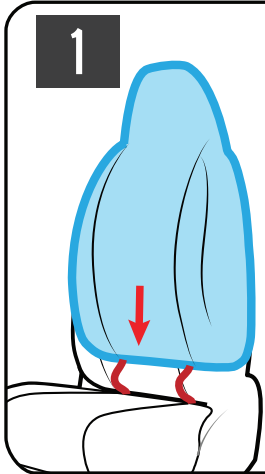

Slip backrest cover on and push fabric through from front to back and pull the outside fabric through the airbag flaps.

2

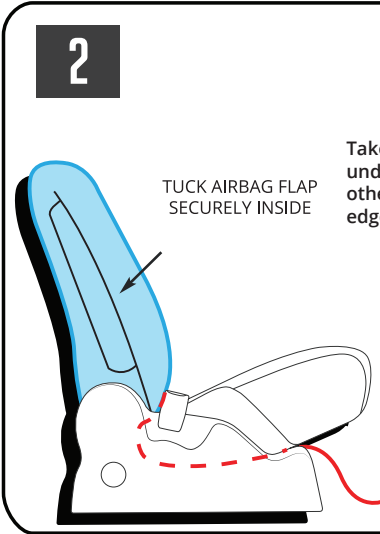


TUCK AIRBAG FLAP SECURELY INSIDE

Take the webbing straps and pull them under the seat and insert into the other seat of buckles sewn to the front edge of the cushion and tighten.

TIP FOR BETTER FIT:
While tightening straps/velcro, push downward on the frontside of the cushion.

3

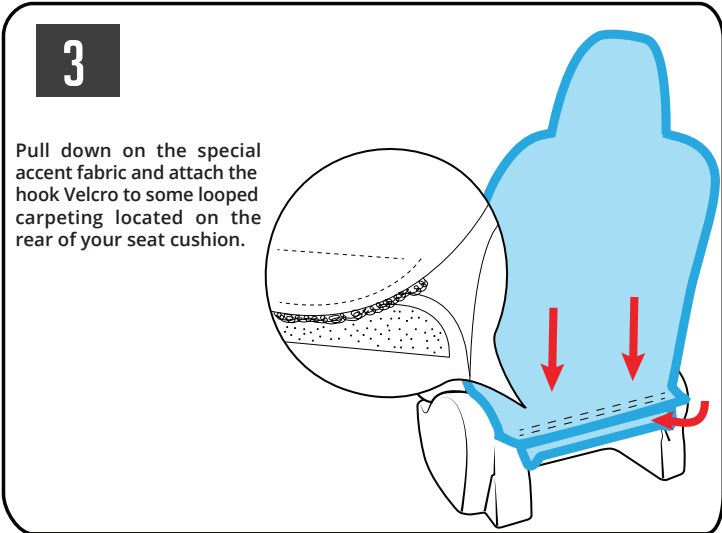

Pull down on the special accent fabric and attach the hook Velcro to some looped carpeting located on the rear of your seat cushion.