



WIPER MOTOR KIT INSTALLATION INSTRUCTIONS

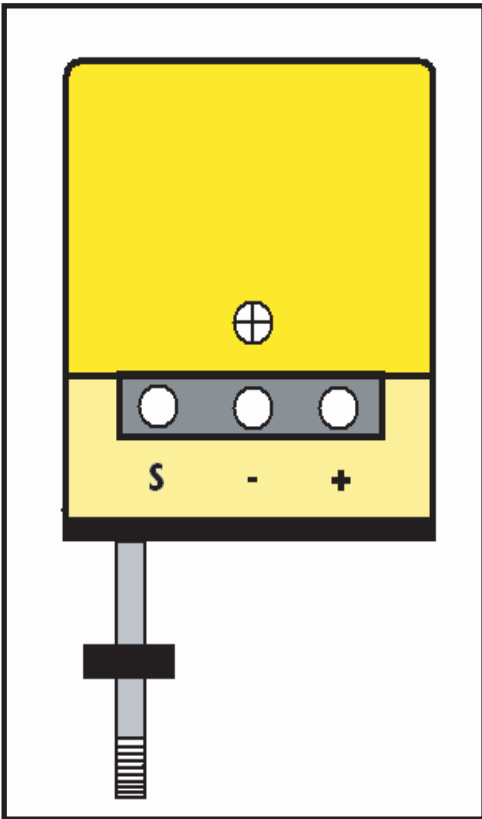

19101.03 (12V-ST) 12 Volt Stainless Steel
19101.02 (12V) 12 Volt Kit - Black
19101.04 (24V) 24 Volt Kit – Black

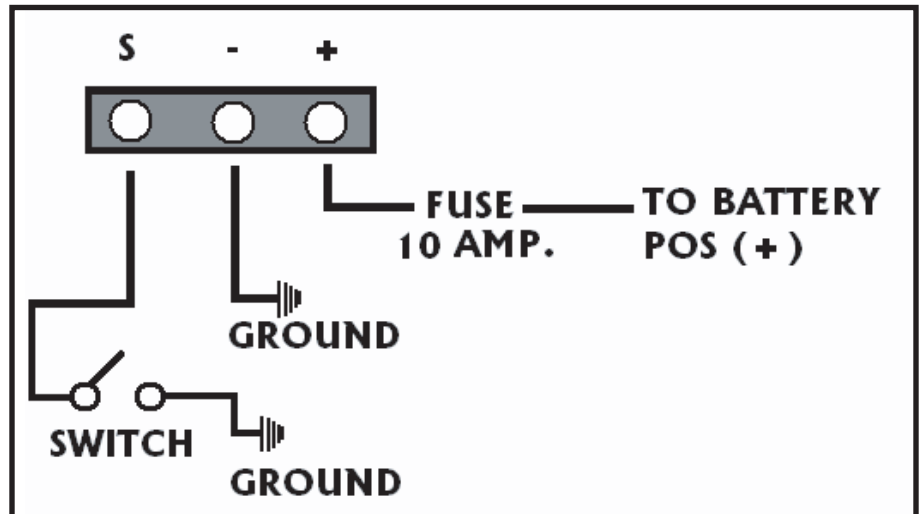

Installation Notes:

The (S) terminal should be connected to one side of the control switch. The other lead wire from the switch will need to be grounded.

The (–) terminal should be connected to a good ground on the vehicle chassis or to the battery's negative terminal.

The (+) terminal should be connected to the original fused wiper motor wire or fused battery positive wire. Use a 10 amp fuse if a new wire assemble is to be used.