

ORACLE®

JEEP WRANGLER SURFACE MOUNT HALO INSTALL GUIDE



MOUNTING THE HALOS:

1) Begin by loosening the headlight and then fishing the Halo wire into the engine bay




- NO BAKING
- NO CUTTING
- NO OVEN



PREP YOUR HEADLIGHTS:

2) PREP YOUR HEADLIGHTS WITH AN ALCOHOL SWAB TO CLEAR OFF ANY DIRT OR DEBRIS ON YOUR LENSES

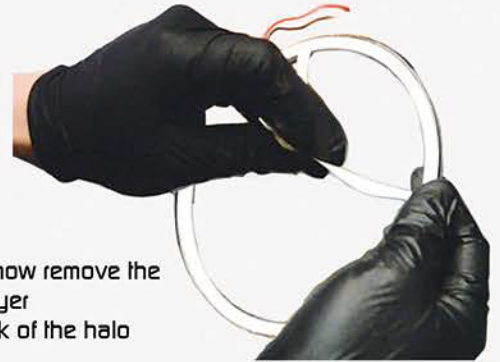

3) You can now remove the top paper layer from the back of the halo

Do not remove the 3M adhesive underneath the paper layer



OPTIONAL: USE A 3M ADHESION PROMOTER AFTER APPLYING THE ALCOHOL SWAB

THIS HELPS BOND THE TAPE TO THE HEADLIGHTS



4) Firmly mount the halo into place and press until a solid bond has formed between the Halo & the light

WIRING TO YOUR JEEP

ALMOST DONE!

Option #1 - Connect to the parking lights. This is great if you have white or amber halos that you want to turn on and off by using the factory headlight switch. Halos will stay on with the headlights.

Option #2- Wireless Controller.

Option #3- Toggle Switch.

5) Connect your Halos to their LED drivers and then mount your drivers into a safe space with either double stick tape or zip-ties

ENJOY YOUR NEW WATERPROOF HALOS FROM ORACLE!



FOLLOW US ON SOCIAL MEDIA FOR MORE TIPS + NEWS

Oracle Lighting provides the best in accessory lighting equipment.