

LED STROBE LIGHTHEAD

Wire Connections :

- Red: Positive
- Black: Negative
- Yellow: Switchover/sync model
- Green: Asynchro Control



Sync Model :

- Connect the Red & Black wire to the power
- Connect each yellow wire into one
- Hold yellow wire to red wire initially for 5 seconds, then start sync model
- Connect the yellow wire to positive for 1 second and remove then change to another flash model and all lights are in sync model


Async Model :

- Connect the Red & Black wire to the power
- Connect each green wire into one
- Hold green wire to red wire initially for 5 seconds, then start async model

Flash patterns:

- | | | |
|------------------|-----------------------|-------------------------|
| • Random | • Single-Quad (split) | • Ultra (all) |
| • Single (split) | • Single H/L (split) | • Single-Quad (all) |
| • Double (split) | • Single (all) | • Single H/L (all) |
| • Quad (split) | • Double (all) | • Steady 2 (California) |
| • Quint (split) | • Quad (all) | • Steady 4 (all) |
| • Mega (split) | • Quint (all) | |
| • Ultra (split) | • Mega (all) | |

* **SPLIT=Head1 alternate Head2** * **ALL=all LEDs on**

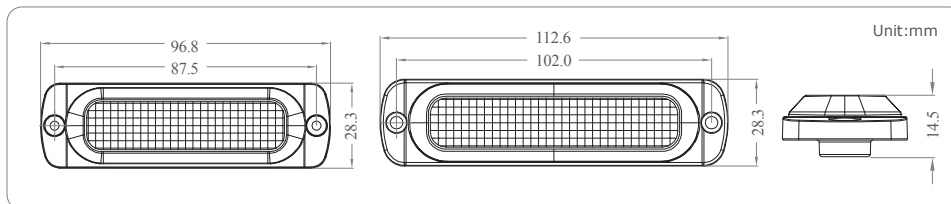

Applications:

