



ORACLE LIGHTING

WRANGLER (JL) REAR BUMPER LED REVERSE LIGHT INSTALLATION

PART#
5874-504

STEP 1:

From under the Jeep, first locate the back side of the reflector housing in the rear bumper.




STEP 2:

To remove the reflector you will need a 7mm socket with a swivel adapter.



STEP 3:

The swivel adapter will help reach the screw which is slightly blocked by the bumper bar.

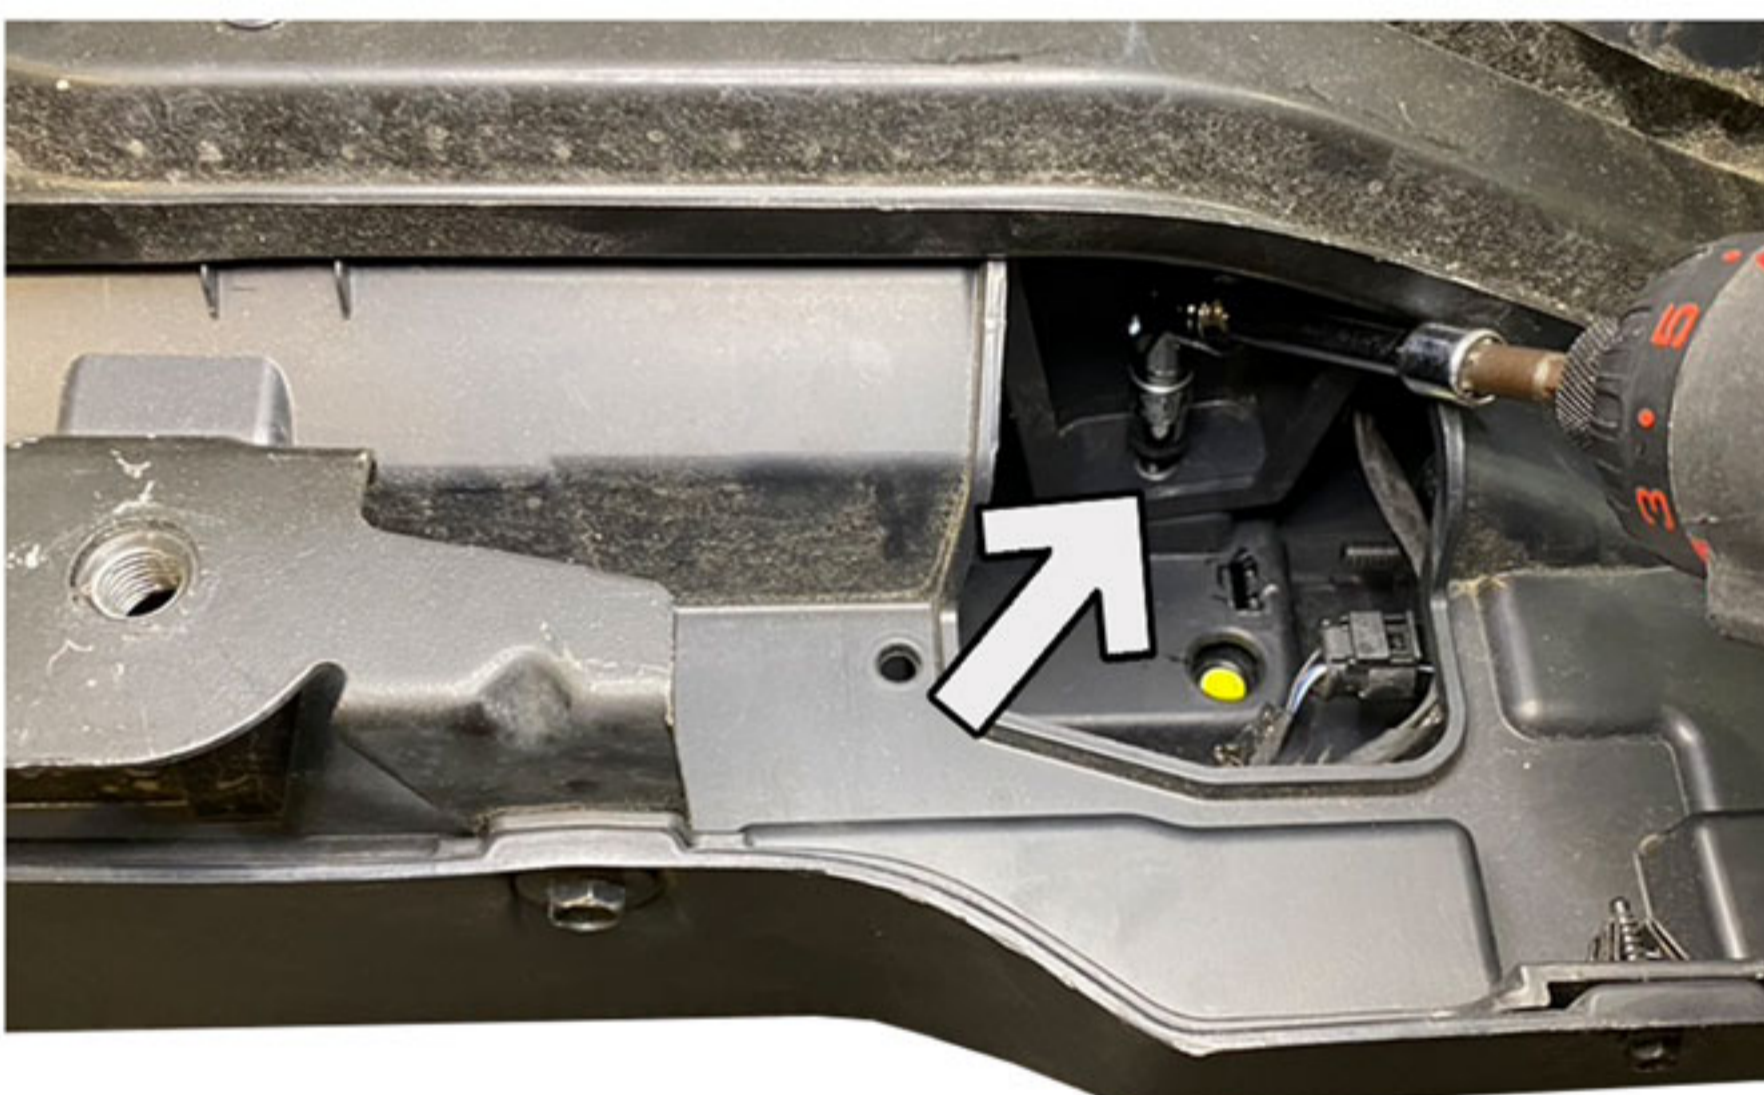

STEP 4:

With the screw removed gently pry the lens from the outer most side of the reflector.



STEP 5:

Locate the round opening and route the cable for the LED lights through this hole.



STEP 6:

Insert the tab on the inner side of the light then snap into place- will require light force.





ORACLE LIGHTING

WRANGLER (JL) REAR BUMPER
LED REVERSE LIGHT INSTALLATION

PART#
5874-504


STEP 7:

Using included hardware, reinstall screw and washer. TIP: Install by hand then tighten.



STEP 8:

Do not over-tighten, doing so may angle the light up rather than down on the road.

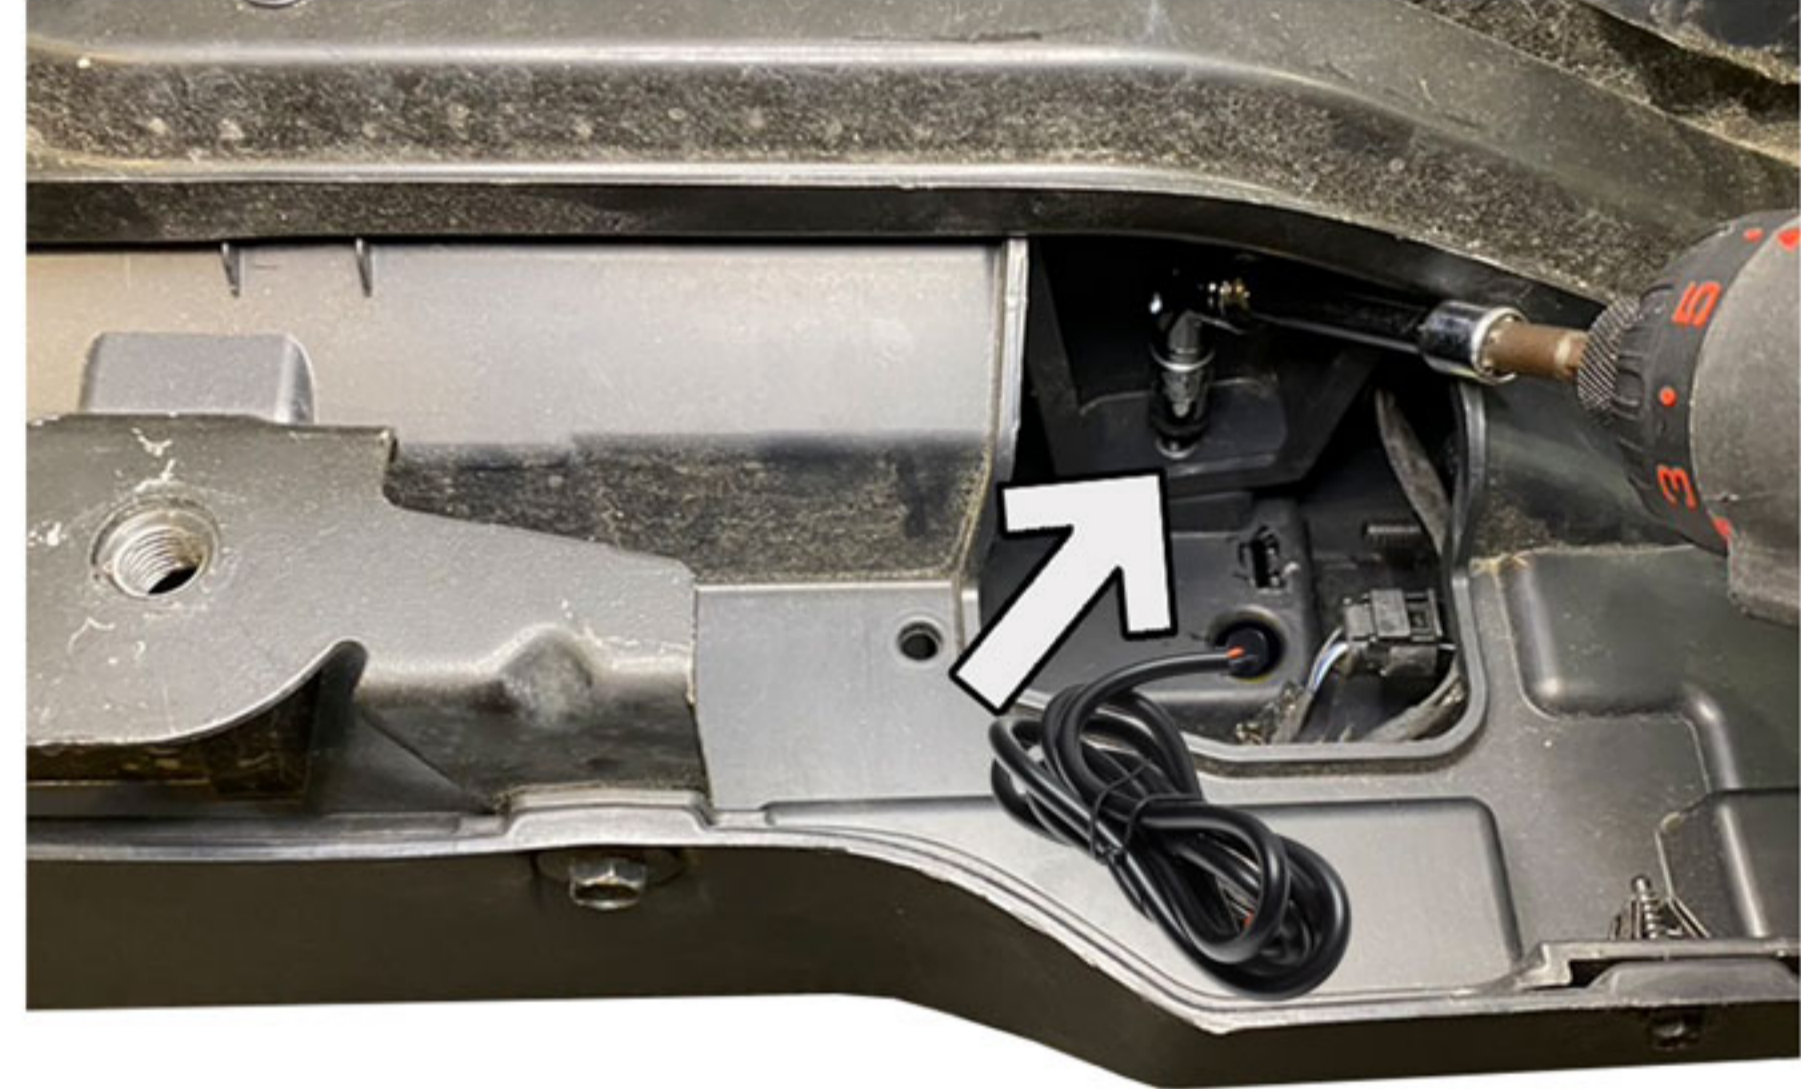


STEP 9:

Remove the factory tail light. In the cargo area pop off cover behind tail light.




STEP 10:

Using a 10mm socket remove plastic bolt and pop tail light off of fender.

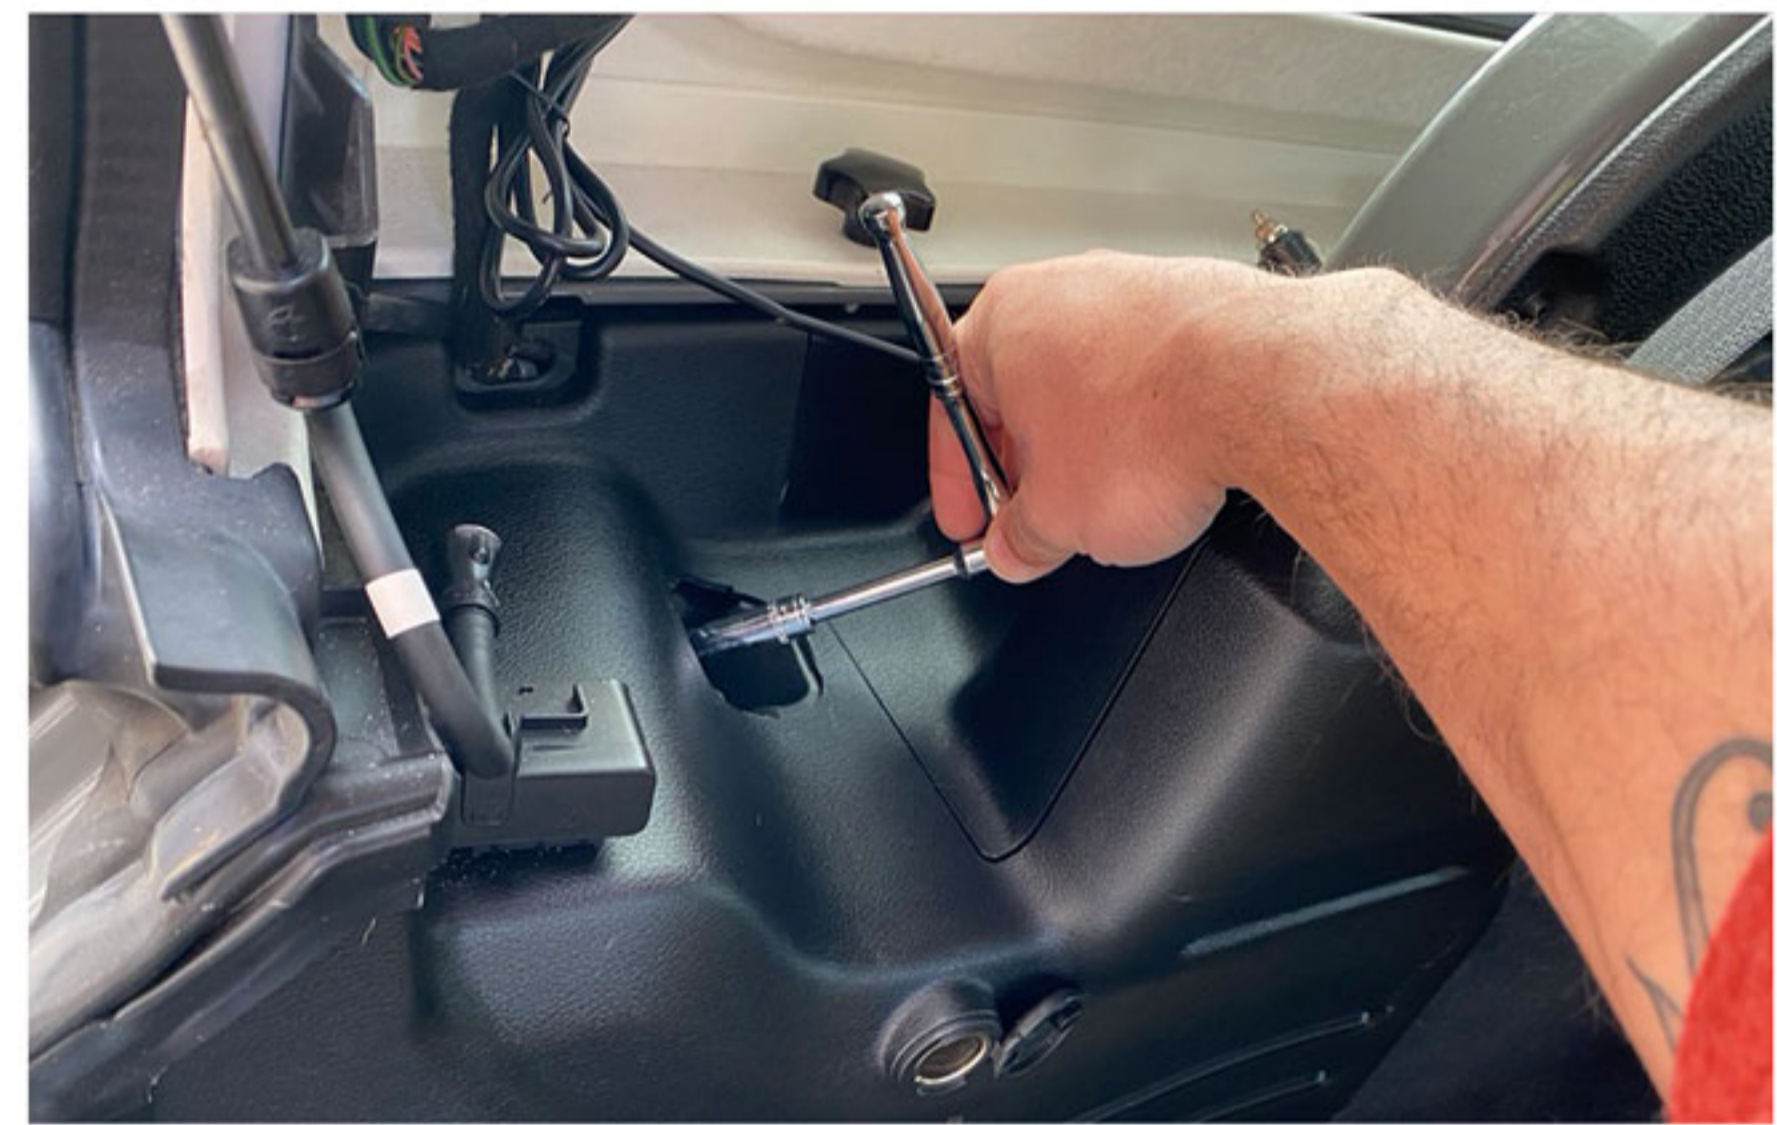

STEP 11:

Attach the included T-Taps to the Orange and Purple (Black) cables.

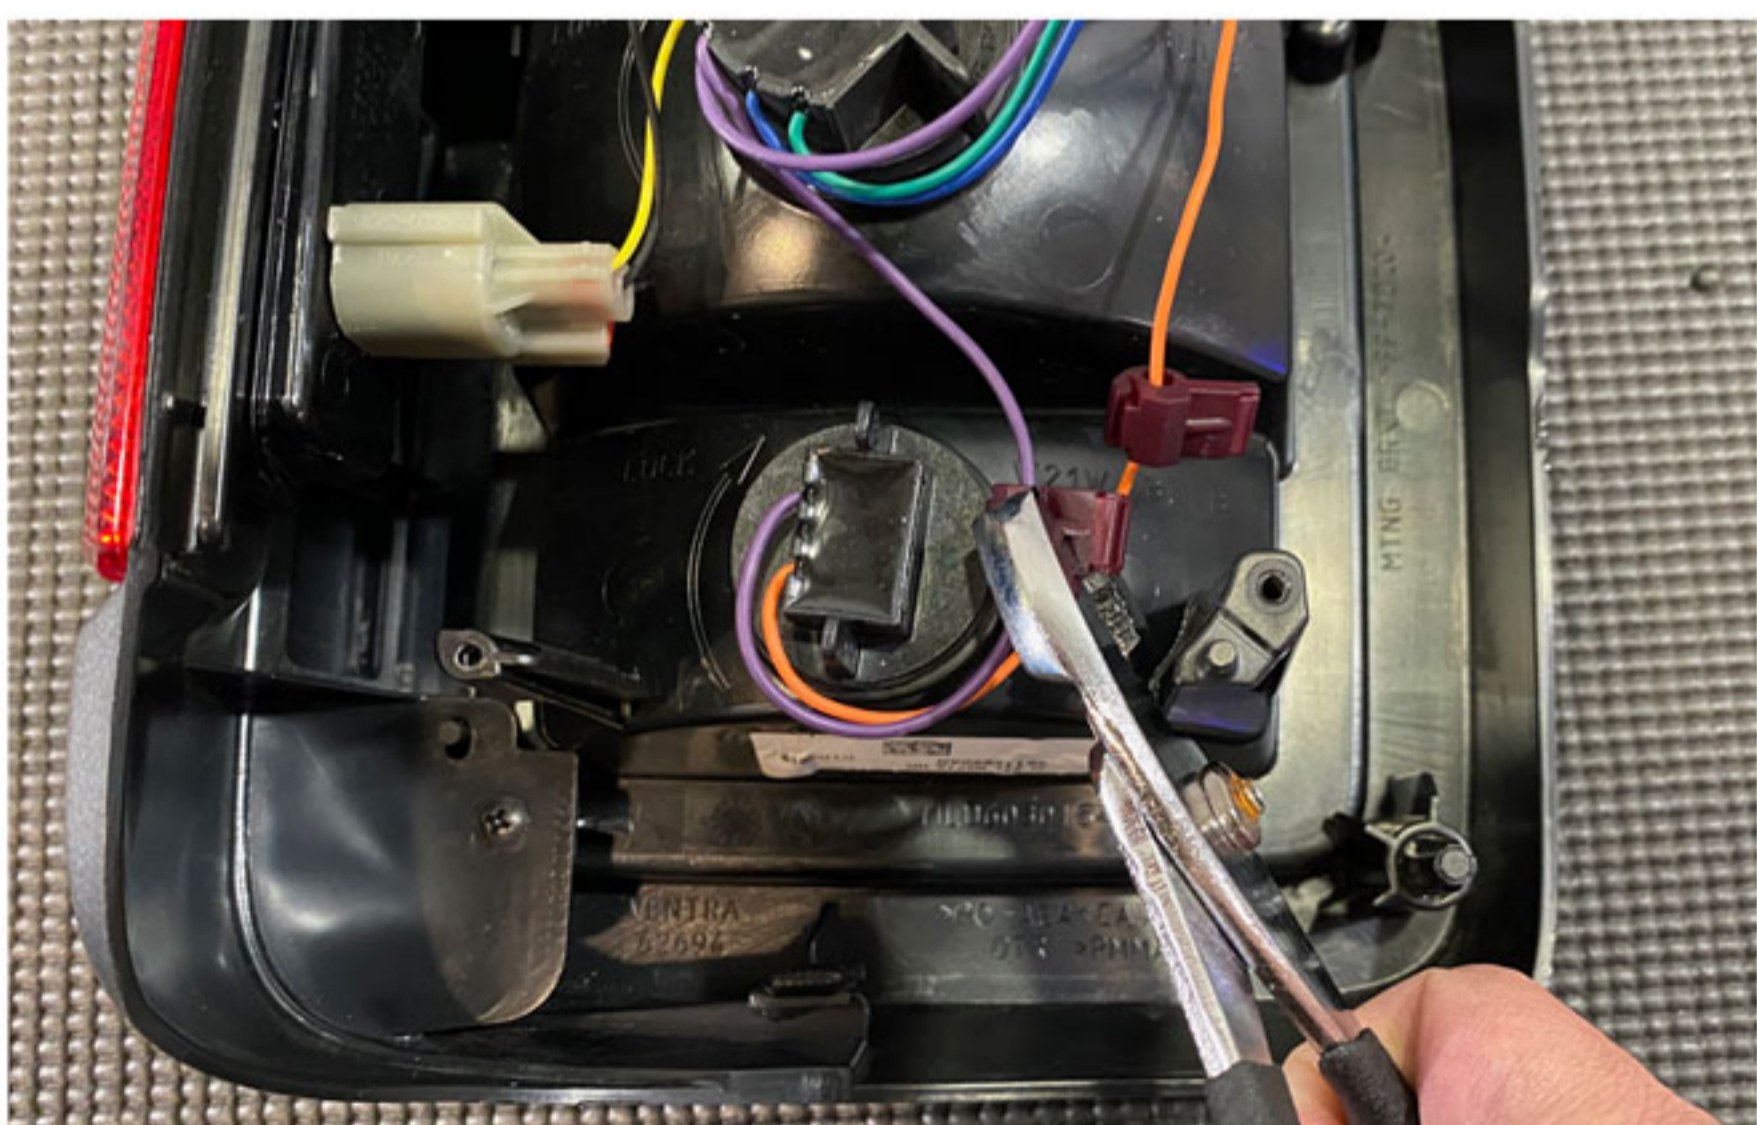

STEP 12:

Connect Black (Ground) wire to the Purple wire and Red Wire (Power) to Orange Wire.

