



# ORACLE LIGHTING

BRONCO ROOF LIGHT BAR  
ORACLE PART #5888-023  
INSTALLATION GUIDE

## TOOLS NEEDED:

10MM SOCKET  
SOCKET WRENCH  
SOCKET EXTENSION

## STEP: 1

WATCH THE VIDEO


SCAN QR OR VISIT:



[WWW.VIMEO.COM/ORACLELIGHTS/BRONCOBARLIGHT](http://WWW.VIMEO.COM/ORACLELIGHTS/BRONCOBARLIGHT)



REMOVE ACCESSORY COVERS TO LOCATE ACCESSORY NUTS. TWO ON DRIVER SIDE/TWO ON PASSENGER SIDE.

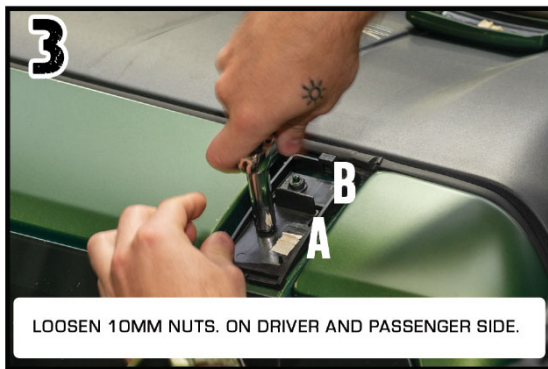

LOOSEN 10MM NUTS. ON DRIVER AND PASSENGER SIDE.



REMOVE THIS PLASTIC PIECE. IT IS NOT NEEDED FOR THE ROOF BAR INSTALL.



RUN LIGHT BAR POWER WIRE UNDER THE HARD TOP AND INTO THE CABIN.



RE-INSTALL FACTORY ACCESSORY NUTS. TORQUE TO SPEC: 60 IN-LB OR 5 FT-LB OF TORQUE.



INSERT INCLUDED CAPS TO COVER ACCESSORY NUTS.



INSTALL NEW WIPER BLADES FOR LIGHT BAR CLEARANCE. CONNECT LIGHT BAR TO AUX SWITCH OR HARNESS.



[www.oraclelights.com](http://www.oraclelights.com)

© 2022 ORACLE LIGHTING

4401 Division St.  
Metairie, LA 70002

FOR ADDITIONAL TECHNICAL SUPPORT PLEASE CALL US 1(800)407-5776