


**Parts List &
Operating Instructions
for:**

7894



Adapter Set

Application: Dodge / Jeep 4WD Upper and Lower Ball Joints


No. 313967
Remover Cup

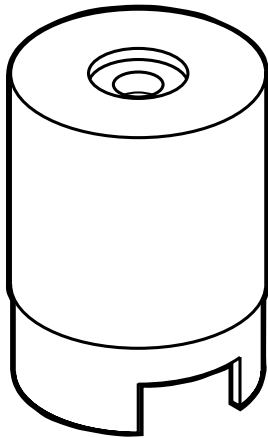

No. 313969
Installer Cup

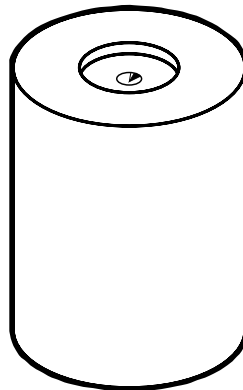

No. 313970
Installer




No. 313968
Remover

Safety Precautions



Caution: To prevent personal injury:




- Wear protective eyewear that meets ANSI Z87.1 and OSHA standards.
- Before performing any repairs on a vehicle, block all wheels to prevent movement.
- Check the final alignment of tooling and components before using a C-frame press to exert pressure.


Parts List & Operating Instructions

Operating Instructions


1. Position the tools as shown to remove or install the upper or lower ball joint. **Note for Installation:** Clean the control arm, and coat the I.D. with a suitable lubricant.
2. Tighten the forcing screw until it meets the cup, and check the alignment of all tooling and components. Continue tightening the forcing screw until the ball joint is removed or installed.

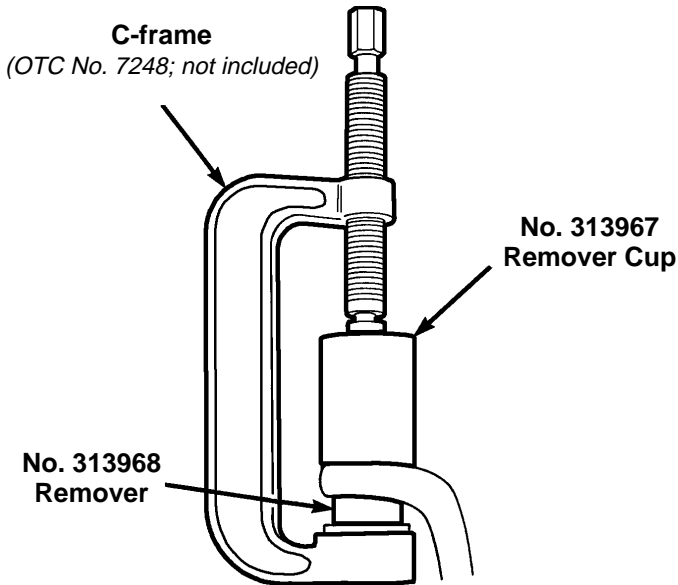


Removing the Upper Ball Joint

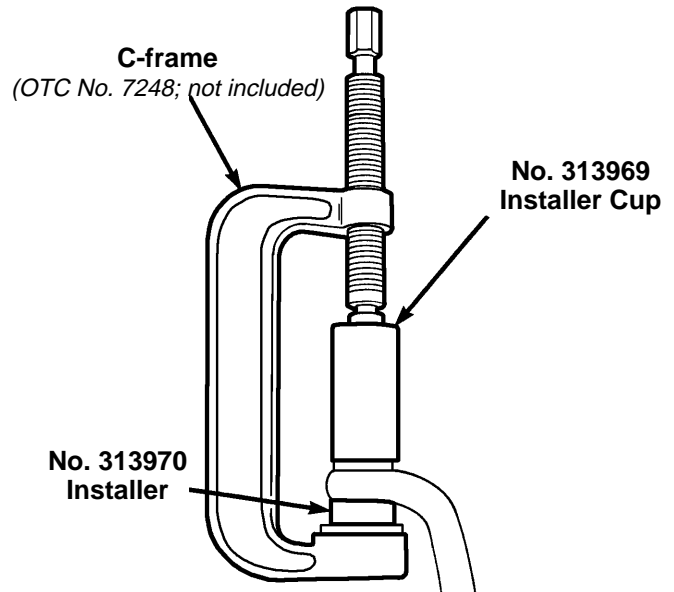

Installing the Upper Ball Joint

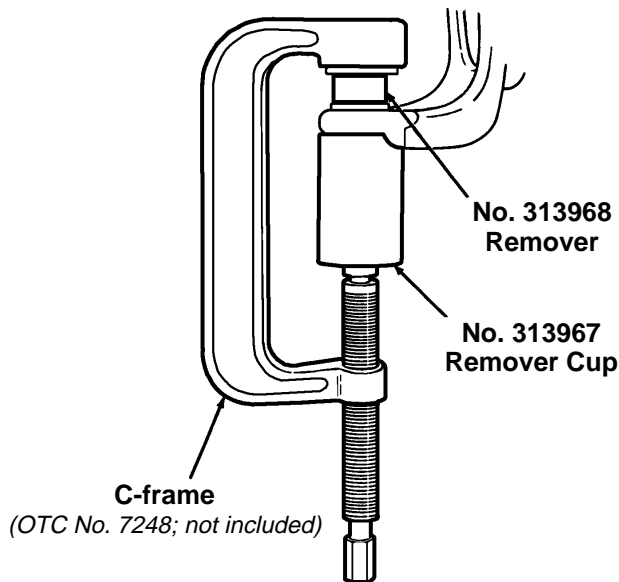

Removing the Lower Ball Joint

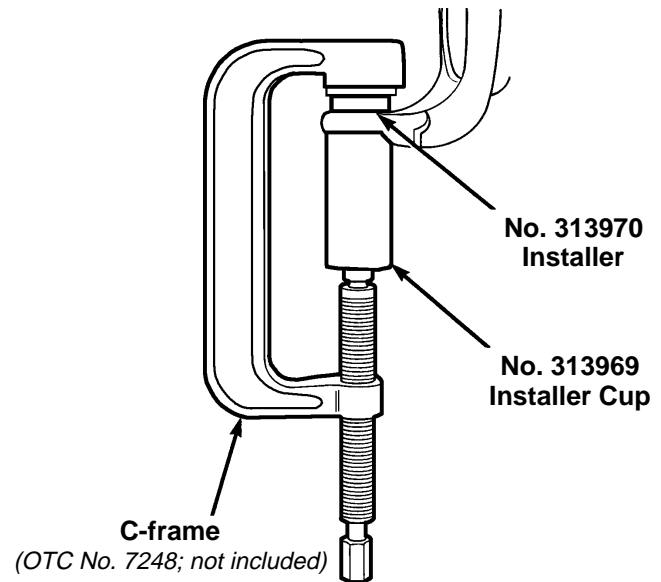

Installing the Lower Ball Joint