




C2R-CHYNA

Radio Replacement interface for 2004+
Chrysler, Dodge and Jeep vehicles
with Factory Radio Models REF, REC, RAQ and RAK.

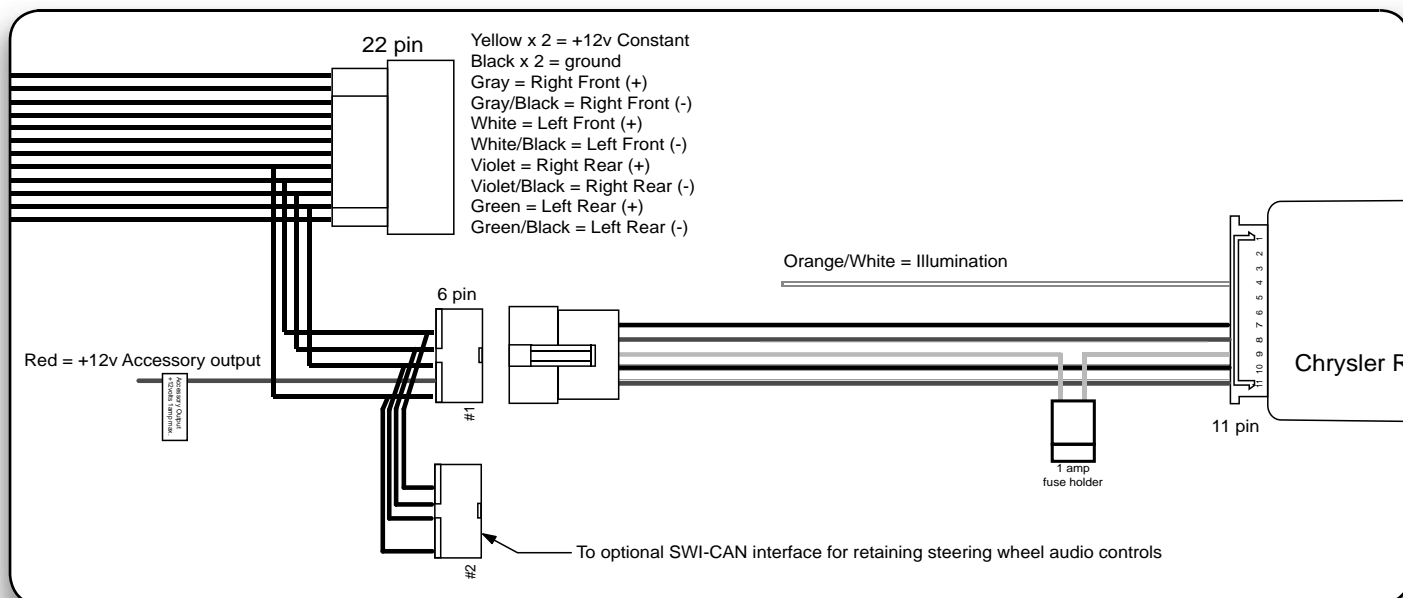

For Use with Aftermarket Radios to Retain Accessory Power

- Retains Accessory Power for Approximately 10 Minutes or Until A Door is Open

Installation:

- 1. Only for Vehicles Without a Factory Amplifier:** Connect the aftermarket radio's front and rear speaker wires to the 22 pin plug.
- 2.** The 22 pin harness has two yellow and two black wires. Connect both yellows to the radio's +12v constant wire and both blacks to the radio's ground wire.
- 3.** The Accessory wire is located on the 6 pin harness - connect this wire to the radio's accessory wire. The accessory wire supplies +12v, 1 amp max, when key is in the Accessory or Ignition position.
- 4. 11 pin plug:** Orange/White - Connect this wire to the radio's Illumination input wire only.
Note: Do not connect these wires to any other circuit besides the radio's wire harness.
- 5.** When all connections are made, connect the 22 pin plug into the vehicle's 22 pin harness.

DISCLAIMER: Under no circumstances shall the manufacturer or the distributors of the C2R-CHYNA parts be held liable for consequential damages sustained in connection with the C2R-CHYNA. The manufacturer and it's distributors will not, nor will they authorize any representative or any other individual to assume obligation or liability in relation to the C2R-CHYNA other than its replacement.