

50202

ROLL BAR MOUNT SWITCH PANEL INSTALLATION INSTRUCTIONS

1. MOUNT THE SWITCH PANEL BOX IN THE DESIRED LOCATION BY DRILLING HOLES IN THE BOX TO SUIT YOUR NEEDS. BOLTS OR HEAVY SCREWS ARE RECOMMENDED OR BY USING HOSE CLAMPS THROUGH THE SLOTS PRE CUT INTO THE REAR PANEL.

NOTE:

THE BOX IS PREPUNCHED TO ALLOW THE SWITCH PANEL WIRES TO EXIT FROM ANY CHOSEN SIDE. THE RUBBER GROMMET INCLUDED IS FOR PROTECTION OF THE WIRES EXITING THE BOX. PLASTIC PLUGS ARE INCLUDED TO CAP REMAINING NON-USED HOLES FOR A PROFESSIONAL LOOK.

- 2. ATTACH THE SWITCH PANEL TO THE BOX WITH SCREWS PROVIDED, ROUTING THE WIRES OUT THE DESIRED HOLE.
- 3. INSERT THE TERMINATED WIRES INTO THE PLASTIC HOUSING PROVIDED ACCORDING TO ILLUSTRATION . SEE ILLUSTRATION ON BACK

THE FOLLOWING INDEX IS A LIST OF WHAT EACH COLOR WIRE IS USED FOR:

RED (12 GA) SWITCH PANEL INPUT

BLACK (12 GA) GROUND

BLUE/YELLOW (14 GA) TO HEADLIGHTS OR DIMMER SWITCH

BLUE (14 GA) TO ELECTRIC WATER PUMP

PINK (14 GA) IGNITION (TO COIL)

PURPLE (14 GA) START (STARTER SOLENOID)

YELLOW/WHITE (14 GA) TO ELECTRIC FUEL PUMP #1

BROWN (14 GA) TO TAIL LIGHTS


GREEN (14 GA) TO ELECTRIC FUEL PUMP #2

GRAY/WHITE (14 GA) TO ELECTRIC FAN

ORANGE (14 GA) TO ACCESSORY

BROWN (18 GA) TO FUSE BLOCK RELAY (USE IN WITH

P/N 50002 ONLY)

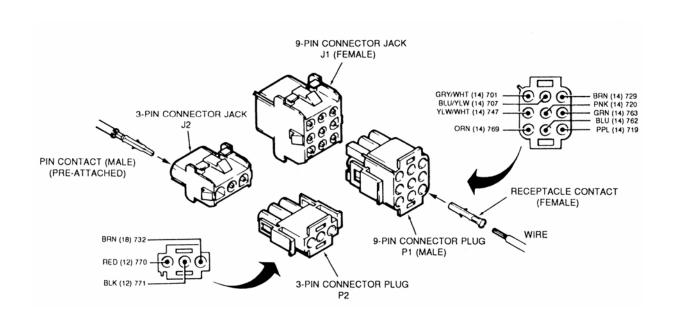

Painless Performance Limited Warranty and Return Policy

Chassis harnesses and fuel injection harnesses are covered under a lifetime warranty.

All other products manufactured and/or sold by Painless Performance are warranted to the original purchaser to be free from defects in material and workmanship under normal use. Painless Performance will repair or replace defective products without charge during the first 12 months from the purchase date. No products will be considered for warranty without a copy of the purchase receipt showing the sellers name, address and date of purchase. You must return the product to the dealer you purchased it from to initiate warranty procedures.