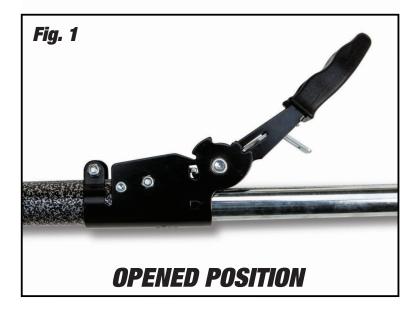## INSTRUCTIONS:

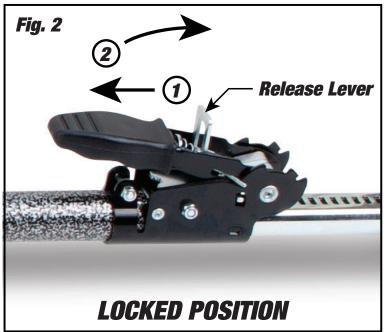### Installing Cargo Bar

1. Pull back on ratchet release lever and lock into open position as shown in figure 1.

2. Extend bar out against side walls and hold in place.

3. Release ratchet lever from open position and ratchet bar tight against walls.

4. **DO NOT** over tighten as this may damage vehicle side walls.

5. When cargo bar is secured in place, pull back cargo release lever and fold down ratchet handle as shown in figure 2.

6. Check periodically that bar is still securely in place

Removing Cargo Bar

1. Pull back on ratchet handle and lock into open position as shown in Figure 1.

2. Push bar ends together to collapse.

3. When collapsed pull back cargo release lever and fold down ratchet handle as shown in figure 2.

Fig. 1

OPENED POSITION

Fig. 2

②

① **Release Lever**

LOCKED POSITION