



Technical Data Sheet

Permatex[®] Form-A-Gasket[®] No. 1 Sealant

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex[®] Form-A-Gasket[®] No. 1 Sealant is a reddish brown, viscous paste with a characteristic alcoholic odor. It is a fast drying paste that changes to a hard, semi flexible seal through solvent evaporation. It seals flanges, fittings, connections and assemblies against leakage. Improves gasket seal in permanent and rigid assemblies.

PRODUCT BENEFITS


- Extends gasket life
- Prevents leaks
- Fast drying
- Hard setting
- Withstands pressures up to 5000 psi

TYPICAL APPLICATIONS

- Freeze plugs
- Automotive and industrial sealant for permanent assemblies
- Threaded connections
- Manifold gaskets
- Air ducts
- Boilers
- Pipe fittings
- Plumbing connections

DIRECTIONS FOR USE

1. Remove all previous material from mating surfaces. Permatex[®] Gasket Remover is recommended for most materials, not for plastics or painted surfaces.
2. For best results, clean and dry all surfaces with a residue-free solvent, such as Permatex[®] Brake and Parts Cleaner.
3. Remove cap, puncture tube or cartridge seal and attach extension nozzle (if provided).
4. When used as a gasket dressing, spread product with a spatula to a uniform film on one side of gasket and then position it on the assembly. Coat the second side of gasket and re-assemble.

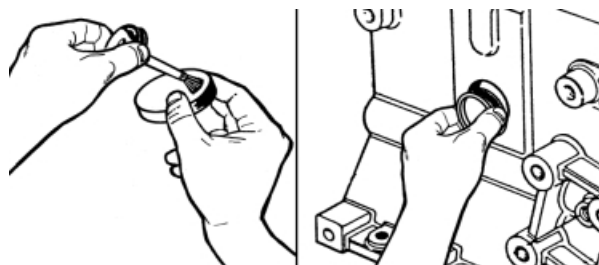

5. Assembly is operational after 2 hours, full cure is effective after 24 hours.

1. The product can be removed from metal surfaces with isopropyl alcohol. If the sealant has been dried for a long time or at high temperatures, cover the sealant with alcohol and allow to soften overnight.
2. Clean hands with Permatex[®] brand hand cleaners.

PROPERTIES OF UNCURED MATERIAL

| | Typical Value |
|---------------------------|-----------------------------------|
| Chemical Type | Modified resin, fillers & alcohol |
| Appearance | Red - brown paste |
| Odor | Alcohol |
| Specific Gravity | 1.5 |
| Viscosity | Viscous paste |
| Flash Point, TCC, _C (_F) | Does not apply |

TYPICAL CURING PERFORMANCE

Permatex[®] Form-A-Gasket[®] No. 1 Sealant once applied, develops a hard, semi-flexible sealant by solvent evaporation. Dry times will vary with temperature, humidity and gap.

TYPICAL ENVIRONMENTAL RESISTANCE

| Temperature Resistance | Typical Values |
|------------------------|-------------------------|
| Continuous, °C (°F) | -54 to 204 (-65 to 400) |

Chemical / Solvent Resistance

The product retains effective properties in contact with water, ethylene glycol, gasoline, motor oil, transmission fluid and sea water.

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

| Part Number | Container Size |
|-------------|----------------------|
| 80007 (1AR) | 1.5 oz. tube, carded |
| 80008 (1BR) | 3 oz tube, carded |
| 80003 (1C) | 11 oz tube, boxed |

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.