



Technical Data Sheet

Permatex[®] Weatherstrip Cement

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex[®] Weatherstrip Cement is a translucent rubber cement that seals rubber and serves to adhere weatherstripping.

PRODUCT BENEFITS


- Seals in minutes
- Dries to a tough, strong bond
- Easy to use

TYPICAL APPLICATIONS

- Door weatherstripping
- Windshield weatherstripping

DIRECTIONS FOR USE

1. Surfaces to be bonded must be clean, dry and free of oil and grease.
2. Apply an even coat of Weatherstrip Cement to the solid surface. Allow to dry.

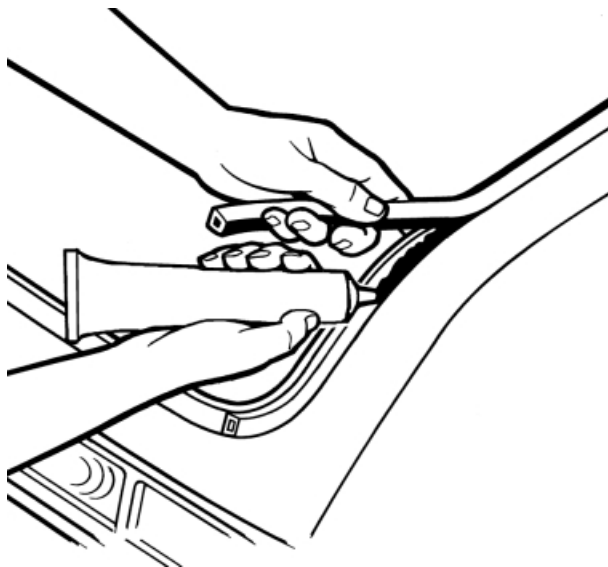

3. Apply a liberal coat to weatherstripping. Set firmly in place.
4. Apply pressure on the bonded surface for a few minutes.
5. Allow to dry.

Chemical Type
Appearance
Odor
Specific Gravity
Viscosity
Flash Point, TCC, _F

Typical Value
Synthetic rubber
Translucent
Solvent
0.73
Flow similar to honey
-10

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
80328 (DCD-19)	2 oz. tube, carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.