



Technical Data Sheet

Permatex® Battery Cleaner

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Battery Cleaner is an aerosol product for cleaning all types of storage batteries and attachments in vehicles and emergency power supply systems. The product penetrates and removes corrosion, dirt and grime instantly.

PRODUCT BENEFITS


- Removes power-robbing corrosion
- Fast acting
- Penetrates - no disassembly required

TYPICAL APPLICATIONS

- Batteries
- Cables
- Terminal connections

DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. Shake can with ball agitator for one minute. For best results, aerosol can should be at room temperature before spraying.
3. Holding can 8 to 10 inches from the surface to be cleaned, press the nozzle and discharge the product onto the corroded area. The product discharges as a foam.

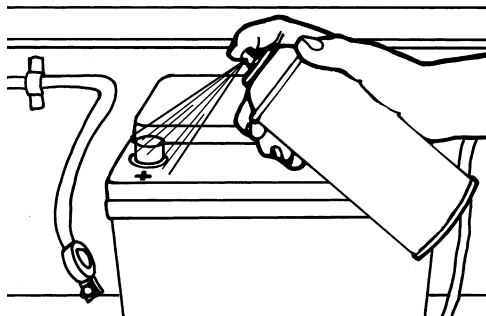

4. Let stand for approximately five minutes
5. Flush with water using a gentle flow to avoid splashing the dissolved corrosion.
6. Wipe battery clean with rag, shop cloth or paper towel.
7. For best results, seal terminals with Permatex® Battery Protector & Sealer.

For Cleanup

1. Clean hands with Permatex® brand hand cleaners.

PROPERTIES OF MATERIAL

| | |
|------------------------------|------------------------------------------------|
| Chemical Type | Alkaline cleaner |
| Appearance | White foam |
| Odor | Amine |
| Flash Point | Aerosol, contents under pressure, consult MSDS |
| NFPA 704 Flammability Rating | 4 (Highly flammable) |

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

| Part Number | Container Size |
|--------------|-------------------|
| 80369 (SA-8) | 6 oz. aerosol can |

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.