

Installation Instructions

1. Cut wires from the battery and switch.
2. Clean the desired mounting surface thoroughly of any oil or dirt.
3. CZ-3055 can be cut into two working strips, if cutting is needed, follow (Fig. D) for instructions.
Note: If you do not cut the strip, you only need to power one side of the strip.
4. Peel adhesion tape cover and apply to cleaned location. Press firmly to insure adhesion. You may bend the strip to conform to any shape but do not fold see (Fig. A).
5. Connect the white wire to a switched power source and the black wire to a chassis ground (Fig. B). You may also connect the LED strip to a fused constant power source using an added switch as shown in (Fig. C). Do not connect directly to the vehicle's battery.

Fig. A

LED Strip

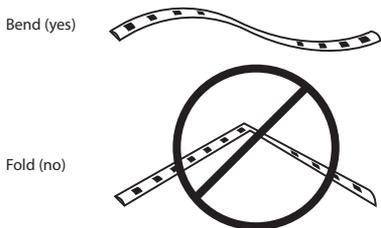


Fig. B

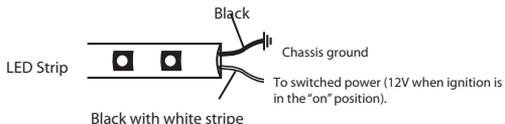


Fig. C

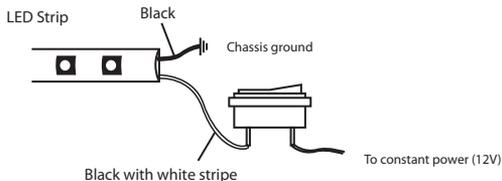


Fig. D

1. Cut the strip at the locations shown below between every third LED.
2. Use sharp scissors to make the cut and reseal the end by applying a drop of silicone sealant on the exposed end.

