



Installation Instructions
Tailgate Lock
PL1350C
 (codeable lock)



Chevy Silverado/ GMC
Sierra 1500
2007 & up
 (New Body Style)
 Full handle replacement
Chevy Silverado/ GMC
Sierra 2500/3500
2008 & Up
 (New Body Style)
 Full handle replacement

Package Contents: Locking Bezel, Replacement Handle Instructions 1 Bolt 1/4" x 2" 1 Washer 1 1/2"	Tools Required: 1/2" Socket 10 mm Socket, Small Flat Head Screwdriver
--	---



STEP 1 - Lower tailgate and remove the bottom center bolt on the inside (backside) of the tailgate. Gently shut the tailgate. Remove the plastic bezel by carefully prying with a flat head screw driver (it is recommended to use a rag or cardboard between the tailgate and screwdriver so not scratch the paint) in the bottom center to pop the bezel clip out of the tailgate. Next gently pry at the upper two corners to release the bezel clips (again it is recommended to use a rag or cardboard between the tailgate and screwdriver so not scratch the paint). The tailgate should look like the picture shown.

STEP 2 – Remove the latch rods from the latch rod clips. Do this by turning the clip off the rod and pulling the rod out of the clip. Remove the other two bolts on the inside (backside) of the tailgate. Hold the handle at the same time to keep it from moving as you remove the bolts. Next remove the OEM handle from the tailgate. Remove the bolt that holds the Pop N Lock components together (do not discard the bolt and washer as they will be used) and install the handle assemble in the tailgate in the same place as the OEM handle. Reinstall the two upper bolts. The bolts go through the inside (backside) of the tailgate and thread into the handle assembly. Do not tighten yet, leave a little loose to allow the handle to move.

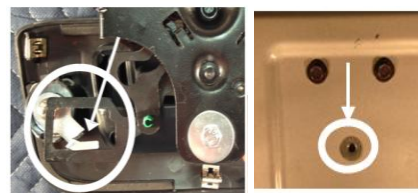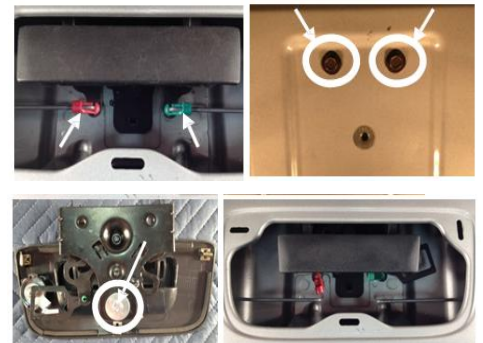

STEP 3 - Insert the latch rods into the rod clips and snap the clips onto the rods. Install the Pop N Lock bezel. Make sure the lock arm aligns to go into the square opening on the handle assembly. Snap the bezel clips into the tailgate. Place the bolt and washer (was removed to separate the components) into the bottom center hole on the inside (backside) of the tailgate. This will thread into the back side of the bezel. You may have to slightly move the handle bezel assemblies to get the bolt to start to thread. Once it starts to thread tighten bolt. Then tighten the other two bolts.

STEP 4 - CAUTION: Only insert key intended for everyday use. (can only be coded once)

1. Remove protective label.
2. Fully insert key intended for everyday use
3. Rotate key clockwise until it stops while maintaining full key insertion. Lock is now fully coded and ready for everyday use.
4. Test lock for proper operation. Turn key clockwise for lock and counter clock for unlock.