

RAINPROOF CARGO BAG

INTRODUCTION

Your Rainproof Cargo Storage Bag is designed to mount to an existing hitch mount cargo carrier. Six lashing straps hold the Cargo Storage Bag to the cargo carrier.

INSTALLATION

1. Spread out the Cargo Storage Bag onto your cargo carrier so that the bag opens to the rear.
2. Unzip the Cargo Storage Bag completely and load bag, placing larger heavier objects in first. Continue to load, placing smaller, lighter items on the top, creating a compact load.
3. Close zipper completely. Make certain the flap is pulled down to completely cover the entire zipper and sealed by the hook and loop closures.
4. Attach the long end of the lashing straps to buckles on the top of the Cargo Storage Bag, as shown in Figure A.
- 5a. If there is an exposed bar on the carrier, attach the short ends of the lashing straps to the cargo carrier, as shown in Figure B.
- 5b. If the straps cannot wrap around the carrier, you must use the included metal rings. Loop the short end of lashing strap through the steel oval ring and fasten the loose end through the buckle. Thread the steel loop through the hole in the carrier and turn 90 degrees to lock the oval ring against the carrier (Figure C).
6. Take up slack in straps. Alternate tightening of the straps until bag is securely attached.

NOTES/CAUTION

- a. When traveling, periodically check straps to ensure load is securely held.
- b. Any excess webbing should be tucked away and tied off to prevent flapping while driving.
- c. After removing contents from the Cargo Storage Bag, remove unit from the cargo carrier and store for safekeeping. Do not drive with empty bag on the cargo carrier.
- d. Do not exceed the manufacturer's rated cargo tray capacity.


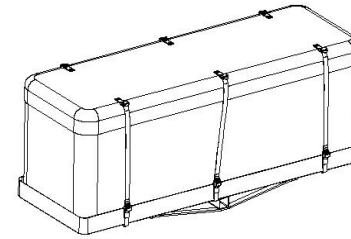


Figure A




Figure B


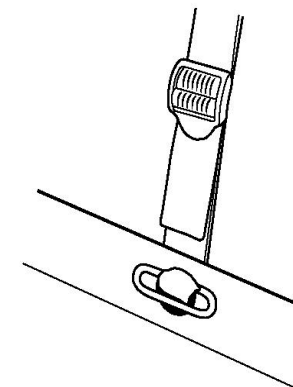


Figure C

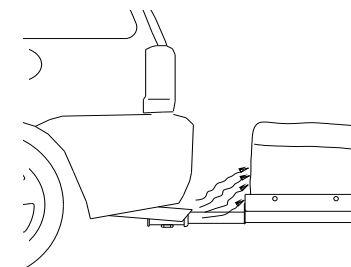

Caution:
Keep clear of vehicle exhaust.