

2007-2018 Jeep Wrangler JK Luminix Tail Lamp Installation

Please read all instructions before installation and to check to see that all parts are included.

KIT CONTENTS:	
Description	Qty.
Driver Side Tail Lamp	1
Passenger Side Tail Lamp	1

Tools Needed:

- Phillips Head Screwdriver
- Flat Head Screwdriver or Chisel
- Zip-Ties

You can find a full installation video on our YouTube page!

Installation Instructions:

1. Uninstall driver's side factory tail lamp by removing 2 Phillips head screws as shown in **Figure 1**. Unplug wiring harness.



Figure 1: Remove 2 screws.

2. Remove expanding foam in cavity behind tail lamp to expose hole in floor board, shown in **Figure 2**. The foam can be removed with a flat head screwdriver, chisel, or your hand.
3. Push tail lamp link cable through the exposed hole. Connect factory wiring harness to Luminix tail lamp. Mount the load resistor to a metal surface away from plastic pieces and wires. This resistor can get very hot, so use caution if the vehicle has been running. Mount Luminix tail lamp using factory screws, making sure that the mounting tab on the tail lamp is inside the sheet metal of the Jeep (see **Figure 3**).
4. Repeat Steps 1-3 on the passenger's side.
5. Connect the tail lamp link cables. Route the cable between the rear bumper support and bumper cover. Zip-tie it in place. Take care to keep the cable away from the exhaust, moving components, and pinch points.



Figure 2: Foam removed and hole exposed.

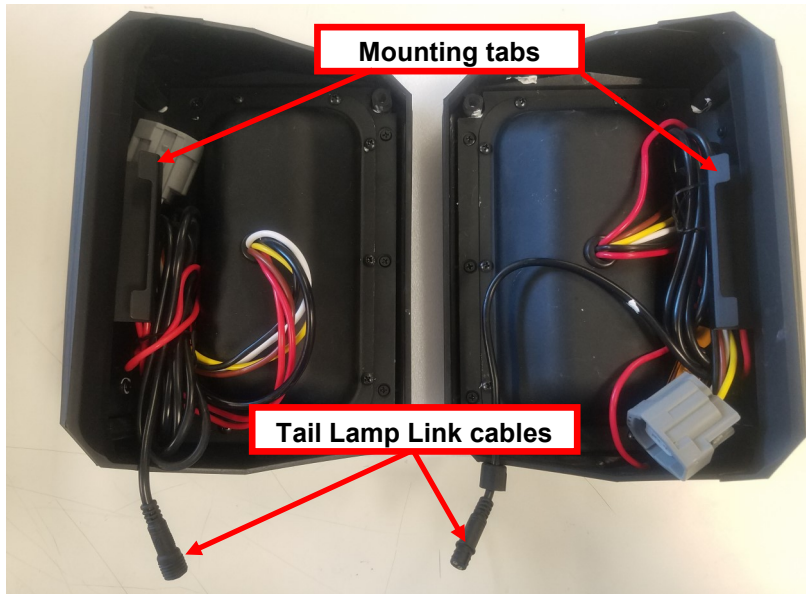


Figure 3: Mounting tab and linking cable.

Enjoy your new Luminix Jeep Tail Lamps!