

INSTALLATION INSTRUCTIONS

PUTCO PURE LED DUALY FENDER MARKER LIGHTS



Please note: You must follow these instructions to install the parts correctly otherwise damage may occur.
Read all instructions before installation and check to see if all parts listed are included.

KIT CONTENTS

Item#	Qty	Description
1	2	Amber LED Marker Light
2	2	Red LED Marker Light

BOLT KIT CONTENTS

None

RECOMMENDED TOOLS

Safety Tools

1. Eye Protection


Installation Tools

1. Pliers

2. Screwdriver

LED FENDER MARKER LIGHT INSTALLATION INSTRUCTIONS

1 Remove existing factory fender marker light from rear fender.

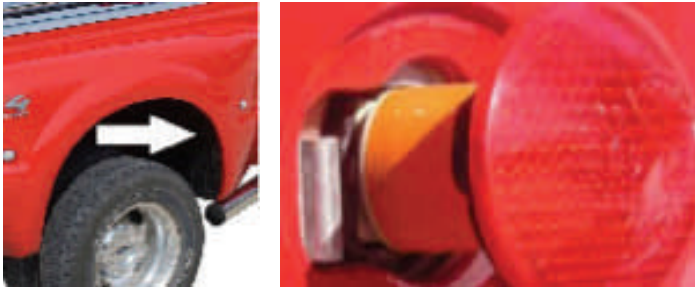

Locate the inner fender plastic and unfasten to allow entry into the fender marker light area. Reach your arm through the inner fender and push the light out.

2 Remove lens and bulb from light socket.



Remove the lens that covers the bulb (typically amber or red plastic) and small light bulb.

3 Test LED Fender Marker Lights in open sockets.

Locate Pure LED Fender Marker Lights and test fit in each of the open sockets. *Note: LED Lights with a red dot should be installed on the rear of the dually fender. LED Lights with a yellow/orange dot should be installed on the front of the fender.*

4 Complete installation of Pure LED Fender Marker Lights.



Clean area around fender marker light of dirt and oils. Install the Pure LED Fender Marker light into the existing socket (view below for exceptions). Remove the backing from the tape on the back of the marker light and position light in place.

1994-2002 Dodge Ram Trucks:

To install LED Fender Marker Light you must splice two wires with the existing factory wiring. Be sure to cover each splice with electrical tape or other electric product.

LED LIGHT WIRE	TRUCK/EXISTING WIRE
Black w/ Red tracer	Ground (black)
Red	Positive