

IMF73



2021+ GEN 3 FORD F-150 RAPTOR MUD FLAP INSTALLATION INSTRUCTIONS









Manufacturer warranty covers material defects on new, never installed parts. Once installed, all mud flap replacement part costs are the responsibility of the vehicle owner. Caution against blind spots during parking. Avoid curbs and excessive compression to the flaps. Check stock and aftermarket wheel/suspension clearances.

INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SEND FLAP RECEIPT OR PHOTO → www.rallyarmor.com/support

Recommended Tools Low-profile offset, ratcheting, flat & Phillips screwdrivers, pick.

ONLY install on even surface using hand tools, not powered tools. AVOID OVERTIGHTENING HARDWARE.

ABOUT OUR STANDARD IN MUD FLAPS Polyurethane is a high grade plastic that may feature minor surface layer marks. These are visual variations that don't affect flap construction or performance. Most matte away as the material ages naturally.

MF73 KIT CONTENTS <i>CONFIRM ALL PARTS AND QUANTITIES BEFORE INSTALLATION</i>			
MUD FLAP KIT PN: MF73	SEE PAGE 3 DRAWINGS	PART DESCRIPTION	QUANTITY
MF73-LF		LEFT FRONT	1
MF73-RF		RIGHT FRONT	1
MF73-LR		LEFT REAR	1
MF73-RR		RIGHT REAR	1
BRACKET KIT PN: BMF73 SEE PG 3			
To preserve the finish on brackets, recoat with a matte black automotive spray, available through auto parts stores.			
BMF73-FRT		BRACKET FRONT	2
BMF73-LR		BRACKET LEFT REAR	1
BMF73-RR		BRACKET RIGHT REAR	1
HARDWARE KIT PN: HMF73 SEE PG 3			
15TAB		TAB	2
SMWASH		WASHER	2
SSLNUT		LOCK NUT	2



ALWAYS TEST COMPATIBILITY WITH YOUR SPECIFIC WHEEL, TIRE AND SUSPENSION COMBINATION



ALWAYS USE CAUTION DURING PARKING/REVERSAL SCENARIOS



CLEANING INSTRUCTIONS: USE WATER AND SOFT CLOTH TO CLEAN FLAPS. AVOID SOLVENT BASED CLEANERS



2021+ GEN 3 FORD F-150 RAPTOR MUD FLAP INSTALLATION INSTRUCTIONS


FRONT MUD FLAP INSTALLATION Bracket/Hardware for 1 Front Flap → Factory Fasteners; 1 x BMF73-FRT

To access interior wheel well, turn steering wheel towards installation side. Do not fully tighten fasteners until mud flap is completely aligned to vehicle.

FIGURE A Temporarily remove factory fasteners 1 & 2.

FIGURE B Subtly contour/shape both ends of BMF73-FRT, so they nest against fender well.

FIGURE C Place flap and bracket against mounts on fender flare. Reinstall factory fasteners through mounts 1 & 2.

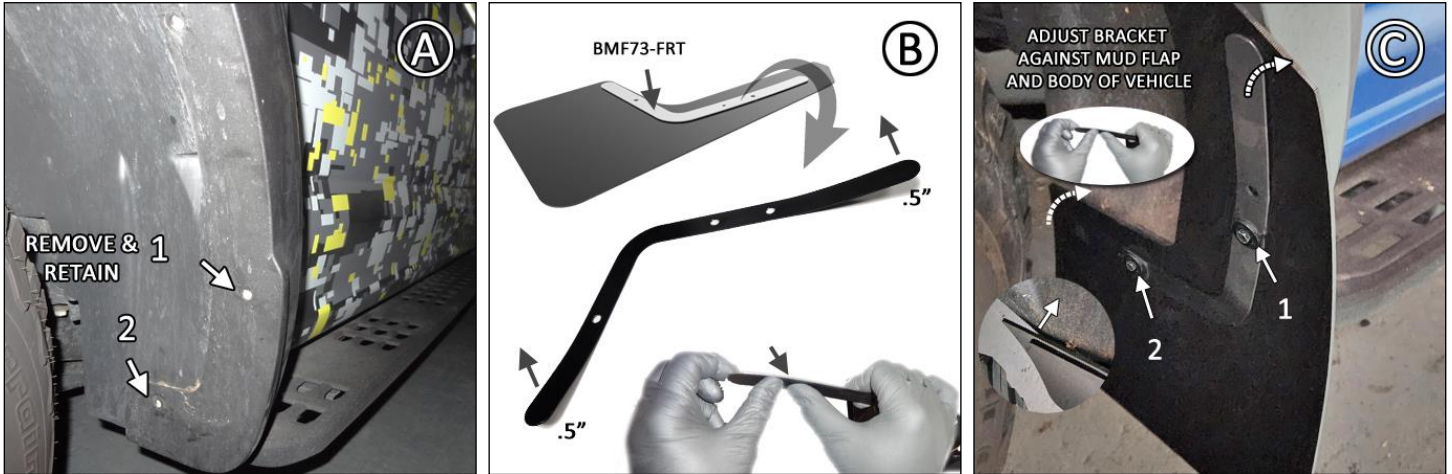

REAR MUD FLAP INSTALLATION

Bracket/Hardware for 1 Rear Flap → Factory Fasteners; 1 x BMF73-LR/RR; 1 x 15TAB; 1 x SMWASH; 1 x SSLNUT

Do not fully tighten fasteners until mud flap is completely aligned to vehicle.

FIGURE D Temporarily remove factory fasteners 1 & 2.

FIGURE E Adhere 15TAB to BMF73-LR/RR.

FIGURE F Position flap against fender flare over mounts 1 & 2. Place U-bend of BMF73-LR/RR over flap and behind fender flare.

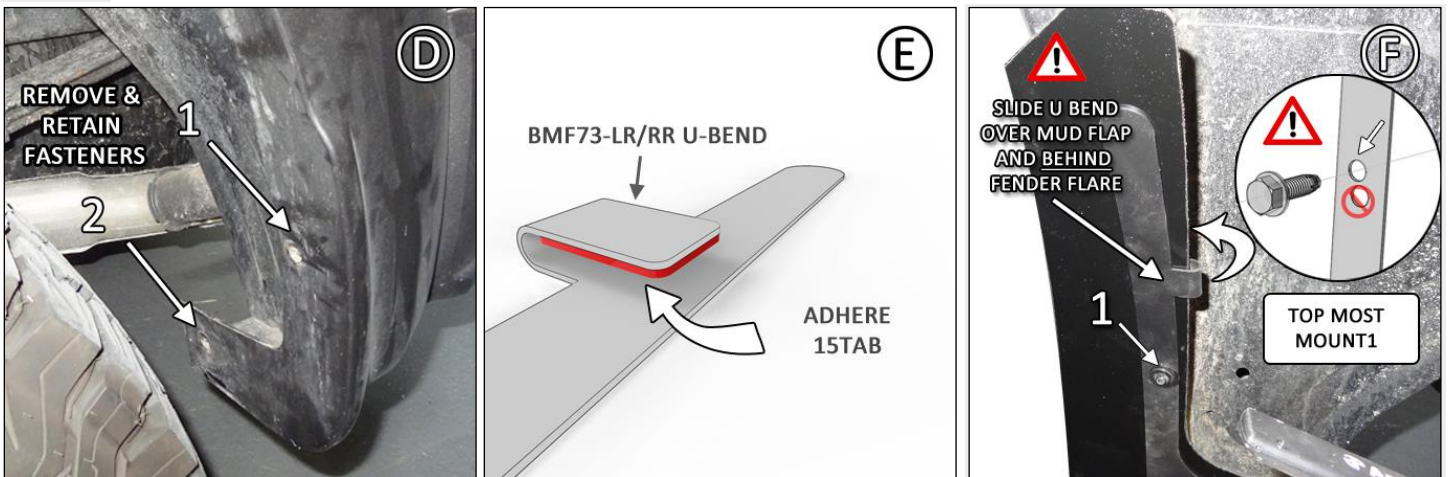


FIGURE G Reinstall factory fasteners through BMF73-LR/RR topmost mount 1, 2, and flap.

FIGURE H Working from the vehicle rear, install SMWASH & SSLNUT into mount 3.

FIGURE I Align flap to even ground. Hand-tighten fasteners until fully seated.

IMF73



2021+ GEN 3 FORD F-150 RAPTOR MUD FLAP INSTALLATION INSTRUCTIONS



FRONT

REAR

