

**STRONG & RELIABLE**

**RAMM**®



**HELPING MAKE  
TRAILERING  
FOR WORK AND  
RECREATION  
EASIER & SAFER.**

**PRODUCT CATALOG**

*“The Best Overall Value In The Industry”*

***STRONG & RELIABLE***  
***RAM***

Pacific Rim International, LLC markets products manufactured by our family business in Ningbo, China.

We are a manufacturer that specializes in a large variety of high precision shafts, gears, auto parts as well as trailer jacks and couplers. Starting in 1992 we have now grown into a mid-size manufacturer. The majority of our products are sold in the US, Europe and multinational corporations within China.

The factory is ISO 9001: 2008 certified.

We offer one line of value priced - high quality products and brand it as such.

We bring these products direct from the factory and combine it with a fully insured United States corporation - Pacific Rim International, LLC. This allows our customers access to low cost manufacturing and is backed by a US company.

We stock product at four US warehouse locations. We also can deliver mixed products in container loads direct to a customer's location.



# STABILIZER JACKS



TJSC-24

**Scissor stabilizer jack is ideal for travel and 5th wheel trailers**

- 5000lb capacity per set (2500lb capacity each jack)
- Adjustable from 4" to 24" vertical height
- Bearing set on crank side for longer jack life
- Eight slotted holes on top jack plate for mounting adjustability
- Black painted finish
- Handle sold separately



SJ-100

**Flip down stabilizer jack is ideal for all types of RV, utility and cargo trailers**

- 650lb lift and 1000lb support capacity per jack
- Adjustable from 11-1/2" to 17-3/4" vertical height
- Handle included with every two stabilizer jacks
- Black painted finish



SJ-Q208

**Telescopic stabilizer jack is Ideal for cargo and industrial type trailers for corner stabilizing**

- 20" durable zinc inner square tube allows multiple height adjustments
- 8" weldable raw with light oil 2" outer tube
- Includes a snap pin for easy and quick adjusting
- 4-1/2" x 6" sand foot
- 2,000 lb. capacity

## RV LANDING GEAR

You will find RAM® landing gear on several 5th wheel RV brands today.

- Durable construction – to last for years
- Black painted outer tube with durable zinc finish inner tube
- Power motor option and wire harness available – to make lifting easy
- Spring foot plunger pin option also available – to make it faster to engage the dropleg


SYSTEM CAPACITY			
RVLG-8000 and RVLG-8000T	SYSTEM LBS.	PER LEG LBS.	
SUPPORT CAPACITY	16,000	8,000	
LIFT CAPACITY MANUAL CRANK	8,000	4,000	
LIFT CAPACITY SINGLE POWER KIT (OPT.)	5,000	2,500	
LIFT CAPACITY DUAL POWER KITS (OPT.)	8,000	4,000	
SYSTEM DIMENSION			
	A	B	C
RVLG-8000	33.5"	29.5"	17.5"
RVLG-8000T	40.5"	36.5"	17.5"
PERFORMANCE DATA			
TRAVEL	20"		
DROP LEG ADJUSTMENT	16"		
MANUAL CRANK TORQUE	150 IN *LBS.		
MEASURED SINGLE POWER KIT AMPS @ RATED LOAD	25A		
SPEED @RATED LOAD	4.0"/MIN.		



RVLG-DFT  
Durable Zinc Foot Pad



M1230  
12V, 30A DC Motor

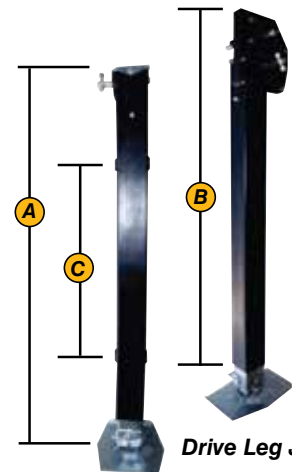

Drive Leg Jack  
Companion Jack



RVLG-RDBOX  
3:1 Reduction Gear Box



Cross Shafts



RVLG-SPP  
Spring Foot Plunger Pin



RVLG-HDL  
Manual Handle



# MARINE SWIVEL JACKS



Ideal for use with boat, sport craft, snowmobile and other recreational trailers.

- Swivel jacks are available in 1,000lb, 1,200lb and 1,500lb capacities and all include a large 1/2" pull pin to activate the swivel mechanism
- Large comfort handle included on all models
- 1,200lb and 1,500lb models include a four bolt pin through design on mounting plate for superior side load support
- 1,000lb models include a bolt through design for side load support
- Durable clear zinc finish
- All bolt on models come with all mounting hardware and fits up to a 3"x5" trailer frame
- All weld on models come with weldable bracket



MJ-1200B



MJSQ-2500B



MJ-1206B



MJ-1500B-DWL



MJ-1500B


Product Code	Support and Lift Capacity	Travel Distance	Bracket Height	Retracted Height	Bracket Type	Caster Size	Unit Weight (lbs)
MJ-1206B	1,000	10"	12.7"	23.25"	Bolt on	6"	14.5
MJ-1206BBX (Retail Boxed)	1,000	10"	12.7"	23.25"	Bolt on	6"	15.5
MJ-1200B	1,200	10"	12.7"	23.25"	Bolt on	6"	15.1
MJ-1200BBX (Retail Boxed)	1,200	10"	12.7"	23.25"	Bolt on	6"	16.1
MJ-1500B	1,500	10"	12.7"	25.25"	Bolt on	8"	17.5
MJ-1500B-DWL	1,500	10"	12.5"	25.25"	Bolt on	Dual 6"	18.7
MJ-1500BBX-DWL (Retail Boxed)	1,500	10"	12.5"	25.25"	Bolt on	Dual 6"	20
MJSQ-2500B	2,500	28"	7"	25.25"	Fixed Mount	Foot	24.2



# MARINE WINCHES

Ideal for marine, utility, recreational and other applications.

- Models with strap feature a 50mm x 23' black webbed strap with a yellow zinc forged safety latched hook
- Solid one piece gears for greater durability
- Thumb latch to lock winch in a desired location
- Handles include a large 3.5" comfort grip
- All models come boxed with a full overlay label
- Durable zinc finish

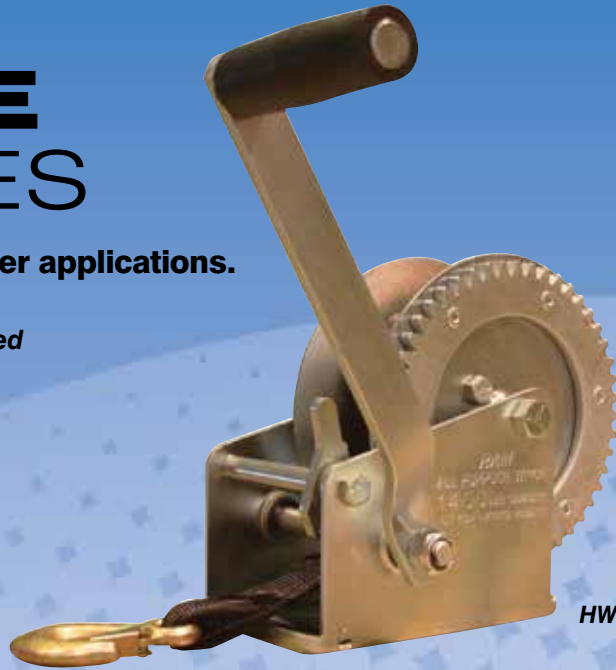


HWSP-1400

Product Code	Capacity (lbs)	Description	Gear Ratio	Maximum Cable Length (Not Incl.)	Unit Weight (lbs)
HWSP-600	600	Hand winch includes 23' strap and 7" handle	3.1:1	4.2mm x 33'	4.4
HW-600	600	Hand winch includes 7" handle	3.1:1	4.2mm x 33'	4.4
HWSP-1000	1,000	Hand winch includes 23' strap and 8" handle	4.1:1	4.5mm x 33'	6.49
HW-1000	1,000	Hand winch includes 8" handle	4.1:1	4.5mm x 33'	6.01
HWSP-1400	1,400	Hand winch includes 23' strap and 10.5" handle	4.1:1	4.8mm x 33'	8.1
HW-1400	1,400	Hand winch includes 10.5" handle	4.1:1	4.8mm x 33'	7.59
HWSP-1600	1,600	Hand winch includes 23' strap and 10.5" handle	4.1:1	5.0mm x 33'	8.14
HW-1600	1,600	Hand winch includes 10.5" handle	4.1:1	5.0mm x 33'	7.63

# BRAKE WINCHES

Ideal for all types of marine, ag, industrial and commercial applications where mechanized lifting is needed

- Brake mechanism activates when operator releases handle
- Poly handle grip that is comfortable to the touch
- Both single speed models come standard with premium clear zinc finish

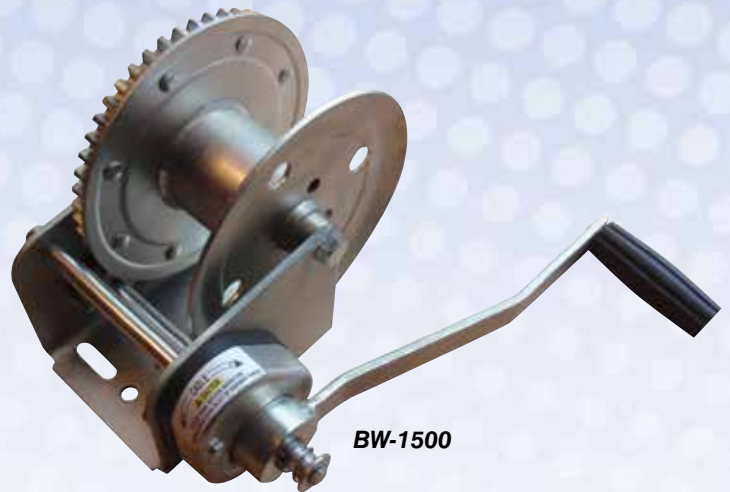

BW-1500

Product Code	Capacity (lbs)	Gear Ratio	Hub Diameter	Handle Length	Reel Capacity Using 1/4" Cable	Unit Wt. (lbs)
BW-1000	1,000	4.1:1	2.25"	11"	55'	9.1
BW-1500	1,500	5.1:1	2.5"	11"	90'	12.25

# ELECTRIC A-FRAME JACKS



For use with trailers with A-frame couplers.

**IDEAL FOR  
CARGO & TRAVEL  
TRAILERS**

**New Model  
Features Bright  
LED Light**

- Easy to operate with just a flip of the switch
- Durable exterior grade black powder coat finish on outer tube
- Zinc finish inner tube with removable sand foot
- 18" travel height
- Includes a drop leg for 7-1/2" of additional adjustment
- Features a very bright LED light for easy night time hookup
- Durable hardened steel gears for years and years of normal use
- Crank handle for manual override in case of power loss
- Setup for 12 volt battery use
- EJ-3520 models include a 57" single wire to hook up to trailer battery
- EJ-3527 models include a 57" wire assembly with seven way plug to hook to tow vehicle



Product Code	Capacity (lbs)	Description	Unit Weight (lbs)
EJ-3520-B	3,500	Electric A-Frame Jack (Black Finish - bulk)	19.8
EJ-3520-BBX	3,500	Electric A-Frame Jack (Black Finish - Retail Boxed)	22
EJ-3520-WBX	3,500	Electric A-Frame Jack (White Finish - Retail Boxed)	22
EJ-3527-BBX	3,500	Electric A-Frame Jack (Black Finish - Retail Boxed)	22
EJ-3527-WBX	3,500	Electric A-Frame Jack (White Finish - Retail Boxed)	22





# A-FRAME JACKS

For use with trailers with A-frame couplers.

- Durable exterior grade black powder coat finish or durable clear zinc plated finish
- Topwind models with large black handle use a bolt head fastener. This is to ensure the handle does not pop off during operation of jack
- Handle arm has durable zinc finish for a nice look
- Some topwind models are available with a comfortable claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Sidewind jacks have an interior gear box for a nice sleek look



TJA-2000-B

TJA-2006-B

TJA-5000B

TJA-5000T-B

TJA-2000S

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJA-2000-B	3,000	2,000	Topwind	14"	8"	20"	Exterior grade black powder coat finish	9.05
TJA-2000-Z	3,000	2,000	Topwind	14"	8"	20"	Durable clear zinc finish	9.05
TJA-2001-B	3,000	2,000	Topwind	14"	5"	20"	Exterior grade black powder coat finish	9.05
TJA-2002-B	3,000	2,000	Topwind	15"	9"	23"	Exterior grade black powder coat finish	10.6
TJA-2006-B	3,000	2,000	Topwind	14"	8"	20"	Exterior grade black powder coat finish	9.05
TJA-5000-B	5,000	5,000	Topwind	14"	10.5"	20"	Exterior grade black powder coat finish	9.63
TJA-5000T-B	5,000	5,000	Topwind	15"	10.5"	22"	Exterior grade black powder coat finish with solid bar handle and claw grip	10.5
TJA-5000T-Z	5,000	5,000	Topwind	15"	10.5"	22"	Durable clear zinc finish with solid bar handle and claw grip	10.5
TJA-2000S	3,000	2,000	Sidewind	14.5"	9"	25"	Exterior grade black powder coat finish	11.0
TJA-5000S-B	5,000	5,000	Sidewind	14.5"	9"	25"	Exterior grade black powder coat finish	12.0

# A-FRAME JACK ACCESSORIES

STRONG & RELIABLE  
**RAM**



JF-101



JF-99



JF-100



**NEW!**

JF-1005H-Z



JC-101



JSP-100

Product Code	Product Type	Lift Capacity (lbs)	Description	Unit Weight (lbs)
JF-1005H-Z	Drop Leg	2,000	9-1/2" drop leg with snap pin (5 position adjustable)	3.5
JC-101	Poly Caster Wheel	1,200	Caster assembly with 2"x6" poly wheel, fits 2" jack tube	3.31
JC-102	Steel Caster Wheel	1,200	Caster assembly with 2"x6" steel wheel, fits 2" jack	4.2
JF-100-B	Black Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 1.7" tall, black powder coat finish	1.78
JF-100-Z	Zinc Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 1.7" tall, clear zinc finish	1.78
JF-101	Zinc Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 8.5" tall, clear zinc finish	3.31
JF-99	Zinc Jack Foot	2,000	Jack foot with hardware, fits all a-frame jacks, clear zinc finish	0.67
JSP-100	Support Plate	N/A	Bottom support plate with 2.29" hole for 2K and 5K A-frame jacks, raw with light oil finish	0.69





# WELD ON BRACKET SWIVEL JACKS

Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.



TJB-2002S-B

TJB-2001-B

- Available with a durable black powder coat outer tube and with a durable zinc finish inner tube or with a durable clear zinc finish outer and inner tubes
- Top wind models come standard with a comfortable claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Deep seated snap ring for side load support and also include a raw weld on bracket
- Large 1/2" pull pin to activate the swivel mechanism
- Grease zerk for easy greasing of jack
- Welded on 3-3/4" x 7-1/2" durable zinc finish sand foot

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJB-2001-B	3,000	2,000	Topwind	10"	11.25"	15.25"	Black powder coat outer tube, clear zinc inner tube	12.1
TJB-2001-Z	3,000	2,000	Topwind	10"	11.25"	15.25"	Clear zinc outer and inner tube	12.1
TJB-2001S-B	3,000	2,000	Sidewind	10"	11.25"	17.5"	Black powder coat outer tube, clear zinc inner tube	13.9
TJB-2002-B	3,000	2,000	Topwind	15"	15"	20.25"	Black powder coat outer tube, clear zinc inner tube	14.5
TJB-2002S-B	3,000	2,000	Sidewind	15"	15"	22.5"	Black powder coat outer tube, clear zinc inner tube	16.3

# PIPE MOUNT SWIVEL JACKS



**Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.**

- Available with a durable black powder coat outer tube and with a durable zinc finish inner tube or with a durable clear zinc finish outer and inner tubes
- Top wind models come standard with a comfortable claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Includes a pin and lanyard assembly as well as a 2" raw male mating pipe (TJP-7001 models include a heavy duty 3" female mating pipe)
- Grease zerk for easy greasing of jack
- 3,000 lb. and 5,000 lb. models come standard with a welded on 3-3/4" x 7-1/2" durable zinc finish sand foot
- 8,000 lb. models come standard with a welded on 6" x 8" durable zinc finish sand foot



Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJP-2001-B	3,000	2,000	Topwind	10"	11.25"	15.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	11.7
TJP-2001S-B	3,000	2,000	Sidewind	10"	11.25"	17.5"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.5
TJP-2002-B	3,000	2,000	Topwind	15"	15"	20.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.9
TJP-2002S-B	3,000	2,000	Sidewind	15"	16.25"	23.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	15.7
TJP-5001-B	5,000	3,000	Topwind	10"	11.25"	15.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	12.0
TJP-5002-B	5,000	3,000	Topwind	15"	15"	20.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	14.5
TJP-5001S-B	5,000	3,000	Sidewind	10"	11.25"	17.5"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.8
TJP-5002S-B	5,000	3,000	Sidewind	15"	16.25"	23.25"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	16.8
TJP-7001-B	8,000	7,000	Topwind	10"	11.5"	18.5"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	14.2
TJP-7001S-B	8,000	7,000	Sidewind	10"	11.5"	21.5"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	16.0



# WELD ON SQUARE TUBE JACKS

Ideal for use with ag, industrial, commercial, large utility and many other types of trailers.



TJD-7000S

TJDP-5000-FLB

TJDP-5000S-FLB

- Topwind models come standard with a comfortable claw knob on a clear zinc solid bar handle that can be folded away when not in use
- All models come standard with a black painted outer tube and a durable zinc finish inner tube
- Both drop leg and fix leg models are available
- 5,000lb models use a 2 1/4" outer tube and include a 3-3/4" x 7-1/2" weld on durable zinc finish sand foot
- 8,000lb models use a 2 1/2" outer tube and come with a large 6" x 8" weld on durable zinc finish sand foot
- 8,000lb sidewind models also include a belly band welded to the bottom of the outer tube for added strength
- All models come standard with a grease zerk for easy greasing of jack

## PIPE MOUNT SWIVEL JACKS

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJDP-5000-FLB	5,000	3,000	Topwind	15"	15.2"	24"	Fixed Leg with base	18.3
TJDP-5000S-FLB	5,000	3,000	Sidewind	15"	15.2"	24"	Fixed Leg with base	19.3
TJDP-7000S-FLB	8,000	7,000	Sidewind	15"	14"	25.5"	Fixed Leg with base	24.3
TJDP-7000S-B	8,000	7,000	Sidewind	15"	15.2"	25.5"	Drop Leg	28
TJDP-7000-B	8,000	7,000	Topwind	15"	15.2"	25.5"	Drop Leg	27
TJDP-7000-FLB	8,000	7,000	Topwind	15"	16.7"	25.5"	Fixed Leg with base	22.80

## DIRECT WELD JACKS

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJD-5000	5,000	3,000	Topwind	15"	N/A	24.5"	Drop Leg	19.2
TJD-5000S	5,000	3,000	Sidewind	15"	N/A	24.5"	Drop Leg	20.2
TJD-5000S-FL	5,000	3,000	Sidewind	15"	N/A	24"	Fixed Leg without base	16.65
TJD-7000	8,000	7,000	Topwind	15"	N/A	23.5"	Drop Leg	22.3
TJD-7000S	8,000	7,000	Sidewind	15"	N/A	25.5"	Drop Leg	23.8

*"The Best Overall Value In The Industry"*



# WELD ON SINGLE SPEED SQUARE TUBE JACKS



Ideal for commercial, construction and other types of trailers where heavy duty lifting is needed.





TJD-12000SP-F2



TJD-12000TW-R

Eased/bevel on shaft end eliminates sharp metal edge

Large octagon brass bushing for even better function

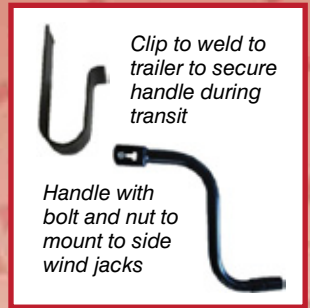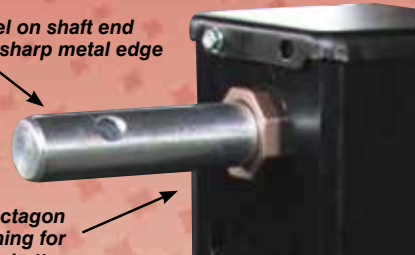

- Models come standard with black painted outer and inner tubes
- Some models are also available with raw finish and high temperature grease for a trailer builder utilizing powder coat application
- 12K models use a heavy 1-1/4" jack screw for a durable 10,000lb lift capacity and is rated as such
- 12K sidewind models include a large octagon brass bushing for even better function
- 12K models are available in spring or non spring return
- 12K sidewind models are available with or without handle, handle mounting hardware and weld on clip
- Grease zerks for easy greasing of jack

## DIRECT WELD NON SPRING RETURN

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD-12000TW-R	12,000	10,000	Topwind	12.5"	23.5"	25.5"	Pin to side, handle, mounting hardware and clip included	54
TJD-12000-F2	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	61.6
TJD-12000-F2NH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle not included	58.1
TJD-12000-R2	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle, mounting hardware and clip included	61.6
TJD-12000-R2NH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle not included	58.1

## DIRECT WELD SPRING RETURN

TJD-12000TWSP-F	12,000	10,000	Topwind	12.5"	23.5"	25.5"	Pin to front, handle, mounting hardware and clip included	54
TJD-12000SP-F2	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	61.6
TJD-12000SP-F2NH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle not included	58.1
TJD-12000SP-R2	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle, mounting hardware and clip included	61.6
TJD-12000SP-R2NH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle not included	58.1



# WELD ON TWO SPEED SQUARE TUBE JACKS

Two speed jacks offer a high and low gear. Low gear is designed to be able to lift heavy loads while still being easy to operate.



TJD2SP-12900SP-F

**New design features a faster high speed with good lifting capability. Also provides an even smoother lift in low gear.**

Eased/bevel on shaft end eliminates sharp metal edge



Large octagon brass bushing for even better function

- Models come standard with black painted outer and inner tubes
- 12K sidewind models include a large octagon brass bushing for even better function
- Two speed gear boxes are within the width of the outer tube to eliminate interference issues at the front of the trailer
- Two speed models come standard with handle, handle mounting hardware and weld on clip
- Grease zerk for easy greasing of jack
- 12K model uses a heavy 1-1/4" jack screw for a durable 10,000lb lift capacity and is rated as such
- All two speed jacks use brass bushings for easier cranking and reduces wear for years of use

## DIRECT WELD SPRING RETURN - 12K TWO SPEED

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD2SP-12900SP-F	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	68.6
TJD-12000SP-F2NH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, single speed companion jack when used in tandem, handle not included	58.1

*"The Best Overall Value In The Industry"*

# WELD ON TWO SPEED SQUARE TUBE JACK

STRONG & RELIABLE  
**RAM**



- Improved interior design that enhances operation of jack.
- Heavy duty cross shaft weldment and brass bushings for durability and superior lift
- Eased/bevel on shaft end eliminates sharp metal edge
- Two speed model comes standard with handle, handle mounting hardware and weld on clip
- Two speed model includes a welded belly band on the bottom of the outer tube for additional strength to perform those heavy duty applications
- Comes standard with grease zerks for easy greasing of jack

TJD2SP-25100-F

## LANDING GEAR SYSTEM

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD2SP-25100	25,000	25,000	Sidewind	12.5"	26.5"	25.5"	Pin to side, handle, mounting hardware and clip included	105
TJD-25100	25,000	25,000	Sidewind	12.5"	26.5"	25.5"	Pin to side, single speed companion jack when used in tandem, handle not included	82
TJD2SPSET-50100	50,000 Total (25,000/leg)	50,000 Total (25,000/leg)	Sidewind	12.5	26.5"	25.5"	Includes TJDSP-25100 and TJD-25100 above	187





# SEMI TRAILER LANDING GEAR

Ideal for semi/tractor trailers or any large trailers where super duty strength is needed.



STLG-50033

- 50,000lbs. lifting capacity (per pair) @ 100 ft. lbs. input torque, 140,000lbs. support capacity and 27,000lbs. sideload capacity
- Two gear ratios: low speed 34.5 turns per inch, high speed 4.5 turns per inch
- Includes TTMA mount locations for bolting jacks to trailer frame
- Includes heavy duty sand foot
- Belly Band welded to bottom of outer tube for added strength
- Durable black paint finish

## SEMI TRAILER LANDING GEAR

Product Code	Lift Capacity (lbs)	Retracted Height	Extended Height	Description	Unit Weight (lbs)
STLG-50033-H12	50,000 Total (25,000 per leg)	33.7"	52.6"	Includes two speed and single speed jack set, 12" handle and cross bar, 4.5" jack outside tube	198
STLG-50033-H21	50,000 Total (25,000 per leg)	33.7"	52.6"	Includes two speed and single speed jack set, one 21" handle and cross bar, 4.5" jack outside tube	198

*"The Best Overall Value In The Industry"*

# STAMPED TRAILER COUPLERS



- Stamped couplers are 100% ball fitted to ensure a proper fit when coupler is hooked up to a hitch ball
- Black finish stamped couplers come standard with a durable black powder coat finish
- Coupler latch designs are setup for easy, yet safe coupling and uncoupling
- Include all SAE required markings and are compliant to standard J684



CA-5400-B



CA-5335-B



CA-5100-B



CA-5210-B



CT-5003-Z

## STRAIGHT COUPLERS

Product Code	Ball Size	Channel Width	Capacity (lbs)	Finish	Unit Wt. (lbs)
CT-2001-O	1-7/8"	2"	2,000	Raw with light oil	2.9
CT-2001-Z	1-7/8"	2"	2,000	Durable zinc finish	2.9
CT-2002-O	1-7/8"	2-1/2"	2,000	Raw with light oil	3.2
CT-2002-Z	1-7/8"	2-1/2"	2,000	Durable zinc finish	3.2
CT-2003-O	1-7/8"	3"	2,000	Raw with light oil	3.5
CT-2003-Z	1-7/8"	3"	2,000	Durable zinc finish	3.5
CT-3001-O	2"	2"	3,500	Raw with light oil	4.0
CT-3001-Z	2"	2"	3,500	Durable zinc finish	4.0
CT-3002-O	2"	2-1/2"	3,500	Raw with light oil	4.4
CT-3002-Z	2"	2-1/2"	3,500	Durable zinc finish	4.4
CT-3003-O	2"	3"	3,500	Raw with light oil	4.5
CT-3003-Z	2"	3"	3,500	Durable zinc finish	4.5
CT-5003-O	2"	3"	5,000	Raw with light oil	4.6
CT-5003-Z	2"	3"	5,000	Durable zinc finish	4.6

## TOP LATCH A-FRAME COUPLERS

Product Code	Ball Size	Capacity (lbs)	Finish	Unit Wt. (lbs)
CA-5100-O	2"	5,000	Raw with light oil	7.0
CA-5100-B	2"	5,000	Black powder coat	7.0
CA-5335-B	2-5/16"	13,000	Black powder coat	9.0
CA-5400-O	2-5/16"	14,000	Raw with light oil	9.4
CA-5400-B	2-5/16"	14,000	Black powder coat	9.4

## EXT. YOKE/HELMET A-FRAME COUPLERS

CA-5210-O	2"	8,000	Raw with light oil	7.9
CA-5210-B	2"	8,000	Black powder coat	7.9



# PRECISION CAST TRAILER COUPLERS

**Sleeve Lock Couplers Now Feature Solid Shank and Re-enforced Sleeve Collar for Even Greater Strength!**

- A-frame sleeve lock couplers are stronger and have more steel content than others in the marketplace.
- The new patent pending 15K and 20K capacity couplers feature a heavy duty cast head with a top lever latch and pin assembly. (Models CA-5280-RB, CA-5280-QB, CTA-280 and CTA-80PL)
- Black finish couplers come standard with a durable black powder coat finish.
- Include all SAE required markings and are compliant to standard J684



CA-5296-B



**RAM** sleeve lock couplers feature a precision cast coupler head that is distinguished from other manufactures. Its symmetric, straight with two corners and flat top shape allows for a self adjusting coupler head. This makes it easy, yet safe for coupling and uncoupling.

(Models CA-5196-B, CA-5296-B, CTA-196, CTA-296, CA-5196H-B and CA-5296H-B)

Re-enforced inside ring on front portion of collar sleeve



Solid Shank

(Shown raw before prepared for black powder coat finish)



## SLEEVE LOCK A-FRAME COUPLERS

Product Code	Ball Size	Capacity (lbs)	Finish	Unit Wt. (lbs)
CA-5196-B	2"	7,000	Black powder coat finish - Low Profile Latch	14.9
CA-5296-B	2-5/16"	12,500	Black powder coat finish - Low Profile Latch	17.8
CA-5196H-B	2"	7,000	Black powder coat finish - High Profile Latch	14.9
CA-5296H-B	2-5/16"	12,500	Black powder coat finish - High Profile Latch	17.8

## HEAVY DUTY A-FRAME COUPLERS

CA-5280-RB	2-5/16"	15,000	Black powder coat finish	22
CA-5280-QB	2-5/16"	15,000	Black powder coat finish (square jack hole)	22

## FLAT MOUNT COUPLERS

CTA-400PL	2-5/16"	14,000	Stamped coupler, black powder coat with mounting plate	9.8
CTA-80PL	2/5/16"	20,000	Black powder coat finish, heavy duty cast head bolt on coupler (incl. coupler latch safety pin)	14.1



CA-5296H-B



CA-5280-RB



CTA-80PL  
Flat Mount Coupler



# ADJUSTABLE TRAILER COUPLERS



CTA-296



CTA-400



CTA-280



4 Hole  
3-Position  
Channel



6 Hole  
5-Position  
Channel

- 15K capacity adjustable coupler features a heavy duty precision cast head with a very durable top lever latch and pin assembly. (Models CTA-280)
- Adjustable couplers come standard with grade 8 nuts and bolts and are setup for an industry standard 3" wide channel
- Black finish couplers come standard with a durable black powder coat finish
- Sleeve lock adjustable couplers feature a solid shank for greater strength. (CTA-196 and CTA-296)
- Include all SAE required markings and are compliant to standard J684

Product Code	Ball Size	Capacity (lbs)	Description	Unit Wt. (lbs)
CTA-400	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts	8.7
CTA-400CB4	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts, 4 hole/3 position channel	14.0
CTA-400CB6	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts, 6 hole/5 position channel	16.2
CTA-196	2"	7,000	Black powder coat finish, solid shank, sleeve lock adjustable coupler w/grade 8	11.4
CTA-296	2-5/16"	12,500	Black powder coat finish, solid shank sleeve lock adjustable coupler w/grade 8	12.9
CTA-280	2-5/16"	15,000	Black powder coat finish, heavy duty cast head adjustable coupler with grade 8 bolts/nuts	14.5
CTA-CB4	N/A	14,000	4 hole / 3 position channel, raw with light oil	4.4
CTA-CB6	N/A	14,000	6 hole / 5 position channel, raw with light oil	7.2
CTA-CB126	N/A	15,000	6 hole / 5 position channel, raw with light oil (1/2" plate material)	10.0

# 25K GOOSENECK COUPLER

STRONG & RELIABLE  
**RAM** *Elite*  
SERIES



Cupped  
Ball Clamp  
for Better  
Fit!

**NEW!**

- Features new innovative locking/unlocking mechanism
- Easy one hand operation makes coupling and uncoupling a snap
- Cupped ball clamp / ball socket allows for greater ball rotation when towing through uneven surfaces
- Load bearing pin that meets SAE J2638 standard
- Total of 8" height adjustment with 4 pin hole locations
- Retracted height of 29-1/2"
- 25,000 load capacity



GCPN-25009

*"The Best Overall Value In The Industry"*

TRAILER PRODUCTS | 19



# GOOSENECK COUPLERS



GCPN-25008



GCSQ-25008



GCSQTW-30008



GC-24008



GCPN-30008

- Hidden spring latch mechanism within casting for ease of use and protection of moving parts
- All gooseneck couplers with load bearing pin meet the SAE J2638 standard
- 30K gooseneck couplers and 25K and 30K square tube gooseneck couplers include a welded belly band on the bottom of the outer tube for added strength



Precision cast head design features **EXCLUSIVE ONE PIECE COUPLER CASTING** with a curved internal ball clamp bar for greater strength and even better fit!

## ROUND TUBE WITH 2 SET SCREWS

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
GC-24008	2-5/16"	24,000	4.5"	0.24"	30"	8"	Solid one piece cast head with curved internal ball clamp bar	54
GC-30008	2-5/16"	30,000	4.5"	0.30"	30"	8"	Solid one piece cast head with curved internal ball clamp bar	60

## ROUND TUBE WITH LOAD BEARING PIN / 2 SET SCREWS

GCPN-25008	2-5/16"	25,000	4.5"	0.24"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	54
GCPN-30008	2-5/16"	30,000	4.5"	0.30"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	60

## SQUARE TUBE WITH LOAD BEARING PIN / 1 SET SCREW

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
GCSQ-25008	2-5/16"	25,000	4.5"	0.24"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	64
GCSQ-30008	2-5/16"	30,000	4.5"	0.24"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	64


## SQUARE TUBE WITH TOP WIND CRANK

GCSQTW-30008	2-5/16"	30,000	4.5"	0.275"	32"	7"	Solid one piece cast head with curved internal ball clamp bar	78
--------------	---------	--------	------	--------	-----	----	---	----




# KING PIN GOOSENECK COUPLERS

STRONG & RELIABLE  
**RAM**

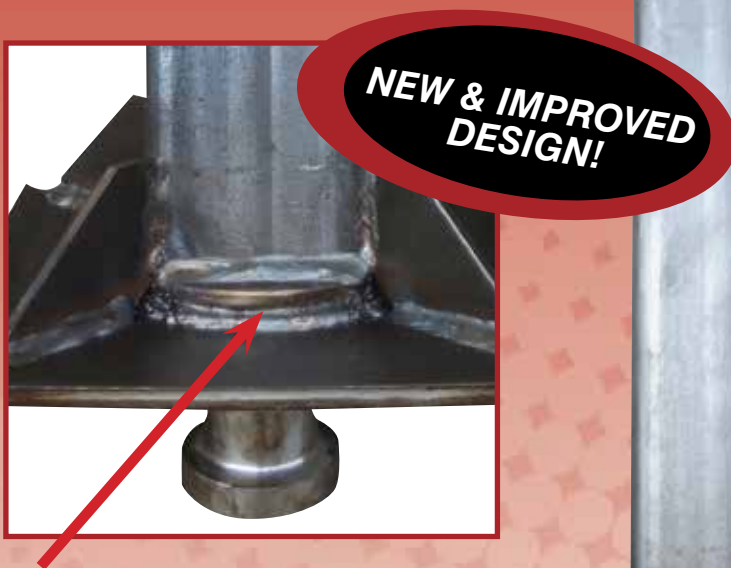

**New design features king pin head welded to gooseneck inner tube for added strength!**

- Available both in round tube and square tube designs
- Now available in both 25K and 30K capacities
- 30K designs include a welded belly band at the bottom of the outer tube for added strength
- All king pin models include load bearing pin design to meet SAE J2638 standard
- All king pin models have an 8" height adjustment

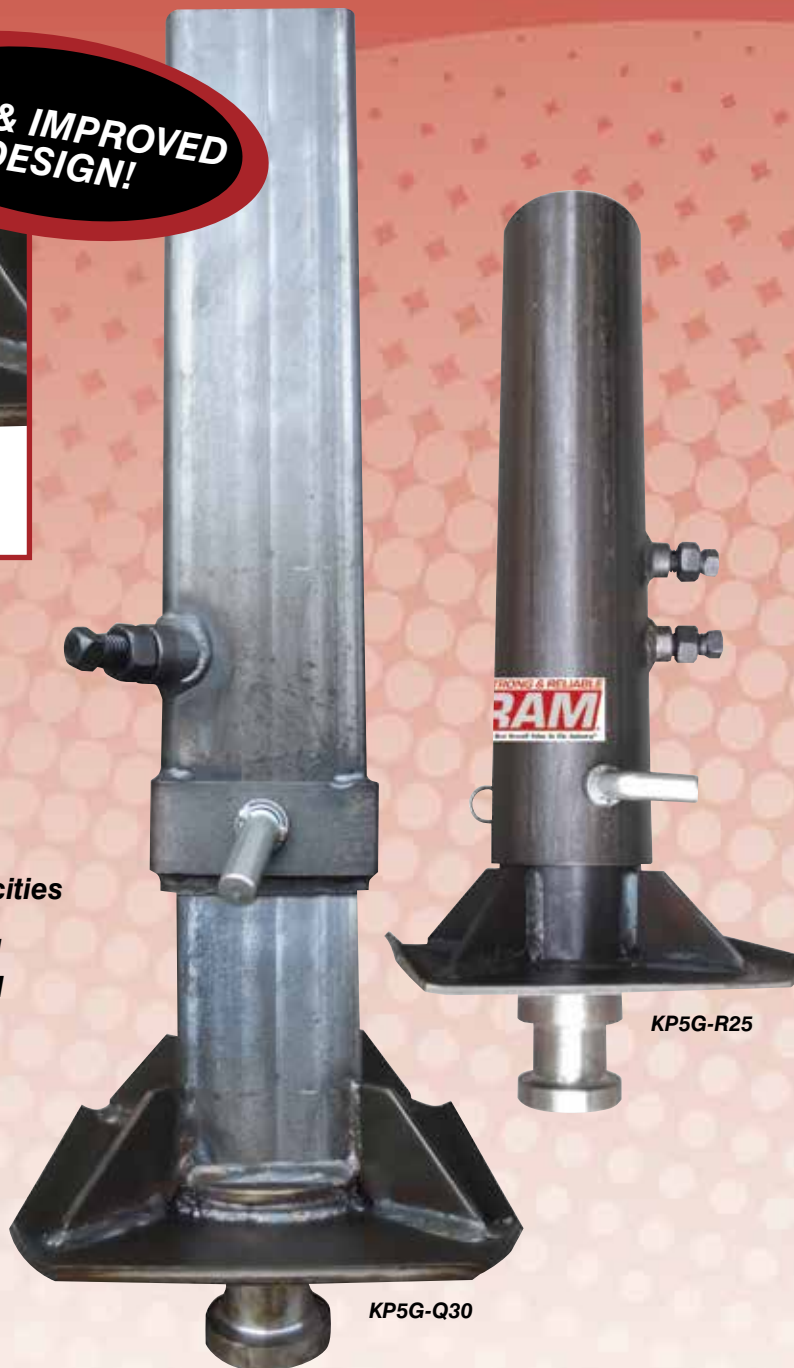

<b>KP5G-R25</b>	25K	ROUND	TUBE	KING PIN	GOOSENECK
<b>KP5G-Q25</b>	25K	SQUARE	TUBE	KING PIN	GOOSENECK
<b>KP5G-R30</b>	30K	ROUND	TUBE	KING PIN	GOOSENECK
<b>KP5G-Q30</b>	30K	SQUARE	TUBE	KING PIN	GOOSENECK

*"The Best Overall Value In The Industry"*

**TRAILER PRODUCTS** | 21

# FORGED D-RINGS



Product Code	Diameter	Interior Dimensions	Safe Working Load (lbs)	Ultimate Breaking Strength (lbs)	Description	Unit Wt.
DR-12W	1/2"	2-1/2"x2-3/8"	4,080	11,780	Forged from C1045 steel with weld on mounting bracket	.99
DR-12B	1/2"	2-1/2"x2-3/8"	4,080	11,780	Forged from C1045 steel with two hole bolt on mounting bracket	.99
DR-58W	5/8"	3"x3"	6,130	18,390	Forged from C1045 steel with weld on mounting bracket	1.86
DR-340W	3/4"	3"x3"	9,120	26,500	Forged from C1045 steel with weld on mounting bracket	2.75
DR-1034W	1"	3"x4"	15,586	46,760	Forged from C1045 steel with weld on mounting bracket	4.73

# SAFETY CHAIN



Product Code	Cell Dia.	Overall Length	Capacity (lbs)	Cell Grade	Hook Description	Unit Wt. (lbs)
SC31624	3/16"	24"	3,200	30	1 S-Hook with safety latch (*1)	.95
SC31627	3/16"	27"	3,200	30	1 S-Hook with safety latch (*1)	1.1
SC31648	3/16"	48"	3,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	1.9
SC1427	1/4"	27"	5,200	30	1 S-Hook with safety latch (*1)	1.7
SC1448	1/4"	48"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.0
SC1454	1/4"	54"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.4
SC1460	1/4"	60"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.7
SC113230	5/16"	30"	7,600	30	1 S-Hook with safety latch (*1)	2.7
SC113254	5/16"	54"	7,600	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	5.0
SC1430-G43	1/4"	30"	7,800	43	1 Forged slip hook with safety latch (*2)	2.1
SC51635-G43	5/16"	35"	11,700	43	1 Forged slip hook with safety latch (*2)	3.6
SC3835-G43	3/8"	35"	16,200	43	1 Forged slip hook with safety latch (*2)	5.8
SC1436-G70	1/4"	36"	12,600	70	1 Forged slip hook with safety latch (*2)	2.5
SC3835-G70	3/8"	35"	26,400	70	1 Forged slip hook with safety latch (*2)	5.2

# REPLACEMENT & REPAIR PARTS

## 2K AND 5K ROUND TUBE JACKS

 <b>TJA-2000-HD/ MJ-1500B-HD 2K &amp; 5K Topwind Handle</b>	 <b>TJA-2000-BR 2K &amp; 5K Bearing</b>	 <b>TJP-IP58 2" Inner (5/8" hole) Mating Tube</b>	 <b>TJP-PN916 9/16" Pin w/Chain (Includes replacement rivet)</b>
 <b>TJA-2000S-HD 2K Sidewind Handle</b>	 <b>TJA-2000S-CP/ MJ-1500B-CP 2K Sidewind Cap</b>	 <b>TJP-FP58 3" Inner Mating Tube</b>	 <b>TJP-PN58 5/8" Pin w/Chain (Incl replacement rivet)</b>
 <b>TJPB-HD Wire Handle with Claw Knob</b>	 <b>TJB-MB Mounting Brackets</b>	 <b>TJP-OP 2.5" Mounting Tube</b>	
 <b>TJA-2000S-GR 2K &amp; 5K Sidewind Gear Kit</b>	 <b>TJP-IP 2" Inner Mating Tube</b>	 <b>TJP-OP58 2.5" Mounting Tube with 5/8" Hole</b>	

## SQUARE TUBE AND DROP LEG JACKS

 <b>TJD-7000-BR 7K Jack Bearing</b>	 <b>TJD-7000-PN 7K Jack Foot Pin</b>	 <b>TJD-12000-CLIP 12K Jack Handle Clip</b>	 <b>TJD-12000-SHABU 12K Sidewind Jack Handle Shaft w/Brass Bushings</b>
 <b>TJD-7000S-GR 7K Sidewind Gear Kit</b>	 <b>TJD-7000S-BU 7K Sidewind Jack Handle Shaft Bushing</b>	 <b>TJD-12000-NUT 12K Jack Threaded Lift Nut with Grease Retaining Structure</b>	 <b>TJD-12000-PPN</b>
 <b>TJD-7000HD 7K Topwind Handle</b>	 <b>TJD-12000-BR 12K Jack Bearing</b>	 <b>TJD-12000-ROD Threaded ACME Rod (For 12K Jacks)</b>	 <b>TJD-5000S-CP/ MJSQ-2500B-CP</b>
 <b>TJD-7000S-HD 7K Sidewind Handle</b>	 <b>TJD-12000-GR 12K Sidewind Jack Gear Kit</b>	 <b>TJD-12000-RSP Spring (For 12K Spring Return Jacks)</b>	 <b>TJD-5000-FT/ MJSQ-2500FT Drop Leg Foot</b>
 <b>TJD-7000S-CP 7K Sidewind Jack Cap</b>	 <b>TJD-12000-CP 12K Sidewind Jack Cap</b>	 <b>TJD-12900-GBX Gear Box (For 12K Two Speed Jacks)</b>	
 <b>TJD-7000FT 7K Jack Drop Leg</b>	 <b>TJD-12000-HD 12K Sidewind Jack Handle</b>		

## COUPLER REPAIR PARTS

 <b>CT-2000-RK Repair Kit (For 1-7/8" Ball Straight Channel Couplers)</b>	 <b>CT-3000-RK Repair Kit for all 2" Ball Stright Channel Couplers (2", 2-1/2" and 3" Channels)</b>	 <b>CA-5100-RK Repair Kit (For 2" A-Frame Couplers)</b>
---	--	---

## MISCELLANEOUS REPLACEMENT PARTS

 <b>HDKB-BLK Black Handle (For Sidewind Jacks)</b>	 <b>GRS-ZERK Jack Grease Zerk</b>	 <b>SS-34103 3/4" Set Screw (For Gooseneck Couplers)</b>	 <b>JFC-PN Snapper Pin (For Jack Foot, Caster Wheel and Couplers)</b>	 <b>CA-5196-PN Pin (For 7K and 12.5K Sleeve Lock Couplers)</b>
 <b>HDKB-BLKF Black Handle (For Topwind Jacks)</b>	 <b>SNP-RING 2" Snap Ring</b>	 <b>GC-RSPN Gooseneck Coupler Return Spring (For Gooseneck Designs with Separate Sliding Bottom Plate)</b>	 <b>GCPN-PIN Load Bearing Pin (For all Load Bearing Pin Gooseneck Couplers)</b>	 <b>CA-5196-SPR Spring (For 7K and 12.5K Sleeve Lock Couplers)</b>
 <b>HDKB-BLK Claw Handle (For Topwind Jacks and 30K Adjustable Gooseneck Coupler)</b>	 <b>MBT58500-LN58 5/8" x 5" Grade 8 Bolt/Nut (For Adjustable Couplers)</b>			
	 <b>PLGPIN-12 1/2" Plunger Pin Assembly</b>			

## MARINE SWIVEL JACKS

 <b>MJ-1000B-HD Handle replacement (For MJ-1000 series)</b>	 <b>MJ-1000B-CP Cap (For 1000lb and 1200lb Marine Jacks)</b>	 <b>MJ-1000B-GR Gear kit</b>	 <b>JWK-6DP 6" Dual Wheel</b>	 <b>MJ-1001B-MK Bolt through mounting kit (For MJ-1001B)</b>
 <b>MJ-1000B-KB Handle knob with bolt and nut</b>	 <b>MJ-1000B-MBB Bolt on mounting bars and bolts</b>	 <b>MJ-1000B-BR Bearing</b>	 <b>JWK-8P 8" Poly Wheel</b>	 <b>MJ1000B-MK Bolt through mounting kit (For MJ-1200B &amp; MJ-1500B)</b>