

# Installation Instructions



## Euro Tail Light Guards

For proper installation and best possible fit, please read all instructions BEFORE you begin.

### Contents

NOTE: Actual product may vary from illustration.



(2) Tail Light Guards




(4) Small Diameter Screws



(4) Large Diameter Screws

### Tools Required



Philips Head Screwdriver


**1**

Remove the 4 factory screws securing the lens to the taillight.

Note: the (2) screws closest to the tailgate also secure the tail light assembly to the vehicle. Take care the assembly does not fall after removing the screws.

See **Figure 1**.

**Figure 1**

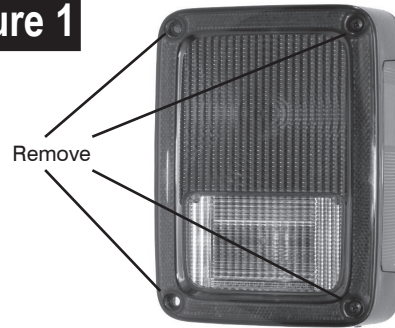

**2**

Using the provided Large Diameter Screws, attach the Tail Light Guard to the Tail Light at the two outer screw locations.

Then install the Small Diameter Screws through the light guard, through the tail light and into the pre-existing holes in the body.

The outer edge of the tail light has clips that hook to the sheet metal. Make sure they are properly engaged before installing the inner screws.

See **Figure 2**.

**Figure 2**



### Congratulations!



The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.



You have purchased one of the many quality Rampage branded products offered by Lund International. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

