



## Installation Instructions 69-1036

**IF YOUR ReadyLIFT® PRODUCT IS MISSING A OR HAS A DAMAGED PART, PLEASE CONTACT CUSTOMER SERVICE DIRECTLY. For warranty issues please return to the place of installation and contact ReadyLIFT® .**

**A NEW REPLACEMENT PART WILL BE SENT TO YOU IMMEDIATELY**

### Limited Lifetime Warranty

**This unique product warranty proves our commitment to the quality and reliability of every product that ReadyLIFT® manufactures. The ReadyLIFT® product warranty only extends to the original purchaser of any ReadyLIFT® product, if it breaks, we will give you a new part. Warranty does not apply to discontinued parts. Our Limited Lifetime Warranty excludes the following ReadyLIFT® items; bushings, bump stops, ball joints, tie rod ends, heim joints and shock absorbers. These parts are subject to wear and are not considered defective when worn. They are warranted for 12 months from the date of purchase for defects in workmanship. **This product warranty is voided if the vehicle is not aligned after kit installation and proper maintenance is routinely done.****

Product purchased directly from ReadyLIFT® has a 30 day return policy on uninstalled products from the date of purchase. Uninstalled product returns must be in the original ReadyLIFT® packaging. Customer is responsible for shipping costs back to ReadyLIFT®. **Returns without RGA# will be refused.** Contact ReadyLIFT® directly about any potentially defective parts prior to removal from vehicle. If the part in question is deemed warrantable an RGA# will be assigned and can be returned for repair or replacement. Replacement parts required prior to warranty claim completion must be purchased. Upon receipt and verification of deemed warranty parts claim, a credit or refund can then be processed to complete warranty claim transaction.

ReadyLIFT® products are **NOT** intended for off-road abuse. Any damage or failure as a result from off-road abuse voids the warranty of the ReadyLIFT® product. ReadyLIFT® is **NOT** responsible for any subsequent damages to any related vehicle parts due to misuse, abuse, improper installation, or lack of maintenance. Furthermore, ReadyLIFT® reserves the right to change, modify or cancel this warranty without prior notice.



## Installation Instructions 69-1036

**Please read Instructions thoroughly and completely before beginning installation.  
Installation by a certified mechanic is recommended.**

**ReadyLIFT® Suspension is NOT responsible for any damage or failure resulting from improper installation.**

**Safety Warning:** Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. Extreme care must be used to prevent loss of control or vehicle rollover during abrupt maneuvers. Always operate your vehicle at reduced speeds to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to driver and passengers. Driver and passengers must ALWAYS wear your seat belts, avoid quick sharp turns and other sudden maneuvers. ReadyLIFT® Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices. You should never operate your vehicle under the influence of alcohol or drugs. Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use. It is the responsibility of the retailer and/or the installer to review all state and local laws, with the end user of this product, related to bumper height laws and the lifting of their vehicle before the purchase and installation of any ReadyLIFT® products. It is the responsibility of the driver/s to check their surrounding area for obstructions, people, and animals before moving the vehicle. All raised vehicles have increased blind spots and damage, injury and/or death can occur if these instructions are not followed.

This suspension system was developed using a 35" x 12.50" tire with 20" x 9" wheel and a 0 offset. If wider tires are used, offset wheels may be necessary and trimming may be required. Factory wheels can be used but are not recommended with tires over 11" wide. The stock spare rim can be run in an emergency. Please note that if running the spare factory tire, it is done for short distances and a speed not to exceed 45mph or damage to differentials may occur.

### VEHICLE HEIGHT MEASUREMENTS

Driver Front:	Driver Rear:	Pass. Front:	Pass. Rear:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



SUSPENSION INC.

## Installation Instructions 69-1036

### BILL OF MATERIALS

Strut Extensions	2
M10 Flange Nut	6
Bump Stop Extension	2
Bump Stop Inner Plate	2
Bump Stop	2
M12 x 100mm Bolt	2
M12 Lock Nut	2
M12 Flat Washer	4
5/16" Lock Nut	2
5/16" Flat washer	2
Coil Spring Spacer	2
M12 x 35mm Bolt	2
M12 Lock Nut	2
M12 Flat Washer	4
Right Upper Control Arm	1
Left Upper Control Arm	1
Ball Joint	2
Ball Joint Spacer	2
Crush Sleeves	4
Control Arm Bushings	8
Grease Tube	2

### Safety Warning

**Before you start installation:**

ReadyLIFT® Suspension highly recommends that the installation of this product be performed by a professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results. If you need an installer in your area, please contact ReadyLIFT® Suspension customer service to find one of our "Pro-Grade" Dealers.

Notes:

- Installation by a professional mechanic is highly recommended.
- A Factory Service Manual for your specific Year / Make / Model is highly recommended for reference during installation.
- Vehicles with a two piece rear driveline may require a carrier bearing drop support bracket, call technical assistance for details.
- All lifted vehicles may require additional driveline modifications and or balancing.
- A four wheel vehicle alignment will need to be performed after installation of this product.
- Speedometer / Computer recalibration is required if changing +/- 10% from factory tire diameter.
- Use of a Vehicle Hoist will greatly reduce installation time.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

## Installation Instructions 69-1036

Park vehicle on a clean flat surface and block the rear wheels for safety. Engage the parking brake.

Record the stock vehicle measurements on both the front and the rear, this will provide a guideline on vehicle rake and lift height.

Measure from the center of the wheel up to the bottom edge of the fender well opening and record on the chart provided on page 2.

Disconnect the vehicle power source at the ground terminal on the battery.

Lock the steering wheel in the straight forward position with the column lock or steering wheel locking device.

Raise the front of the vehicle and support with jack stands at each frame rail behind the lower control arms.

### Repeat for both driver and passenger side

Remove the front wheels.

Remove the ABS clip from the upper control arm. (Fig 1)

Disconnect the ABS electrical connector at the splash shield.


Remove the brake line bracket at the frame and gently pull the metal brake line through to gain slack on the rubber line. (Fig 2)

Remove the sway bar end links from the sway bar. (Fig 3)

Remove the tie rod end from the knuckle. Strike the tie rod boss on the knuckle with a dead blow mallet to dislodge the taper. (Fig4)

Support the lower control arm with a suitable jack.

Loosen the upper ball joint nut. Strike the ball joint boss on the knuckle with a dead blow mallet to dislodge the taper. Once the taper is loose, remove the upper control arm. (Fig 5, 6)

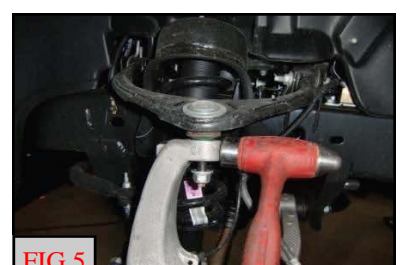

## Installation Instructions 69-1036

Remove the strut from the frame and control arm. (Fig 7,8)

Install the ReadyLift strut spacer using the **factory hardware**. Torque to **25 ft-lbs**.

Install the completed strut assembly into the vehicle using **10mm flange nuts** at the frame and **factory hardware** on the lower control arm. Do not tighten at this time. (Fig 9)

Remove the factory upper control arm from the frame. (Fig 10)

Install the ReadyLift control arm using the factory hardware. Do not tighten at this time. (Fig 11)

Install the ReadyLift upper control arm bump pad to the ReadyLift frame extension but do not tighten. The bump pad needs to be clocked once on the vehicle. Install the extension and back plate to the frame using **12mm x 100mm bolts, washers, and c-lock nuts**. Torque to **45 ft-lbs**. (Fig 12)

Raise the lower control arm up until the upper ball joint can be fully installed into the knuckle. Once seated properly, install the 1/4" thick spacer and castle nut onto the ball joint. Torque to **70 ft-lbs**. Insert cotter pin. Set the bump pad under the control arm so that it makes contact on the center of the tube. Torque to **10 ft-lbs**.

Install the tie rod end. Torque to **70 ft-lbs**.

Install the sway bar end link hardware. Torque to **30 ft-lbs**.

Install the brake line bracket. Torque to **5 ft-lbs**.

Connect the ABS harness electrical connector and install back into factory locations. Install clip onto ReadyLift control arm. (Fig 13)

Install the front wheels and lower the vehicle to the ground.

Jounce the front suspension to settle to ride height.



## Installation Instructions 69-1036

Torque the lower control arm mounts to **200 ft-lbs**, the upper control arm mounts to **120 ft-lbs**, the lower strut hardware to **90 ft-lbs**, and upper strut mount to **25 ft-lbs**.

### Rear Install

#### Repeat for both driver and passenger sides

Block the front wheels for safety.

Raise the rear of the vehicle and support with jack stands at each frame rail behind the lower control arms.

Support the axle with a suitable jack.

Remove the wheels.

Remove the ABS harness from the frame and brake lines. (Fig 14)

Remove the brake line bracket at the frame.

Remove the sway bar end links at the frame. (Fig 15)

Remove the shock at the axle. (Fig 16)

Loosen the track bar at the frame and axle. (Fig 17)

Loosen the upper and lower control arms at the frame and axle.

Lower the axle enough to remove the rear springs.

Install the ReadyLift coil spring spacers into the frame pocket using **M12 bolts, washers, and c-lock nuts**. Torque to **45 ft-lbs**. (Fig 18, 19)

Install the coil springs and raise axle enough to hold them in place. (Fig 20)

Install wheels and lower the rear of the vehicle to the ground. Torque the lug nuts to the wheel manufacturers specifications.



FIG 13



FIG 14



FIG 15



FIG 16



FIG 17



FIG 18

## Installation Instructions 69-1036

Jounce the vehicle to settle the suspension to ride height.

Install the lower shock mount using the **factory hardware**. Torque to **50 ft-lbs**.

Install the sway bar end links to the frame using the factory hardware. Torque to **45 ft-lbs**.

Install the brake lines onto the frame using the factory hardware. Torque to **5 ft-lbs**.

Install the ABS harness back into its original clips.

Torque the upper control arms to **120 ft-lbs**, the lower control arms to **200 ft-lbs**, and the track bar to **120 ft-lbs**.

Reconnect the ground terminal on the battery.

Have a reputable alignment shop set the alignment to the recommended specifications.

### **\*\*\*Final install and checks\*\*\***

Recheck that all hardware is of proper torque values and all electrical connections are hooked up. Start vehicle and verify that all dash warning lights are off. Cycle the steering wheel from lock to lock to check for any interference of steering intermediate shaft, steering extension, steering u-joint. wheels, tires, brake lines, hoses, wires, ect and ensure adequate clearance through out the suspension cycle. Adjust as necessary.

Install all warning tags and decals as directed:

1. Rear view mirror hanging warning card: Hang from rear view mirror to warn driver of vehicle modification.
2. Lifted truck warning decal: Apply decal to the upper left hand corner of the inside of the windshield facing the driver.

Give all installation instructions, warranty information, and all remaining literature to the end user to keep with vehicle records.





**Installation Instructions 69-1036**

**Final Checks & Adjustments**

**Post Installation Warnings:** Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to insure proper torque. Torque wheels to factory specs. Move vehicle backwards and forwards a short distance to allow suspension components to adjust. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance. Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes hoses and ABS lines for adequate slack at full extension.

**\*\*\*FAILURE TO PERFORM THE POST INSPECTION CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND/OR PERSONAL INJURY OR DEATH TO THE DRIVER AND/OR OTHERS\*\*\***

**Vehicle Handling Warning:** Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle.

**Wheel Alignment/Headlamp Adjustment:**

**It is necessary to have a proper and professional wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to your vehicle alignment, for your safety and others, it is necessary to check and adjust your vehicle headlamps for proper aim and alignment**

**Vehicle Re-Torque and Safety Inspection:**

Upon completion of all services and adjustments performed on your vehicle, and within 50 miles of driving, check to ensure all fasteners and hardware are properly torqued to specification as noted in the vehicles factory service manual or the torque chart included.

**\*\*\*RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT THE EACH SERVICE INTERVAL THERAFTER.\*\*\***

Recommended Alignment Specs

<b>Camber</b>	<b>-0.3</b>	<b>-0.3</b>	<b>Tolerance</b>	<b>+/- 0.5</b>
<b>Caster</b>	<b>+3.5</b>	<b>+3.5</b>	<b>Tolerance</b>	<b>+/- 0.5</b>
<b>Toe</b>	<b>+1.0</b>	<b>+1.0</b>	<b>Total</b>	<b>+20</b>