BACKUP CAMERA SYSTEM WITH TRAILER TOW QUICK CONNECT KIT RVS - 770613 - 213





This backup camera system is perfect for the fifth wheel application. The system is complete with a crystal clear 7" LED Digital Panel Color monitor with mirror image capability and distance grid lines, a 3 channel power harness with automatic system switch, one 130° Sharp®CCD camera with 50 foot infra-red night vision and all the wires, connectors and mounts you will need. The 5th wheel rear view camera system is completely weather proof with an IP69K rating. The quick connect/disconnect cable is 66' to camera, 26' to monitor with a 12' pigtail. The system is strong and reliable with a camera that boasts a 20G vibration and 100G impact rating (highest in the industry). It comes with a full year warranty.

BACKUP CAMERA SYSTEM WITH TRAILER TOW QUICK CONNECT KIT RVS - 770613 - 213



- COMPLETELY WEATHERPROOF WITH AN IP69K RATING
- 7" LED DIGITAL PANEL COLOR MONITOR WITH REMOVABLE SUNSHADE
- 2.5 MM COLOR CCD CAMERA WITH A 130° VIEWING ANGLE
- 3 CHANNEL SYSTEM ALLOWING YOU TO CONNECT ADDITIONAL CAMERAS
- SHOCK RESISTANT WITH A 20G VIBRATION AND 100G IMPACT RATING



MONITOR

PANEL SIZE DOT RESOLUTION SCREEN MODE **CONTRAST RATIO** DISPLAY BRIGHTNESS FIELD OF VIEW **CAMERA INPUT VIDEO SOURCE POWER SUPPLY** POWER CONSUMPTION **AUDIO OUTPUT** OPERATING TEMPERATURE STORAGE TEMPERATURE VIDEO SYSTEM **OVERALL DIMENSIONS** WEIGHT VIBRATION RATING DOT PITCH **ACTIVE AREA** SYNC SYSTEM


7"LED DIGITAL PANEL 800 X 3 (RGB) X 480 16:09 500:01:00 400CD/m U:50° D:60° L/R:70° 3 CHANNEL CVBS 1VP-P, 75Ω DC 9V-32V **5W** 0.5W SPEAKER -20°C ~ +70° C -30°C ~ +85°C AUTO NTSC/PAL 7" (L) X 5" (H) X 1" (D) 400G 5G 0.1926 (H) X 0.1710 (V) 154.08(H) X 85.92(V) MM INTERNAL

CAMERA

SENSOR
PICTURE ELEMENTS
GAMMA CORRECTION
IMAGE SENSOR
PIXELS

LENS
VIEW ANGLE
WATERPROOF RATING
SYNC SYSTEM
INFRA-RED DISTANCE
USABLE ILLUMINATION
POWER SOURCE
S/N RATIO
ELECTRONIC IRIS
VIDEO OUTPUT
IR SWITCH CONTROL
VIBRATION AND IMPACT RATING
OPERATING TEMPERATURE
STORAGE TEMPERATURE
NET WEIGHT

1/3" SHARP* COLOR CCD 410,000 PIXELS R=0.45 TO 1.0 620 TV LINES PAL: 752 (H) X 582 (V) NTSC: 811(H) X 507 (V) 2.5MM 130° IP69K INTERNAL SYNCHRONIZATION 50 FEET (18 INFRARED) 0 LUX (IR ON) DC 9V-32V MORE THAN 48DB 1/50, 160-1/100,000SEC 1VP - P, 75 Ω ACDS AUTOMATIC CONTROL 20G / 100G -40°C ~ +70°C / RH 95% MAX -40°C ~ +85°C / RH 95% MAX 220Z





BACKUP CAMERA

This 1/3" Sharp® CCD Color Camera is built with heavy duty zinc metal which encases the 2.5 mm Sharp® lens. It has a viewing angle of 130 degrees and 620 TV lines, which means you get the best quality image with no blind spots. The 18 Infra-Red lights allow you to see up to 50 feet even in the darkest of night and the foam around the lens guarantees no glare from these Infra-Reds. With an IP69K rating, this camera is fit to ride out any storm and boasts a 20G vibration rating. This device comes equipped with Aircraft Grade cable connections.




WIDESCREEN MONITOR

Our 7" LED Digital Panel Color Monitor comes with a Super Sharp Digital Display and a pixel resolution of 800 X3 (RGB) x 480.

The distance grid lines that come standard with these monitors are optional and adjustable.

It has built-in speakers, and its menu can be navigated with the on dash buttons or with the remote, which comes included.

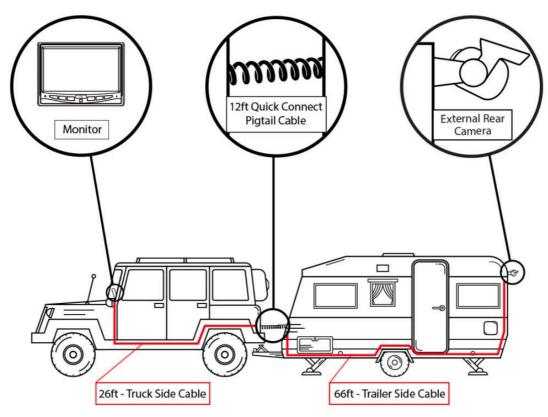

Learn more about other cameras & driver safety products by Rear View Safety on our website.