G - SERIES BACKUP CAMERA SYSTEM FOR DODGE

RVS - 776718 - DODGE





This Backup Camera System comes with a 718 Mirror Monitor made with a mounting bracket specific for Dodge vehicles. This monitor will fit easily onto the windshield of all Dodges without any adjustments needed. Paired with the monitor in this system is the 776 Camera which despite its small size is powerfully built to withstand all weather conditions. The G-Series monitor replaces the existing rear view mirror for a clean look. Its screen is 4.3 inches wide and pushed to the left of the mirror to be more easily viewed by the driver. For an absolute perfect backing up experience, this monitor comes with adjustable grid lines, allowing you to adjust the grid lines to be completely accurate regardless of where you mount the camera. It is controlled with illuminated touch screen buttons.

The backup camera in this system is surface mounted and can fit almost any vehicle. This slick compact design makes the camera virtually invisible. The camera has an IP68 rating which makes it completely weatherproof and boasts excellent night vision. This system comes included with all parts necessary for installation.

Note: Monitor is specific for Dodge vehicles from 2012 onwards.

G - SERIES BACKUP CAMERA SYSTEM FOR DODGE RVS - 776718 - DODGE



- COMPLETELY WEATHERPROOF WITH AN IP68 RATING
- OEM FACTORY LIKE MIRROR MONITOR REPLACES EXISTING REAR VIEW MIRROR
- SUPER BRIGHT 4.3"TFT LCD COLOR SCREEN
- MT9V139 COLOR CAMERA WITH A 170° VIEWING ANGLE
- SHOCK RESISTANT WITH A 10G VIBRATION AND A 100G IMPACT RATING
- 2 CHANNEL SYSTEM ALLOWING YOU TO CONNECT AN ADDITIONAL CAMERA



MONITOR

SCREEN SIZE
DOT RESOLUTION
DISPLAY FORMAT
DISPLAY BRIGHTNESS
VIEWING ANGLE
VIDEO INPUT
VIDEO SOURCE
POWER SUPPLY
POWER CONSUMPTION
OPERATING TEMPERATURE
VIDEO SYSTEM
OVERALL DIMENSIONS
WEIGHT
IMPACT RATING
SYNC SYSTEM

4.3"
480 X 3 (RGB) X 272
16:9
12001X
U&D: 100°, L&R: 120°
2 CHANNEL
1VP - P, 75 Ω
DC 9V - 32V
8W
-20 °C ~ +75 °C
AUTO NTSC / PAL
10.55" (L) X 3.15" (H) X 1" (D)
800G
5G
INTERNAL

CAMERA

SENSOR


SENSOR FORMAT PICTURE ELEMENTS NTSC OUTPUT PAL OUTPUT OPTICAL FORMAT GAMMA CORRECTION **IMAGE SENSOR** LENS VIEW ANGLE WATERPROOF RATING SYNC SYSTEM NIGHT VISION USABLE ILLUMINATION POWER SOURCE S/N RATIO **ELECTRONIC IRIS** VIDEO OUTPUT VIBRATION AND SHOCK RATING 10G / 100G OPERATING TEMPERATURE STORAGE TEMPERATURE

728 (H) X 560 (V) 307,200 PIXELS 720 (H) X 480 (V) 720 (H) X 576 (V) 1/4 INCH R=0.45 TO 1.0 480 TV LINES 2.1MM 170° **IP68** INTERNAL SYNCHRONIZATION YES 0.5 LUX DC 9V - 32V MORE THAN 48DB 1/50, 160-1/100,000SEC 1VP - P, 75 Ω -40°C ~ +70°C / RH 95% MAX -40°C ~ +80°C / RH 95% MAX

MT9V139



Installation Time:

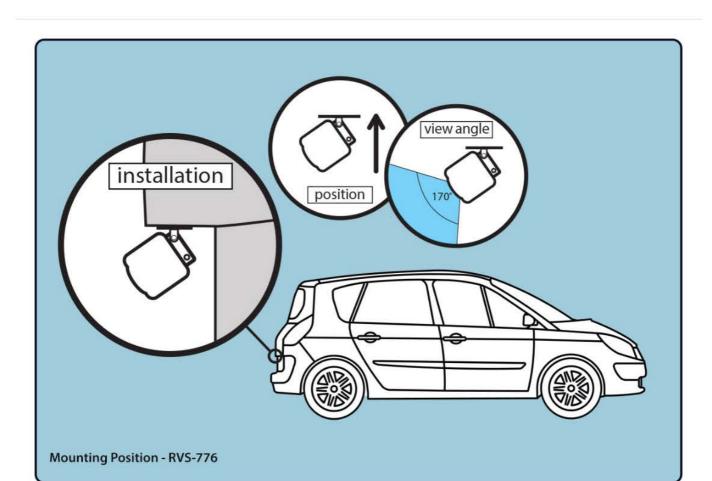

Mirror Monitor

Our G-Series monitor completely replaces your rear view mirror. In addition to having a high quality display, the entire surface is an ultra reflective mirror.



Reflective

Acts just like a regular rear view mirror monitor



Super Sharp Digital Image With a pixel resolution of 480×272 the monitor guarantees a super sharp digital image



 $\hbox{\bf 4.3" LCD Digital Display} \\ \hbox{\bf A bright 4.3" display appears on the left side of the mirror when camera is triggered on }$



Distance Grid Lines

The monitor will display grid lines for reference of distance to obstacles behind you



Adjustable Easily adjust mirror monitor to any position with a double ball joint



