

G - SERIES BACKUP CAMERA SYSTEM WITH BACKUP SENSORS

RVS - 776718 - PS

REAR VIEW
SAFETY
A Safe Fleet Brand



Sensors and a backup camera. Now that's a good way to protect your vehicle! Both the sensors and backup camera with this system connect to the replacement mirror monitor which attaches straight to the vehicle's windshield. This mirror monitor is reflective and will act as a rear view mirror, display the backup camera and alert you audibly from the backup sensors. What a way to stay safe!

G - SERIES BACKUP CAMERA SYSTEM WITH BACKUP SENSORS



A Safe Fleet Brand

RVS - 776718 - PS

- COMPLETELY WEATHERPROOF WITH AN IP68 RATING
- OEM FACTORY - LIKE MIRROR MONITOR REPLACES EXISTING REAR VIEW MIRROR
- SUPER BRIGHT 4.3" TFT LCD COLOR SCREEN
- MT9V139 COLOR CAMERA WITH A 170° VIEWING ANGLE
- SHOCK RESISTANT WITH A 20G VIBRATION AND A 100G IMPACT RATING



MONITOR

SCREEN SIZE	4.3"
DOT RESOLUTION	480 X 3 (RGB) X 272
DISPLAY FORMAT	16:9
DISPLAY BRIGHTNESS	12001X
VIEWING ANGLE	U&D: 100°, L&R: 120°
VIDEO INPUT	2 CHANNEL
VIDEO SOURCE	1VP - P, 75 Ω
POWER SUPPLY	DC 9V - 32V
POWER CONSUMPTION	8W
OPERATING TEMPERATURE	-20 °C ~ +75 °C
VIDEO SYSTEM	AUTO NTSC / PAL
OVERALL DIMENSIONS	10.55" (L) X 3.15" (H) X 1" (D)
WEIGHT	800G
IMPACT RATING	5G
SYNC SYSTEM	INTERNAL

CAMERA

SENSOR	MT9V139
SENSOR FORMAT	728 (H) X 560 (V)
PICTURE ELEMENTS	307,200 PIXELS
NTSC OUTPUT	720 (H) X 480 (V)
PAL OUTPUT	720 (H) X 576 (V)
OPTICAL FORMAT	1/4 INCH
GAMMA CORRECTION	R=0.45 TO 1.0
IMAGE SENSOR	480 TV LINES
LENS	2.1MM
VIEW ANGLE	170°
WATERPROOF RATING	IP68
SYNC SYSTEM	INTERNAL SYNCHRONIZATION
NIGHT VISION	YES
USABLE ILLUMINATION	0.5 LUX
POWER SOURCE	DC 9V - 32V
S/N RATIO	MORE THAN 48DB
ELECTRONIC IRIS	1/50, 160-1/100,000SEC
VIDEO OUTPUT	1VP - P, 75 Ω
VIBRATION AND SHOCK RATING	10G / 100G
OPERATING TEMPERATURE	-40°C ~ +70°C / RH 95% MAX
STORAGE TEMPERATURE	-40°C ~ +80°C / RH 95% MAX

QUICK FACT

Installs cleanly in vehicle for a factory-like finish.

STRONG

System usually outlives the vehicles they are mounted on

3h

Installation Time: 3 hours

170° Viewing Angle

Ultra wide angle



Night Vision

Provides a great picture at night



Adjustable Mounting Bracket




Compact Design

Less than an inch in length, width and depth

IP68 Rating

Protected against complete submersion in water

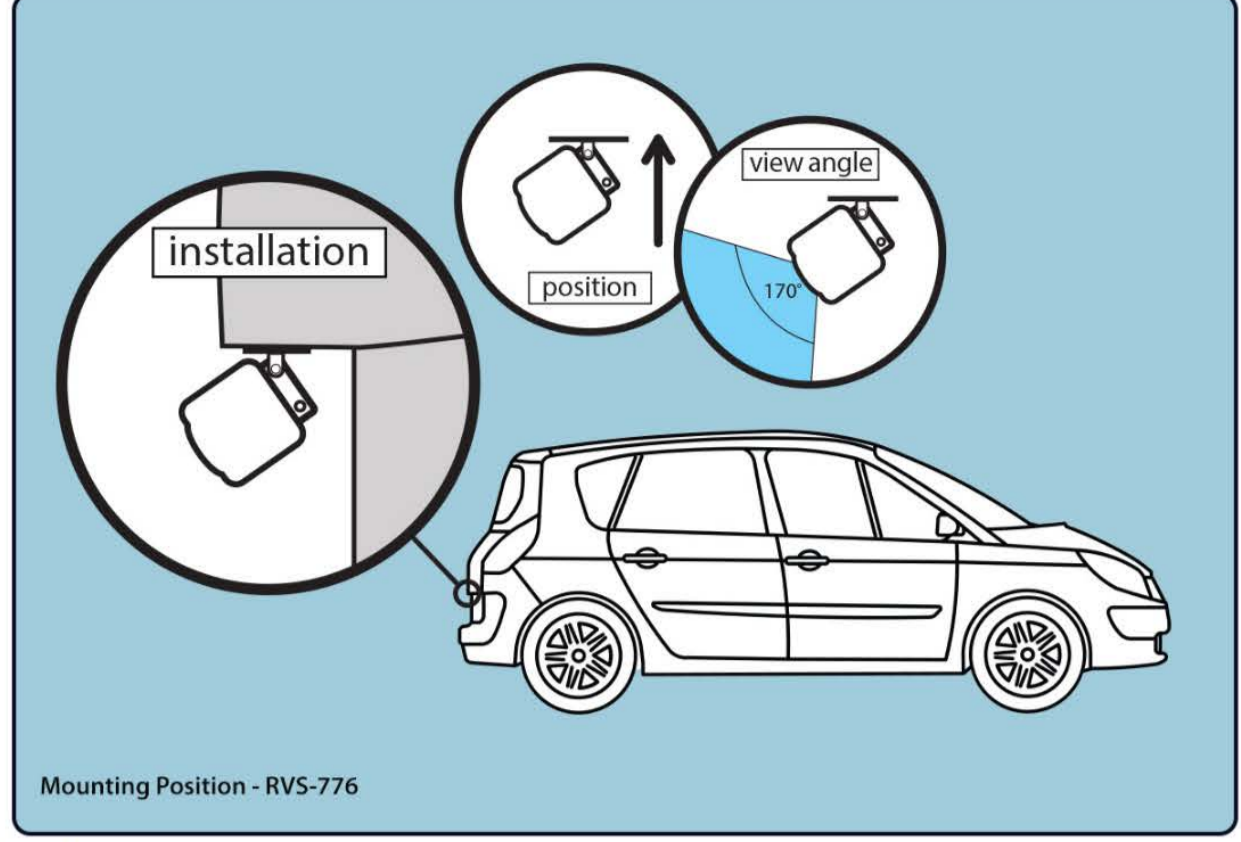

Mounting Position - RVS-776

Mirror Monitor

Our G-Series monitor completely replaces your rear view mirror. In addition to having a high quality display, the entire surface is an ultra reflective mirror.



Reflective

Acts just like a regular rear view mirror monitor



Sensor Overview

Four backup sensors alert you audibly and visually to objects behind you




Detection Area

The audio pulse intensity increases as the vehicle backs closer to the obstacle



Sensor Distance

Visual and aural alarms alert you to approaching objects

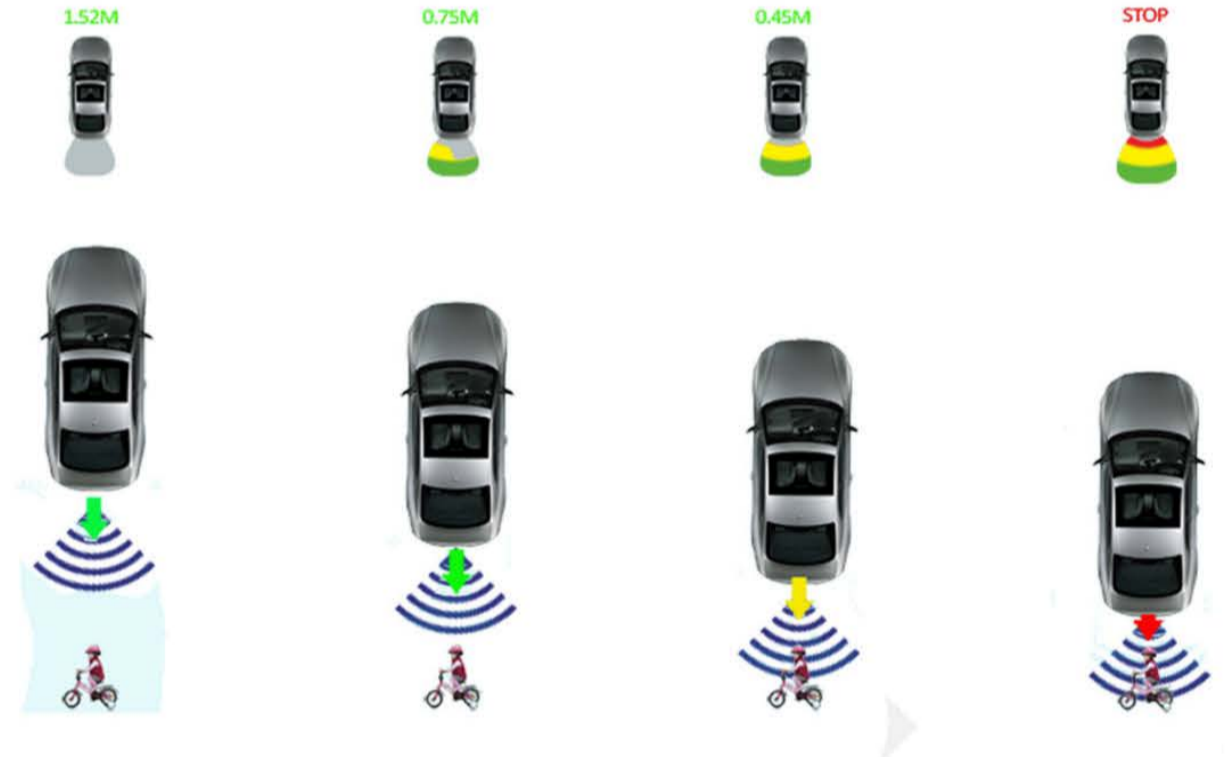

Super Sharp Digital Image

With a pixel resolution of 480 x 272 the monitor guarantees a super sharp digital image



4.3" LCD Digital Display

A bright 4.3" display appears on the left side of the mirror when camera is triggered on



Distance Grid Lines

The monitor will display grid lines for reference of distance to obstacles behind you



Adjustable

Easily adjust mirror monitor to any position with a double ball joint



Clean Install

The beauty of the G-Series is how well it seamlessly integrates into your vehicle for a sleek OEM look



Adapters For All Vehicle Types



Learn more about other cameras & driver safety products by Rear View Safety on our website.