

Installation Instructions

Mitsubishi Outlander


(Except Sport)

Part Numbers:

75555

44579

87444

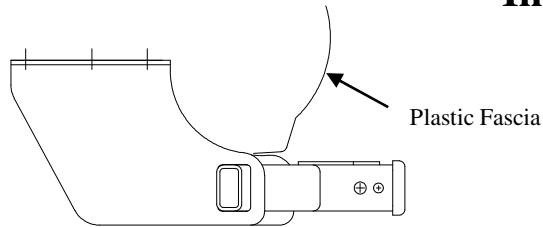

Do Not Exceed Lower of Towing Vehicle
Manufacturer's Rating or

Hitch type	Max Gross Trailer WT (LB)	Max Tongue WT (LB)
Weight Distributing	4000 (1816 Kg.)	400 (182 Kg.)
Weight Carrying Ball Mount	4000 (1816 Kg.)	400 (182 Kg.)

Hitch Shown In Proper Position


Equipment Required:

Fastener Kit: 75555F

Wrenches: 17mm, 3/4"

Drill Bits: None

Wiring Access Location: SUV3, SUV4

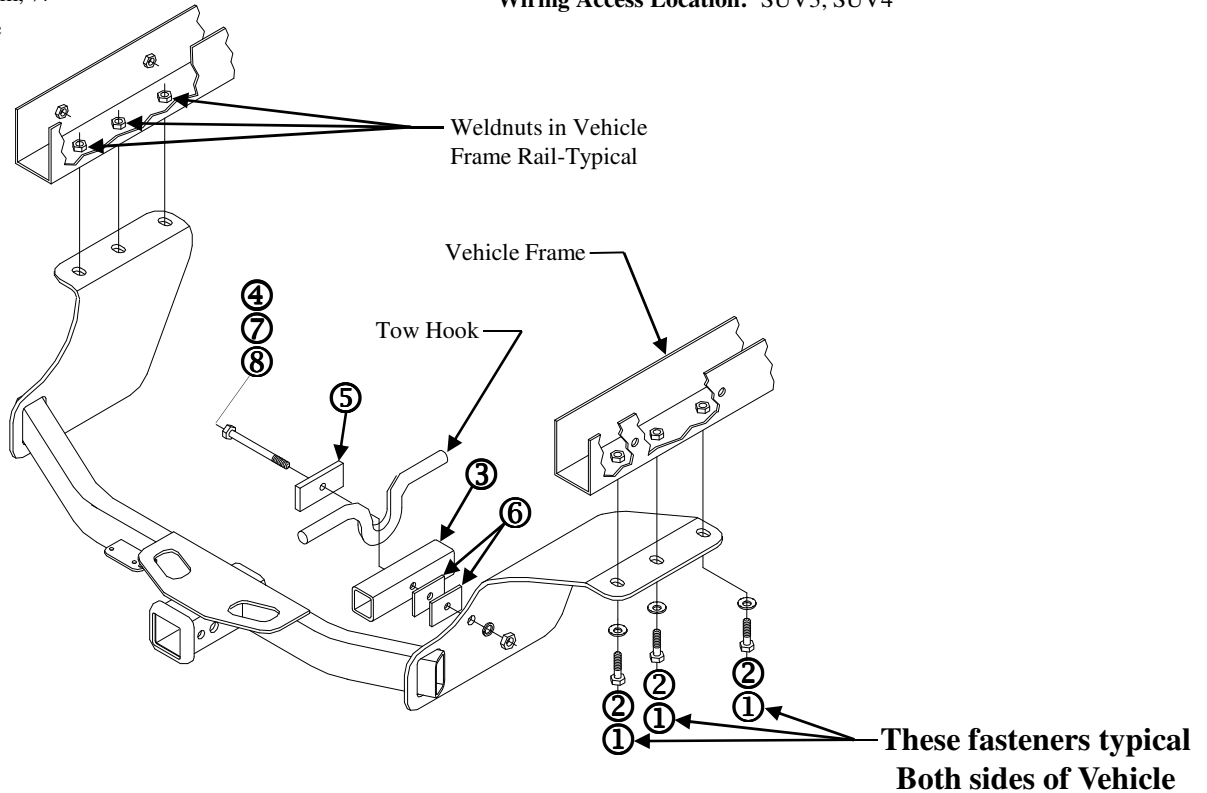

①	Qty. (6)	Hex Bolt – M10 x 1.25 x 40mm CL8.8	⑤	Qty. (1)	Block – 3/8 x 1-1/2 x 3
②	Qty. (6)	Conical Washer – 3/8"	⑥	Qty. (2)	Block – 3/16 x 1-1/2 x 2
③	Qty. (1)	Tube Spacer	⑦	Qty. (1)	Lockwasher – 1/2"
④	Qty. (1)	Hex Bolt – 1/2-13 x 4.00 GR5	⑧	Qty. (1)	Hex Nut – 1/2-13

- Lower exhaust by disconnecting (3) rubber exhaust hangers from muffler, (2) at the front and (1) at the rear of the muffler.
Note: If additional clearance is needed, disconnect muffler from exhaust pipe by removing (2) bolts forward of muffler. Retain bolts for re-installation.
- Raise hitch into position, installing fasteners as shown into existing weldnuts in vehicle frame.
- Install tube spacer, blocks and 1/2-13 x 4" lg. hex bolt thru tow hook and into hole in hitch bracket as shown.
Tighten all M10 x 1.25 CL8.8 fasteners with torque wrench to 42 Lb.-Ft. (57 N*M)
Tighten all 1/2-13 GR5 fasteners with torque wrench to 75 Lb.-Ft. (102 N*M)
- Raise exhaust back into position by re-connecting rubber exhaust hangers (re-attach muffler to exhaust pipe if removed in step 1).
Tighten all M10 x 1.25 CL8.8 fasteners with torque wrench to 42 Lb.-Ft. (57 N*M)
Tighten all 1/2-13 GR5 fasteners with torque wrench to 75 Lb.-Ft. (102 N*M)

Note: check hitch frequently, making sure all fasteners and ball are properly tightened. If hitch is removed, plug all holes in trunk pan or other body panels to prevent entry of water and exhaust fumes. A hitch or ball which has been damaged should be removed and replaced. Observe safety precautions when working beneath a vehicle and wear eye protection. Do not cut access or attachment holes with a torch.

This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New York, V.E.S.C. Regulation V-5 and SAE J684.