

RSR/Cup Heater Fan Delete Kit

94-98 993 - Normally Aspirated

Check to make sure you that have all parts listed prior to installation. If anything is missing contact us immediately.

- (1) Perforated fan block off plate
- (1) Heat Duct block off plate
- (4) S/S Button Head Cap Screws 1/4-20 X.875" - MC92949A541
- (4) S/S Washers 1/4"- MC98017A660
- (4) S/S Nyloc Nuts 1/4"-20 - MC91831A029
- (4) 4" Zip Ties



Photo 1

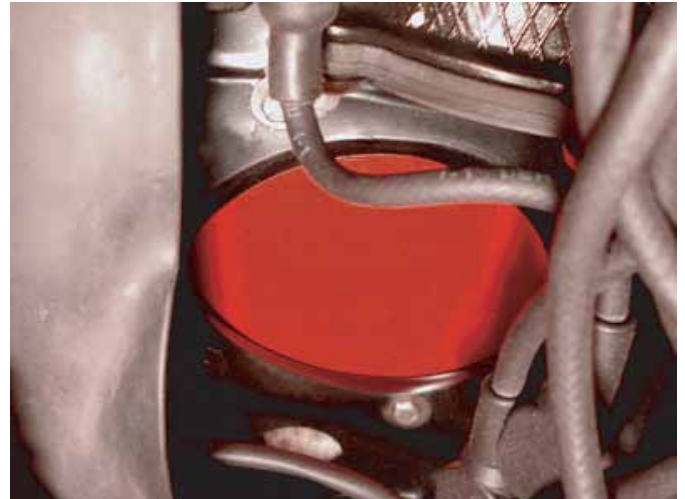


Photo 2

- Step 1 - Remove hetaer fan assembly and duct work from engine bay.
- Step 2 - Insert perforated fan block off plate into the rubber fan housing as shown in photo 1.
- Step 3 - If the car was equipped with a rubber vent line on the fan housing, insert tube into the perforated plate as shown.
- Step 4 - Using the supplied bolts, washers and nuts , Attach the lower duct block off plate as shown in photo 2.
- Step 5 - Using the supplied zip ties, wrap up and secure any wires or sensors that were originally attached to the blower assembly and are no longer used.