



DK211 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.


Placement of pads:

- Pad M505, FRONT Left of vehicle, Arrow facing outward.
- Pad M506, FRONT Right of vehicle, Arrow facing outward.
- Pad M505, REAR Right of vehicle, Arrow facing outward.
- Pad M506, REAR Left of vehicle, Arrow facing outward.


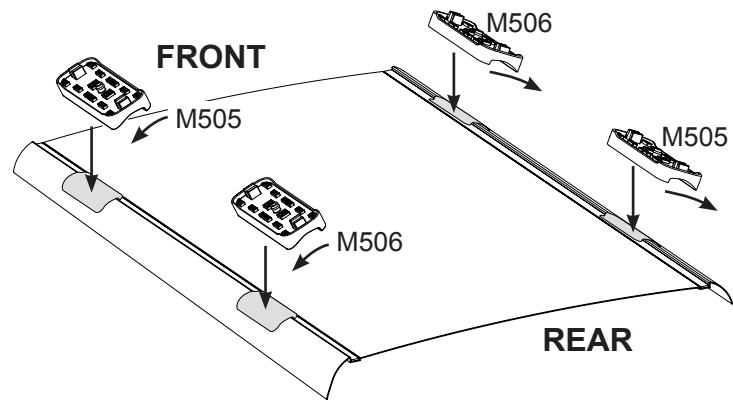


Pad orientation:

Arrows on all pads face to outside of vehicle when installed.
(Underside of pads shown).

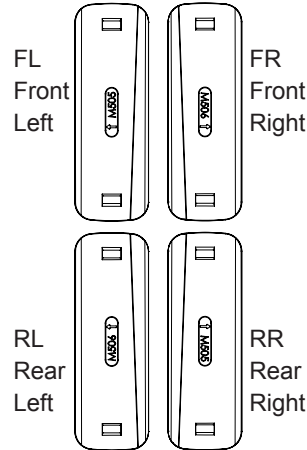

Direction of Pad, Arrow and Foot Plates

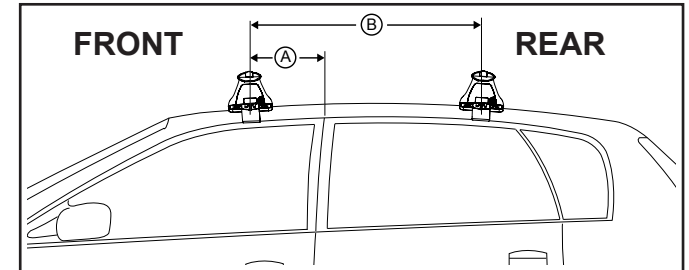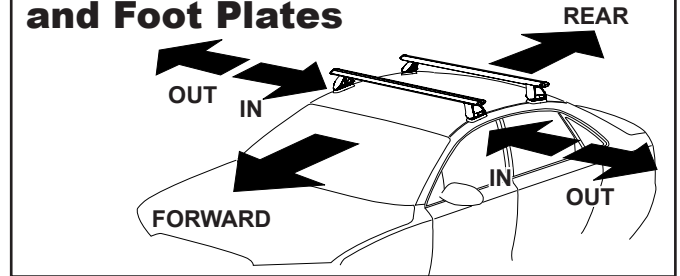

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Infiniti G 4dr sedan	2007-13	210mm / 8,17/64"	670mm / 26,3/8"	60kg / 132lbs