



DK225 Rhino-Rack VA, Aero, Euro & HD crossbar instruction




Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

Fitting note.

- Pad M503, FRONT Left of vehicle - Arrow facing outward.
- Pad M504, FRONT Right of vehicle - Arrow facing outward.
- Pad M503, REAR Right of vehicle - Arrow facing outward.
- Pad M504, REAR Left of vehicle - Arrow facing outward.

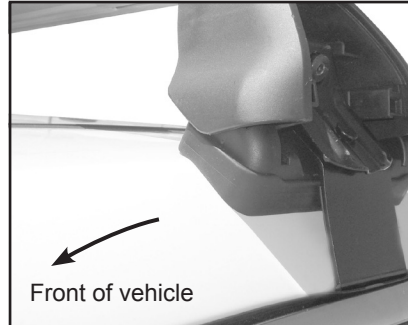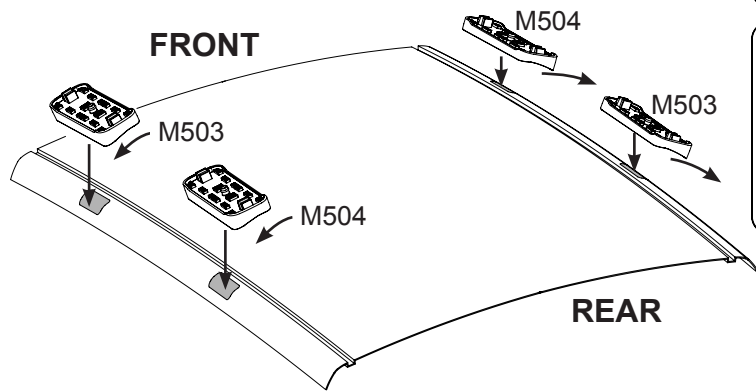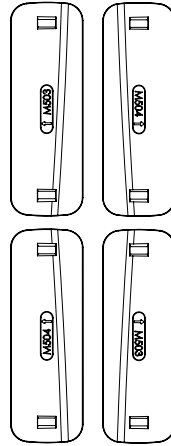


Front of vehicle


Fitting note.

Front left pad M503 shown in position.

Direction of Pad, Arrow and Foot Plates

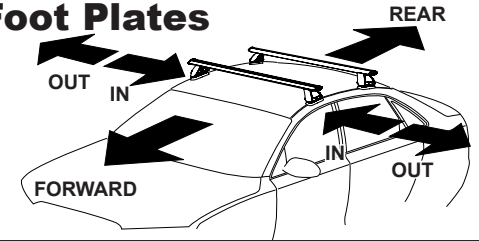

FRONT REAR

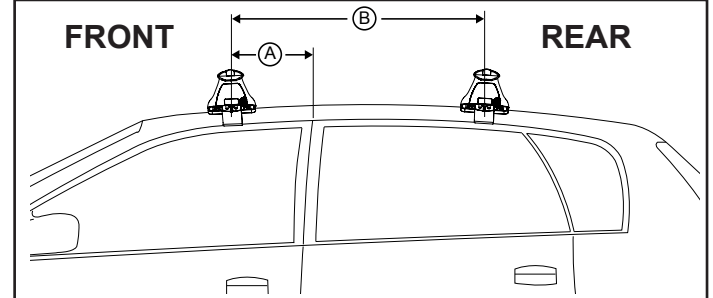

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Buick LaCrosse 4dr sedan	2010 on	120mm / 4,23/32"	700mm / 27,9/16"	60kg / 132lbs
GMC Terrain SUV	2010 on	150mm / 5,29/32"	700mm / 27,9/16"	60kg / 132lbs