


			IDENTIFICATION CHART			VA crossbar			EURO crossbar			HD crossbar		
			and a second		FRONT		L HD	A CONTRACTOR	and a second		REAR C	ROSSBAR	L HD	Contraction of the second
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Ford F150 SuperCrew	2015 -	1500mm	M700 SUB0149	M699 SUB0149	169mm	114mm	1226mm /	OUT	M700 SUB0149	M699 SUB149	166mm	111mm	1220mm /	OUT
			Pad Arrow FORWARD				48,17/64"		Pad A FORV				48,1/32"	
Ford F150 SuperCab	2015 -	1500mm	M700 SUB0149	M699 SUB0149	169mm	114mm	1226mm /	OUT	M700 SUB0149	M699 SUB149	166mm	111mm	1220mm /	OUT
			Pad Arrow FORWARD				48,17/64"		Pad Arrow FORWARD				48,1/32"	
				L										



Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

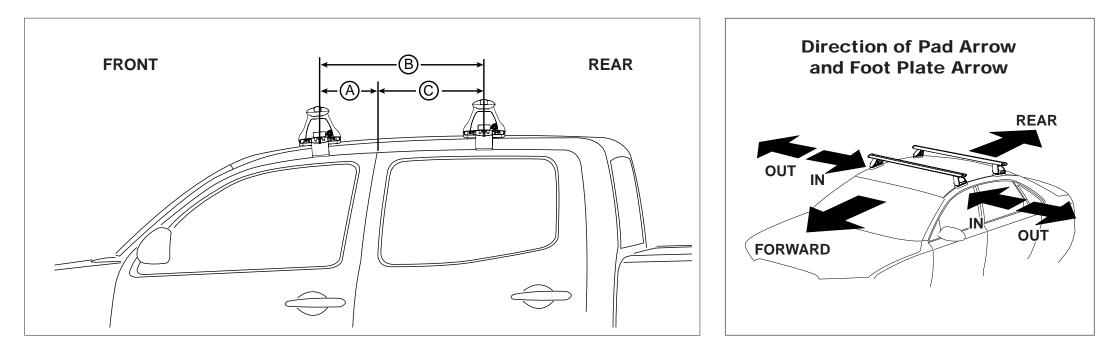

VEHICLE	Date	Measurement A	Measurement B	Measurement C	Load Rating (includes racks 5kg/ 11lbs)	
Ford F150 SuperCrew	2015 -	280mm / 11,1/32"	800mm / 31,1/2"	520mm / 20,15/32"	75kg / 165lbs	
Ford F150 SuperCab	2015 -	280mm / 11,1/32"	700mm / 27,9/16"	420mm / 16, 9/16"	75kg / 165lbs	