




Directions For: Car Top Carrier Cable Lock

Run the Car Top Carrier Cable Lock through the zipper pulls of a cargo bag (Fig 1) and secure the bag to the vehicle's roof rack (Fig 2). The Cable Lock can also be run through the zipper pulls of the Cargo Saddlebag.

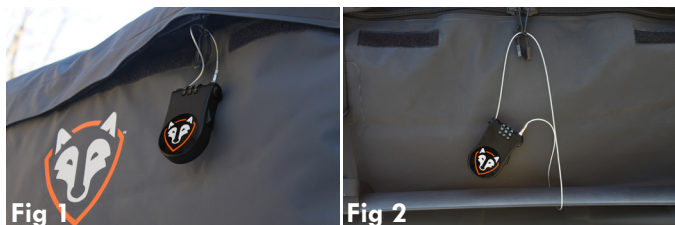

To ensure a trouble-free experience, please read through the directions before attempting to set the lock's combination.



To Set The Combination:

1-Align the pre-set combination (0-0-0) across the top of the lock.

2-Press the cable trigger to fully retract the cable.

3-Hold the reset button and set your new combination.

4-Release the reset button to save your new combination.

WARNING: Beware of accidental combination change. You will not be able to use or reset the lock if you do not know the current combination.

To Lock:

1-Align your combination across the top of the lock.

2-Press the cable trigger and pull out the cable.

3-Press in and hold the lock button.

4-Insert the cable head into the cable hole and release the lock button.

5-Scramble the combination.

6-Press the cable trigger to remove extra slack in the cable.

Make sure the lock is positioned so that it will not contact the roof of your vehicle while in transit.

To Unlock:

1-Align your combination across the top of the lock.

2-Press the lock button and pull out the cable head from the cable hole.

3-Press the cable trigger to retract the cable into the lock's body.