




# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**

KS

ROADMASTER, Inc.

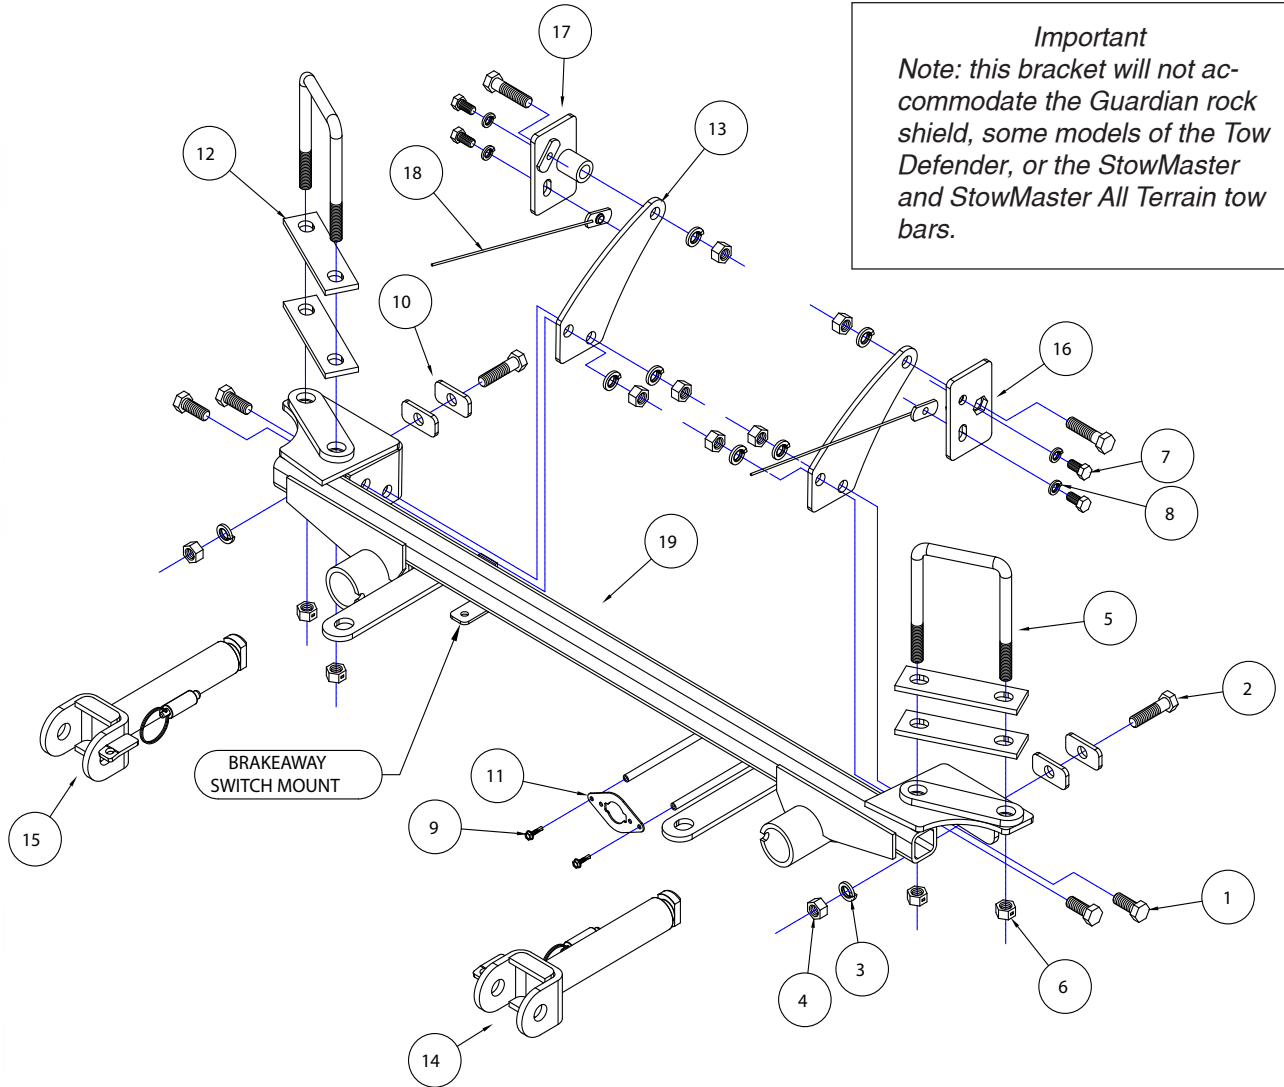

ITEM	QTY	NAME	PART #
1	4	1/2" x 1 1/4" BOLT	350094-00
2	4	1/2" x 2" BOLT	350097-00
3	8	1/2" LOCK WASHER	350309-00
4	8	1/2" HEX NUT	350258-00
5	2	1/2" x 3 1/2" x 5 1/2" U-BOLT	357021-50
6	4	1/2" TWO WAY LOCK NUT	350258-20
7	4	3/8" x 3/4" BOLT	350053-00
8	4	3/8" LOCK WASHER	350305-00
9	2	#10 x 3/4" SELF DRILLING SCREW	350247-35
10	4	1" x 2" BACKING PLATE	A-000842
11	1	WIRE PLUG PLATE	A-003801
12	4	U-BOLT SPACER PLATE	A-005452
13	2	REAR MOUNTING PLATE	A-005453
14	1	DRIVER SIDE ARM	C-002383
15	1	PASSENGER SIDE ARM	C-002384
16	1	DRIVER SIDE REAR BRACKET	C-003134
17	1	PASSENGER SIDE REAR BRACKET	C-003135
18	2	3/8" WELDNUT WITH ROD	C-003138
19	1	MAIN RECEIVER	C-003139



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**

KS

ROADMASTER, Inc.

This is one of our EZ5 series brackets, which allows the visible front portion of the bracket to be easily removed from the front of the vehicle (Fig.A and Fig.B). The bracket consists of a main receiver brace, two removable front braces, and a hardware pack.

The main receiver brace mounts to the bumper core. The removable front braces install in the main receiver brace.

Before starting the installation, lay out the kit components in order, as they will be used. This will give you a visual idea of how the components work, and will also confirm that everything is present and accounted for.



**IMPORTANT:** All brackets **must** be assembled with all the bolts left loose for final adjustment and positioning (before tightening) unless otherwise instructed. All bolts **must** be torqued for proper strength. If more than one bolt is used per fastening point, the diagram may only show one.

- Use flat washers over all slotted holes
- Use lock washers on all fasteners

ROADMASTER Limited Warranty, including One-Year Conditional Warranty Text and Product Registration Card, in Carton.

## WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.

- Installation of most mounting brackets requires moderate mechanical aptitude and skills. We strongly recommend professional installation by an experienced installer.
- The installer must read the instructions and use all bolts and parts supplied. Failure to do so could result in loss of the towed vehicle.
- Use Loctite® Red on all bolts used for mounting this bracket.
- Every 3,000 miles, the owner must inspect the fasteners for proper torque, according to the bolt torque requirements chart on the last page of these instructions. The owner must also inspect all mounts and brackets for cracks or other signs of fatigue every 3,000 miles. Failure to do so could result in loss of the towed vehicle.
- The owner must check the vehicle manufacturer's instructions for the proper procedure(s) to prepare the vehicle for towing. Some vehicles must be equipped with a transmission lube pump, an axle disconnect, driveline disconnect or free-wheeling hubs before they can be towed. Failure to properly equip the vehicle will cause severe damage to the transmission.
- If running changes were made by the vehicle manufacturer after this bracket was designed, some bolts or other fasteners in the hardware pack may no longer be the correct size. It is the installer's responsibility to verify that the bracket is securely fastened to the vehicle and fitted with the correct hardware to account for these changes. Failure to securely fasten the bracket could result in loss of the towed vehicle.
- If the towed vehicle has been in an accident, it must be properly repaired before attaching the bracket. Do not install the bracket if any structural frame damage is found. Failure to repair the damage could result in the loss of the towed vehicle.
- Roadmaster manufactures many styles of brackets. If your bracket has removable arms, they must be removed before driving the vehicle, unless the arms can be pinned or padlocked in place. If not secured, the arms could vibrate out, resulting in non-warranty damage or personal injury.
- Some motorhome chassis have such a tight turning radius that you can damage your motorhome, towed vehicle, tow bar or bracket while turning sharply. Before getting on the road, test your turning radius in an empty parking lot. Turning too sharply could result in non-warranty damage to towing system, motorhome and/or towed vehicle.
- Do not back up with the towed vehicle attached or non-warranty damage will occur to your towing system, motorhome and/or towed vehicle.
- The safety cables must connect the towing vehicle to the towed vehicle frame to frame, with the cables crossed, with enough slack for sharp turns. Refer to the cable instructions for proper routing. Failure to leave enough slack in the safety cables, or failure to connect the safety cables frame to frame, will result in the loss of the towed vehicle.
- This bracket is designed for use with ROADMASTER tow bars and ROADMASTER adaptors only. Using this bracket with other brands, without an approved ROADMASTER adaptor, may result in non-warranty damage or injury.
- Do not use this document for custom fabrication, as it may not show all parts or structural components. Custom fabrication or an attempt to copy this bracket design could result in loss of the towed vehicle.
- Upon final installation, the installer must inspect the bracket to ensure adequate clearance, particularly around hoses, air conditioner lines, radiators, etc., or non-warranty damage to the towed vehicle will result.
- This bracket is only warranted for the original installation. Installing a used bracket on another vehicle is not recommended and will void the warranty.



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**


KS

ROADMASTER, Inc.



1. **Important:** please use all supplied bolts and parts and read all instructions carefully before beginning this installation. The majority of questions you may have can be answered within the text, and proper installation will ensure safe and secure travel. Now, begin the installation by removing five plastic fasteners and two 10mm (head) bolts attaching the air box and upper fascia to the core support (Fig.C – circles). Now, remove the air box as indicated (Fig.C – arrow).

2. On each side, remove one Phillips screw attaching the corner of the fascia to the fender (Fig.D).

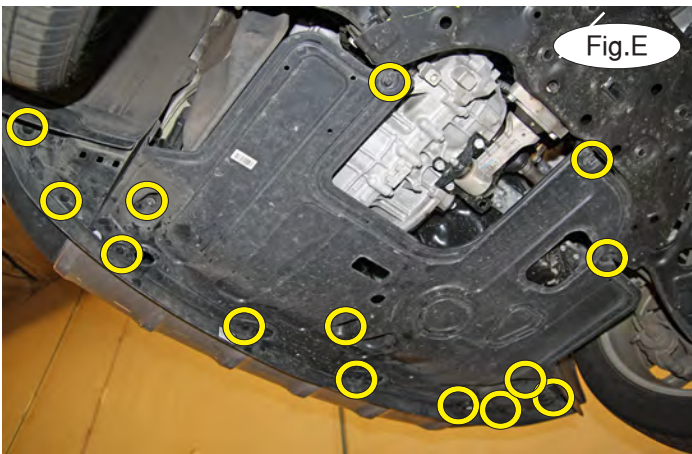

3. Remove eight plastic fasteners and six 10mm (head) bolts attaching the fender liner to the fascia and the splash shield to the vehicle (Fig.E).

4. On each side, pull back on the upper corner of the fascia and use a flathead screwdriver to pry up on the plastic clip to unsnap it (Fig.F).

5. On each side, pull out and forward on the corners of the fascia to remove it (Fig.G). Disconnect the fog lights, if the vehicle is so equipped.






# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**

KS

ROADMASTER, Inc.

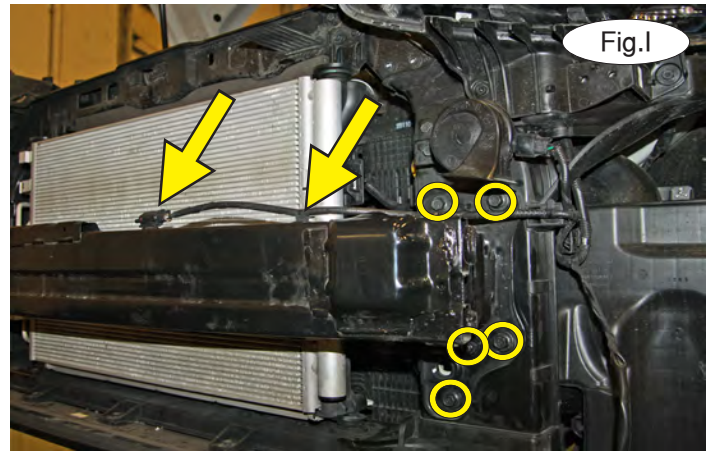


6. Remove the two air dams from the radiator (Fig.H). The air dams will not be replaced. *Note:* retain the air dams in case the main receiver brace is ever removed from the vehicle.

7. Disconnect the ambient temperature sensor and its loom by releasing two plastic fasteners (Fig.I – arrows). Then, on each side, remove four 12mm (head) bolts and one 10mm (head) nut attaching the bumper core to the frame (Fig.I – circles).



8. On each side, use a 3/8" drill to enlarge the two existing frame holes inside the frame (Fig.J).

9. Working on the driver's side only, place the supplied 1/2" x 2" bolt through the driver's side rear frame brace and slip it behind the bumper mounting flange (Fig.K) and over the holes you enlarged in the previous step. Bolt it into place using the supplied 3/8" x 3/4" bolt and 3/8" lock washer. Then, slip the 3/8" threaded backing plate with rod behind the flange and over the bottom hole of the rear frame brace. Bolt it into place using a 3/8" x 3/4" bolt and 3/8" lock washer (Fig.L). Torque the bolts to the bolt torque requirements found at the end of these instructions. *Note:* use Loctite® Red on the bolts.

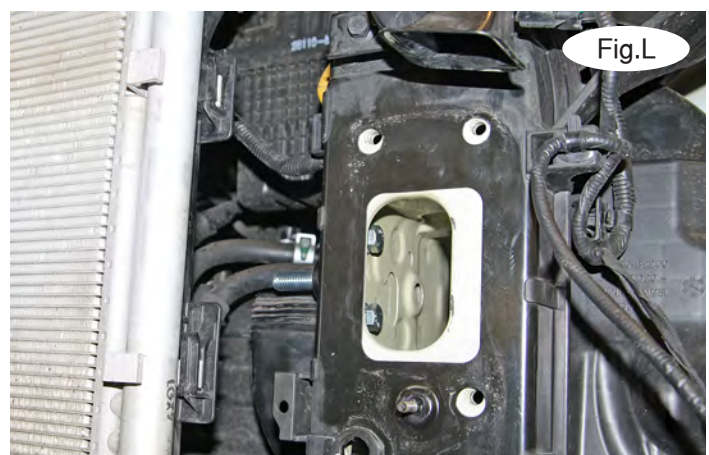

10. Repeat step 9 for the passenger side of the vehicle.



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**

KS

ROADMASTER, Inc.



11. Replace the bumper core by reversing step 7.

12. On each side, place a 3/16" x 1" x 2" backing plate over one of the supplied 1/2" x 2" bolts and then from the back side, bolt through the existing hole in the bumper core support. Place another 3/16" x 1" x 2" backing plate over the bolt (Fig.M).



13. Place the main receiver brace over the bolts and finish with a 1/2" lock washer and nut on the bolts you installed in the previous step (Fig.N).

14. On each side, place the two-holed plate over the supplied U bolt, and place the U bolt over the bumper core and through the existing holes in the main receiver brace. Finish the U bolts with two-way lock nuts (Fig.O). *Note:* the two-way locknuts have a dimple on the side and are self-locking.

15. On each side, slide the rear support bracket over the exposed stud from a previous step and finish with 1/2" lock washer and 1/2" nut. Then, bolt it to the main receiver brace using the supplied 1/2" x 1 1/4" bolts, 1/2" lock washers and 1/2" nuts (Fig.P).



16. Tighten all bolts to the bolt torque requirements found at the end of these instructions. *Note:* use Loctite® Red on all nuts and bolts.

17. Trim the fascia as shown in Figure Q.

18. Reinstall the fascia, reversing steps 1-5.



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**



KS

ROADMASTER, Inc.



19. **Note: the following four images are for illustration purposes only, as your specific application may be slightly different.**

The spring-loaded pin on the removable arm snaps into a notch on the receiver, locking the removable arm into its final towing position. Before inserting each arm into the receiver, verify that the spring is working by ensuring that the spring-loaded pin moves easily back and forth within the barrel when pulled and that it can be pulled flush with the face of the barrel (Fig.R and Fig.S).

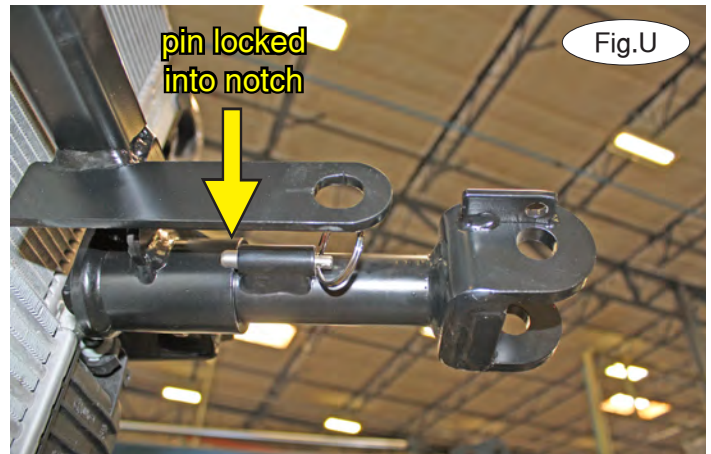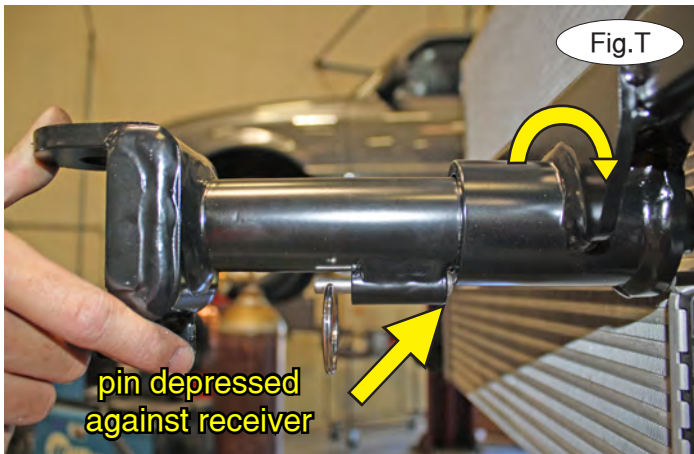

20. On each side, insert the removable front bracket arm into the front receiver 90 degrees from its final towing position, depressing the spring-loaded pin against the receiver (Fig.T). Now, twist back 90 degrees until the spring-loaded pin snaps into place in the notch on the receiver, locking the arm into place in its final towing position (Fig.U).

**Please note: it is the owner's responsibility to ensure the locking of the pins before towing. Otherwise, failure of the towing system will result.**

21. Install the tow bar to the mounting bracket according to the manufacturer's instructions.



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 522115-5**

KS

ROADMASTER, Inc.

### IMPORTANT!

**Safety cables are required by law. When towing, connect safety cables to the safety cable tab shown in Figure V. Make certain there is adequate slack in the cables to allow a full turning radius; otherwise, damage will result. If necessary, longer cables or cable extensions are available.**

*Note:* if the bracket is so equipped, the holes in the alignment tabs which are welded to the arms and main receiver braces are for padlocks only. Under no circumstances should you bolt the alignment tabs together. Bolting the alignment tabs together may result in non-warranty damage to the bracket.

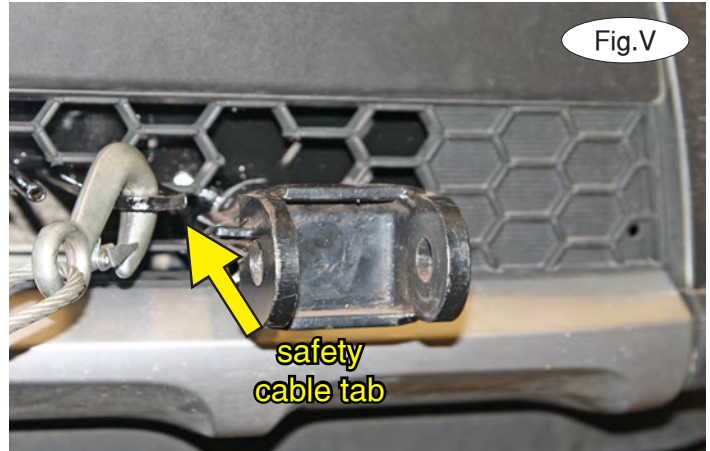


Fig.V

### Three options for attaching the wiring plug to the main receiver brace

**For six-wire plugs:** use the two supplied 3/4" self-tapping screws to attach the electrical plug directly to the rods on the front of the main receiver brace.

**For four-wire round plugs:** attach to the plug mounting plate and then use the two supplied 3/4" self-tapping screws to attach the mounting plate to the rods on the front of the main receiver brace.

**For four-wire flat plugs:** place the plug through the mounting plug plate, and then secure it using the supplied zip tie on the front of the plug (Fig.W). Use the two supplied 3/4" self-tapping screws to attach the mounting plate to the rods on the front of the main receiver brace.

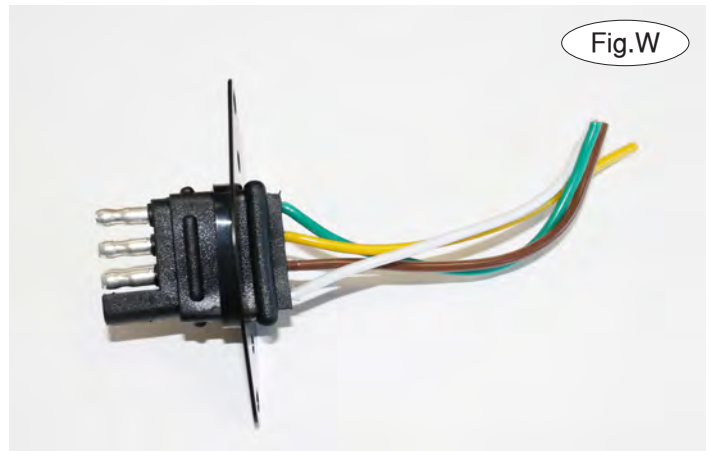


Fig.W

### BOLT TORQUE REQUIREMENTS

Note: The torque values represented below are intended as general guidelines. Torque requirements for specific applications may vary. Roadmaster does not warrant this information to be accurate for all applications and disclaims all liability for any claims or damages which may result from its use.

#### STANDARD BOLTS

Thread Size	Grade	Torque
5/16.....	5.....	13 ft./lb.
3/8.....	5.....	23 ft./lb.
7/16.....	5.....	37 ft./lb.
1/2.....	5.....	56 ft./lb.
5/8.....	5.....	150 ft./lb.

#### METRIC BOLTS

Thread Size	Grade	Plated / Unplated
8mm-1.0 .....	8.8 .....	20 ft./lb. 18 ft./lb.
8mm-1.25 .....	8.8 .....	19 ft./lb. 18 ft./lb.
10mm-1.25 .....	8.8 .....	38 ft./lb. 36 ft./lb.
10mm-1.5 .....	8.8 .....	37 ft./lb. 35 ft./lb.

#### METRIC BOLTS

Thread Size	Grade	Plated / Unplated
12mm-1.25 .....	8.8 .....	70 ft./lb. 65 ft./lb.
12mm-1.5 .....	8.8 .....	66 ft./lb. 61 ft./lb.
12mm-1.75 .....	8.8 .....	65 ft./lb. 60 ft./lb.
14mm-2.0 .....	8.8 .....	104 ft./lb. 97 ft./lb.

All illustrations and specifications contained herein are based on the latest information available at the time of publication approval. ROADMASTER, INC. reserves the right to make changes at any time without notice in material, specification and models or to discontinue models.